

**GEYER**



**2022-23**

Lighting Catalogue

**GEYER**



A full range of LED lamps and LED lighting fixtures that cover all Lighting applications for Indoor and Outdoor use have been created by **GEYER HELLAS**. There is an everywhere solution for industrial, commercial etc working area.

## Lamps

Filament clear, matt and vintage lamp series are the ideal solution for decorative and architectural lighting, mostly in coffee shops, restaurants, parks and houses. They stand out for their manufacturing quality and design variety. Their dimming function can help even with the most specialized and unique demands. Public illumination lamps are highly reliable while ensuring high levels of energy saving. Finally, they ease the functionality and maintenance of the municipality network.




## Architectural Illumination

Our company developed pioneering lighting fixtures, which provide solutions for the most demanding architectural applications. An important new product is the INNOVA linear track light that can be installed on a track rail and in combination with the Spot track lights, can be the best solution for shopping stores, supermarkets etc. either with general or directional illumination. Plaster lightings and spots are the ideal solution for homes as well as for every difficult project. Pendants stand out for their quality, simplicity and aesthetics. New panels and floodlights, with 5 years warranty, are now here to complement our product range. Our outdoor lighting lamps have high quality standards. They are perfect for private and public areas and can contribute to the creation of architectural masterpieces through their elegance and robustness.

## Public Illumination

Street lighting lamps can achieve major energy savings compared to the classic mercury and sodium lamps. Specifically, these savings are more than 70%. The various types of lighting which they have make them ideal for high speed roads urban roads, urban and industrial areas and parking lots. Public square, park and garden lights combine elegant design with the most advanced LED technology. Their traditional and modern design is remarkable. They are built to endure the most difficult conditions while being a premium solution for park, pavement and marina lighting. Finally, stadium lights are ideal for every pitch and all the required lighting levels.



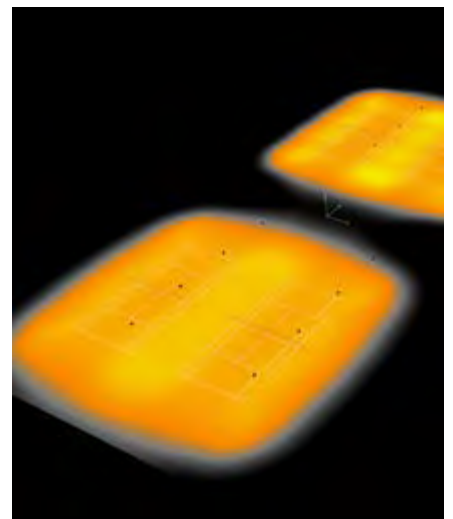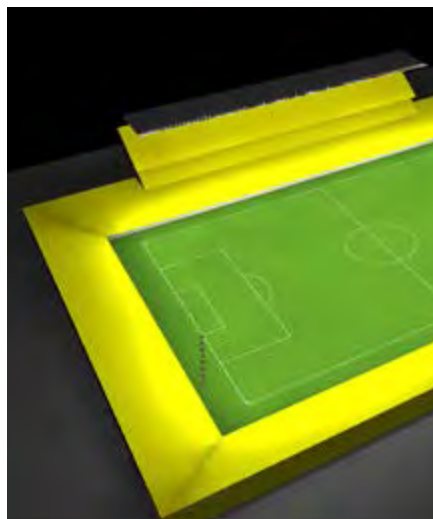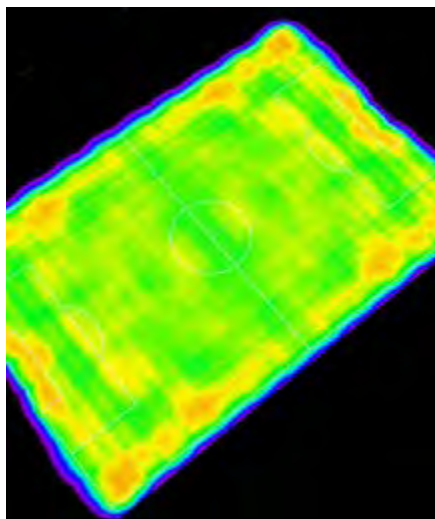

Our company provides **PROFESSIONAL PHOTOMETRIC DESIGN** for several public sectors, including outdoor and indoor lighting, as well as any other lighting solution for high architectural requirements.





20

## CHAPTER A

# Lamps

|                                   |    |
|-----------------------------------|----|
| LED Filament                      | 7  |
| Crown Mirror Filament             | 16 |
| LED Vintage Lamps                 | 18 |
| LED Color Lamps                   | 22 |
| LED Lamps                         | 27 |
| LED Special Lamps                 | 46 |
| LED Street Lamps                  | 53 |
| LED Tubes                         | 55 |
| Halogen Lamps                     | 64 |
| Conversion Lamp Holders           | 71 |
| Fluorescent Lamps                 | 74 |
| Fluorescent UV-A Lamps            | 77 |
| Fluorescent Blacklight Lamps      | 80 |
| Fluorescent Germicidal UV-C Lamps | 83 |
| High Pressure Lamps               | 86 |

## CHAPTER B

# Architecture Illumination

|                               |     |
|-------------------------------|-----|
| Downlights                    | 90  |
| LED Panels                    | 102 |
| Lighting Fixtures             | 115 |
| PIR Sensors                   | 122 |
| Emergency Lights              | 126 |
| Highbays                      | 128 |
| LED Canopy                    | 133 |
| Street Lights                 | 135 |
| LED Floodlights               | 137 |
| Sports Lights Stadium & Arena | 149 |



# 2022-2023

ral  
on

## CHAPTER C Public Lighting

|                   |     |
|-------------------|-----|
| LED Strips        | 152 |
| Track Lights      | 191 |
| Linear Lights     | 212 |
| LED Mirror Lights | 218 |
| Spots             | 222 |
| Mini Spots        | 229 |
| Gypsum Lights     | 246 |
| Pendant Lights    | 264 |
| Outdoor Lights    | 283 |

|                                                  |     |
|--------------------------------------------------|-----|
| City Lights                                      | 321 |
| Street Lights                                    | 331 |
| Industrial Lights for Airports, Ports, Logistics | 339 |
| Tunnel Lights                                    | 341 |

**GEYER**

# CHAPTER A


# Lamps



## LED **Filament**



## Filament Bulb 4W




RA

≥80

220-240  
VAC2 Years  
Warranty

| CODE    |   | TYPE  | WATT | CCT  | BASE | LUMEN |        |
|---------|---|-------|------|------|------|-------|--------|
| LFAW274 | E | CLEAR | 4    | 2700 | E27  | 470   | 10/100 |
| LFAC274 | E | CLEAR | 4    | 4000 | E27  | 470   | 10/100 |

## Filament Bulb 6W



dimmable


RA

≥80

220-240  
VAC2 Years  
Warranty

| CODE     |   | TYPE  | WATT | CCT  | BASE | LUMEN |        |
|----------|---|-------|------|------|------|-------|--------|
| LFAW276  | E | CLEAR | 6    | 2700 | E27  | 700   | 10/100 |
| LFAC276  | E | CLEAR | 6    | 4000 | E27  | 700   | 10/100 |
| LFAW276D | F | CLEAR | 6    | 2700 | E27  | 600   | 10/100 |
| LFAC276D | F | CLEAR | 6    | 4000 | E27  | 600   | 10/100 |

## Filament Bulb 8W



dimmable


RA

≥80

220-240  
VAC2 Years  
Warranty

| CODE     |   | TYPE  | WATT | CCT  | BASE | LUMEN |        |
|----------|---|-------|------|------|------|-------|--------|
| LFAW278  | E | CLEAR | 8    | 2700 | E27  | 1055  | 10/100 |
| LFAC278  | E | CLEAR | 8    | 4000 | E27  | 1055  | 10/100 |
| LFAW278D | F | CLEAR | 8    | 2700 | E27  | 880   | 10/100 |
| LFAC278D | F | CLEAR | 8    | 4000 | E27  | 880   | 10/100 |

## Filament Bulb 12W



RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |                                                                                   | TYPE  | WATT | CCT  | BASE | LUMEN |  |
|----------|-----------------------------------------------------------------------------------|-------|------|------|------|-------|-------------------------------------------------------------------------------------|
| LFAW2712 |  | CLEAR | 12   | 2700 | E27  | 1521  | 10/100                                                                              |
| LFAC2712 |  | CLEAR | 12   | 4000 | E27  | 1521  | 10/100                                                                              |

## Filament Candle 4W



320°



dimmable

RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |                                                                                     | TYPE  | WATT | CCT  | BASE | LUMEN |  |
|----------|-------------------------------------------------------------------------------------|-------|------|------|------|-------|---------------------------------------------------------------------------------------|
| LFCW144  |  | CLEAR | 4    | 2700 | E14  | 470   | 10/100                                                                                |
| LFCC144  |  | CLEAR | 4    | 4000 | E14  | 470   | 10/100                                                                                |
| LFCW144D |  | CLEAR | 4    | 2700 | E14  | 380   | 10/100                                                                                |
| LFCC144D |  | CLEAR | 4    | 4000 | E14  | 380   | 10/100                                                                                |

## Filament Mini Globe 4W E14



320°



dimmable

RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h


| CODE      |                                                                                     | TYPE  | WATT | CCT  | BASE | LUMEN |  |
|-----------|-------------------------------------------------------------------------------------|-------|------|------|------|-------|---------------------------------------------------------------------------------------|
| LFGLW144  |  | CLEAR | 4    | 2700 | E14  | 470   | 10/100                                                                                |
| LFGLC144  |  | CLEAR | 4    | 4000 | E14  | 470   | 10/100                                                                                |
| LFGLW144D |  | CLEAR | 4    | 2700 | E14  | 380   | 10/100                                                                                |
| LFGLC144D |  | CLEAR | 4    | 4000 | E14  | 380   | 10/100                                                                                |

## Filament Mini Globe 4W E27




| CODE      |          | TYPE  | WATT | CCT  | BASE | LUMEN |        |
|-----------|----------|-------|------|------|------|-------|--------|
| LFGLW274  | <b>E</b> | CLEAR | 4    | 2700 | E27  | 470   | 10/100 |
| LFGLC274  | <b>E</b> | CLEAR | 4    | 4000 | E27  | 470   | 10/100 |
| LFGLW274D | <b>F</b> | CLEAR | 4    | 2700 | E27  | 380   | 10/100 |
| LFGLC274D | <b>F</b> | CLEAR | 4    | 4000 | E27  | 380   | 10/100 |

## Filament Globe G95 6W




| CODE     |          | TYPE  | WATT | CCT  | BASE | LUMEN |      |
|----------|----------|-------|------|------|------|-------|------|
| LFGNW276 | <b>E</b> | CLEAR | 6    | 2700 | E27  | 700   | 1/50 |
| LFGNC276 | <b>E</b> | CLEAR | 6    | 4000 | E27  | 700   | 1/50 |

## Filament Globe G95 12W




| CODE        |          | TYPE  | WATT | CCT  | BASE | LUMEN |      |
|-------------|----------|-------|------|------|------|-------|------|
| LFG95NW2712 | <b>E</b> | CLEAR | 12   | 2700 | E27  | 1521  | 1/50 |
| LFG95NC2712 | <b>E</b> | CLEAR | 12   | 4000 | E27  | 1521  | 1/50 |

## Filament Globe G125 8W




| CODE      |  | TYPE  | WATT | CCT  | BASE | LUMEN |      |
|-----------|--|-------|------|------|------|-------|------|
| LFGNW278  |  | CLEAR | 8    | 2700 | E27  | 1055  | 5/20 |
| LFGNC278  |  | CLEAR | 8    | 4000 | E27  | 1055  | 5/20 |
| LFGNW278D |  | CLEAR | 8    | 2700 | E27  | 880   | 5/20 |
| LFGNC278D |  | CLEAR | 8    | 4000 | E27  | 880   | 5/20 |

## Filament Globe G125 12W



| CODE      |  | TYPE  | WATT | CCT  | BASE | LUMEN |      |
|-----------|--|-------|------|------|------|-------|------|
| LFGNW2712 |  | CLEAR | 12   | 2700 | E27  | 1521  | 5/20 |
| LFGNC2712 |  | CLEAR | 12   | 4000 | E27  | 1521  | 5/20 |

## Filament Bulb 4W



RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |   | TYPE | WATT | CCT  | BASE | LUMEN |        |
|----------|---|------|------|------|------|-------|--------|
| LFSAW274 | F | MATT | 4    | 2700 | E27  | 400   | 10/100 |
| LFSAC274 | F | MATT | 4    | 4000 | E27  | 400   | 10/100 |

## Filament Bulb 6W



RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |   | TYPE | WATT | CCT  | BASE | LUMEN |        |
|----------|---|------|------|------|------|-------|--------|
| LFSAW276 | F | MATT | 6    | 2700 | E27  | 650   | 10/100 |
| LFSAC276 | F | MATT | 6    | 4000 | E27  | 650   | 10/100 |

## Filament Bulb 8W



RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |   | TYPE | WATT | CCT  | BASE | LUMEN |        |
|----------|---|------|------|------|------|-------|--------|
| LFSAW278 | E | MATT | 8    | 2700 | E27  | 950   | 10/100 |
| LFSAC278 | E | MATT | 8    | 4000 | E27  | 950   | 10/100 |



## Filament Candle 4W



320°

RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |   | TYPE | WATT | CCT  | BASE | LUMEN |        |
|----------|---|------|------|------|------|-------|--------|
| LFCSW144 | F | MATT | 4    | 2700 | E14  | 400   | 10/100 |
| LFCSC144 | F | MATT | 4    | 4000 | E14  | 400   | 10/100 |

## Filament Mini Globe 4W E14



320°

RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |   | TYPE | WATT | CCT  | BASE | LUMEN |        |
|----------|---|------|------|------|------|-------|--------|
| LFGSW144 | F | MATT | 4    | 2700 | E14  | 400   | 10/100 |
| LFGSC144 | F | MATT | 4    | 4000 | E14  | 400   | 10/100 |

## Filament Mini Globe 4W E27



320°

RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |   | TYPE | WATT | CCT  | BASE | LUMEN |        |
|----------|---|------|------|------|------|-------|--------|
| LFGSW274 | F | MATT | 4    | 2700 | E27  | 400   | 10/100 |
| LFGSC274 | F | MATT | 4    | 4000 | E27  | 400   | 10/100 |

## Filament Globe G95 5W


RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h



| CODE      |   | TYPE | WATT | CCT  | BASE | LUMEN |      |
|-----------|---|------|------|------|------|-------|------|
| LFGNSW276 | F | MATT | 6    | 2700 | E27  | 650   | 1/50 |
| LFGNSC276 | F | MATT | 6    | 4000 | E27  | 650   | 1/50 |

## Filament Globe G125 8W


RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h



| CODE      |   | TYPE | WATT | CCT  | BASE | LUMEN |      |
|-----------|---|------|------|------|------|-------|------|
| LFGNSW278 | E | MATT | 8    | 2700 | E27  | 950   | 5/20 |
| LFGNSC278 | E | MATT | 8    | 4000 | E27  | 950   | 5/20 |

## Filament R50 5W



30°

RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE    |   | TYPE | WATT | CCT  | BASE | LUMEN |         |
|---------|---|------|------|------|------|-------|---------|
| LFKWE14 | F | R50  | 5    | 2700 | E14  | 470   | 1/5/100 |
| LFKCE14 | F | R50  | 5    | 4000 | E14  | 470   | 1/5/100 |

## Filament R63 8W



30°

RA


≥80

220-240  
VAC2 Years  
Warranty

15.000h

| CODE    |   | TYPE | WATT | CCT  | BASE | LUMEN |         |
|---------|---|------|------|------|------|-------|---------|
| LFKWE27 | F | R63  | 8    | 2700 | E27  | 710   | 1/5/100 |
| LFKCE27 | F | R63  | 8    | 4000 | E27  | 710   | 1/5/100 |

## Filament R80 11W



30°

RA

≥80

220-240  
VAC2 Years  
Warranty


15.000h

| CODE      |   | TYPE | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|------|-------|---------|
| LFK80WE27 | F | R80  | 11   | 2700 | E27  | 980   | 1/10/50 |
| LFK80CE27 | F | R80  | 11   | 4000 | E27  | 980   | 1/10/50 |



## Crown Mirror **Filament**

## Crown Mirror Filament Bulb



120°



dimmable

RA

≥80



220-240 VAC


2 Years Warranty



15.000h

| CODE      |   |   | WATT | CCT  | BASE | LUMEN |       |
|-----------|---|---|------|------|------|-------|-------|
| LFMA276SD | F | ● | 6    | 2700 | E27  | 550   | 10/50 |
| LFMA276GD | F | ● | 6    | 2700 | E27  | 550   | 10/50 |
| LFMA276CD | F | ● | 6    | 2700 | E27  | 550   | 10/50 |

## Globe G95 Crown Mirror Filament



120°



dimmable

RA

≥80



220-240 VAC


2 Years Warranty



15.000h

| CODE       |   |   | WATT | CCT  | BASE | LUMEN |      |
|------------|---|---|------|------|------|-------|------|
| LFGNM276SD | F | ● | 6    | 2700 | E27  | 550   | 1/20 |
| LFGNM276GD | F | ● | 6    | 2700 | E27  | 550   | 1/20 |
| LFGNM276CD | F | ● | 6    | 2700 | E27  | 550   | 1/20 |

## Globe G125 Crown Mirror Filament



120°



dimmable

RA

≥80



220-240 VAC

2 Years Warranty



15.000h

| CODE       |   |   | WATT | CCT  | BASE | LUMEN |      |
|------------|---|---|------|------|------|-------|------|
| LFGBM276SD | F | ● | 6    | 2700 | E27  | 480   | 1/20 |
| LFGBM276GD | F | ● | 6    | 2700 | E27  | 480   | 1/20 |
| LFGBM276CD | F | ● | 6    | 2700 | E27  | 480   | 1/20 |




## LED **Vintage Lamps**





ST64 Vintage 6W




320°
 dimmable
 RA ≥80
 220-240 VAC
 2 Years Warranty
 25.000h

| CODE    |  | WATT | CCT  | BASE | LUMEN |       |
|---------|--|------|------|------|-------|-------|
| LVST64  |  | 6    | 2000 | E27  | 550   | 10/50 |
| LVST64D |  | 6    | 2000 | E27  | 500   | 10/50 |



Vintage Bulb 6W




320°
 dimmable
 RA ≥80
 220-240 VAC
 2 Years Warranty
 25.000h

| CODE   |  | WATT | CCT  | BASE | LUMEN |        |
|--------|--|------|------|------|-------|--------|
| LVA27  |  | 6    | 2000 | E27  | 550   | 10/100 |
| LVA27D |  | 6    | 2000 | E27  | 500   | 10/100 |



Vintage Candle 4W




320°
 dimmable
 RA ≥80
 220-240 VAC
 2 Years Warranty
 25.000h

| CODE   |  | WATT | CCT  | BASE | LUMEN |        |
|--------|--|------|------|------|-------|--------|
| LVC14  |  | 4    | 2000 | E14  | 350   | 10/100 |
| LVC14D |  | 4    | 2000 | E14  | 320   | 10/100 |



T30-185 Vintage 6W



320°



dimmable

RA  
≥80



220-240  
VAC

2 Years  
Warranty




25.000h

| CODE       |   | WATT | CCT  | BASE | LUMEN |       |
|------------|---|------|------|------|-------|-------|
| LVT30-185  | F | 6    | 2000 | E27  | 550   | 10/50 |
| LVT30-185D | G | 6    | 2000 | E27  | 500   | 10/50 |



T30-225 Vintage 6W



320°



dimmable

RA  
≥80



220-240  
VAC

2 Years  
Warranty




25.000h

| CODE       |   | WATT | CCT  | BASE | LUMEN |       |
|------------|---|------|------|------|-------|-------|
| LVT30-225  | F | 6    | 2000 | E27  | 550   | 10/50 |
| LVT30-225D | G | 6    | 2000 | E27  | 500   | 10/50 |



T45 Vintage 6W



320°



dimmable

RA  
≥80



220-240  
VAC


2 Years  
Warranty



25.000h

| CODE   |   | WATT | CCT  | BASE | LUMEN |        |
|--------|---|------|------|------|-------|--------|
| LVT45  | F | 6    | 2000 | E27  | 550   | 10/100 |
| LVT45D | G | 6    | 2000 | E27  | 500   | 10/100 |


## BT75 Vintage 6W



320° dimmable RA ≥80 220-240 VAC 2 Years Warranty 25.000h

| CODE    |   | WATT | CCT  | BASE | LUMEN |       |
|---------|---|------|------|------|-------|-------|
| LVBT75  | F | 6    | 2000 | E27  | 550   | 10/50 |
| LVBT75D | G | 6    | 2000 | E27  | 500   | 10/50 |


## Vintage Globe G95 6W



320° dimmable RA ≥80 220-240 VAC 2 Years Warranty 25.000h

| CODE   |   | WATT | CCT  | BASE | LUMEN |       |
|--------|---|------|------|------|-------|-------|
| LVG95  | F | 6    | 2000 | E27  | 550   | 10/50 |
| LVG95D | G | 6    | 2000 | E27  | 500   | 10/50 |

## Vintage Globe G125 6W




320° dimmable RA ≥80 220-240 VAC 2 Years Warranty 25.000h

| CODE    |   | WATT | CCT  | BASE | LUMEN |      |
|---------|---|------|------|------|-------|------|
| LVG125  | F | 6    | 2000 | E27  | 550   | 1/20 |
| LVG125D | G | 6    | 2000 | E27  | 500   | 1/20 |



## LED Color Lamps

## T20 1.3W Red



RA  
≥80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE  |  | WATT | CCT | BASE | LUMEN |        |
|-------|--|------|-----|------|-------|--------|
| LNL-R |  | 1.3  |     | E14  | 15    | 10/200 |

## T20 1.3W Green



RA  
≥80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE  |  | WATT | CCT | BASE | LUMEN |        |
|-------|--|------|-----|------|-------|--------|
| LNL-G |  | 1.3  |     | E14  | 70    | 10/200 |

## T20 1.3W Yellow



RA  
≥80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE  |  | WATT | CCT | BASE | LUMEN |        |
|-------|--|------|-----|------|-------|--------|
| LNL-Y |  | 1.3  |     | E14  | 45    | 10/200 |

T20 1.3W Blue



320°

RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE  |  | WATT | CCT | BASE | LUMEN |        |
|-------|--|------|-----|------|-------|--------|
| LNL-B |  | 1.3  |     | E14  | 15    | 10/200 |

T20 White



320°

RA

≥80

220-240  
VAC2 Years  
Warranty


15.000h



| CODE   |  | WATT | CCT  | BASE | LUMEN |        |
|--------|--|------|------|------|-------|--------|
| LNL-WW |  | 1.3  | 3000 | E14  | 70    | 10/200 |
| LFR2-C |  | 2    | 4000 | E14  | 150   | 10/200 |



## Filament Color Bulb Red



320°

RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE     |  | WATT | CCT | BASE | LUMEN |       |
|----------|--|------|-----|------|-------|-------|
| LFA274-R |  | 4    |     | E27  | 60    | 10/50 |

## Filament Color Bulb Green



320°

RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE     |  | WATT | CCT | BASE | LUMEN |       |
|----------|--|------|-----|------|-------|-------|
| LFA274-G |  | 4    |     | E27  | 300   | 10/50 |

## Filament Color Bulb Yellow



320°

RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE     |  | WATT | CCT | BASE | LUMEN |       |
|----------|--|------|-----|------|-------|-------|
| LFA274-Y |  | 4    |     | E27  | 300   | 10/50 |

## Filament Color Bulb Blue



320°

RA

≥80

220-240  
VAC2 Years  
Warranty

15.000h




| CODE     |  | WATT | CCT | BASE | LUMEN |       |
|----------|--|------|-----|------|-------|-------|
| LFA274-B |  | 4    |     | E27  | 60    | 10/50 |



## LED Lamps

## LED Bulb 4.9W



RA  
>80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LAW276E  | F | 4.9  | 3000 | E27  | 470   | 1/10/50 |
| LACE276E | F | 4.9  | 4000 | E27  | 470   | 1/10/50 |
| LADE276E | F | 4.9  | 6500 | E27  | 470   | 1/10/50 |

## LED Bulb 8W



RA  
>80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LAW279E  | F | 8    | 3000 | E27  | 806   | 1/10/50 |
| LACE279E | F | 8    | 4000 | E27  | 806   | 1/10/50 |
| LADE279E | F | 8    | 6500 | E27  | 806   | 1/10/50 |

## LED Bulb 9.5W



RA  
>80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LAW2710E  | E | 9.5  | 3000 | E27  | 1055  | 1/10/50 |
| LACE2710E | E | 9.5  | 4000 | E27  | 1055  | 1/10/50 |
| LADE2710E | E | 9.5  | 6500 | E27  | 1055  | 1/10/50 |


## LED Bulb 11W

180°  
RA >80220-240  
VAC2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LAWE2711E | E | 11   | 3000 | E27  | 1250  | 1/10/50 |
| LACE2711E | E | 11   | 4000 | E27  | 1250  | 1/10/50 |
| LADE2711E | E | 11   | 6500 | E27  | 1250  | 1/10/50 |


## LED Bulb 13W

180°  
RA ≥80220-240  
VAC2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LAWE2714E | E | 13   | 3000 | E27  | 1521  | 1/10/50 |
| LACE2714E | E | 13   | 4000 | E27  | 1521  | 1/10/50 |
| LADE2714E | E | 13   | 6500 | E27  | 1521  | 1/10/50 |


## LED Bulb 16W Premium

200°  
RA ≥80180-260  
VAC3 Years  
Warranty

25.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LAWE2716 | F | 16   | 3000 | E27  | 1600  | 1/10/50 |
| LACE2716 | F | 16   | 4000 | E27  | 1650  | 1/10/50 |
| LADE2716 | F | 16   | 6500 | E27  | 1700  | 1/10/50 |

## LED Candle 2.5W


RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h



| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LCWE143E | F | 2.5  | 3000 | E14  | 250   | 1/10/50 |
| LCCE143E | F | 2.5  | 4000 | E14  | 250   | 1/10/50 |
| LCDE143E | F | 2.5  | 6500 | E14  | 250   | 1/10/50 |

## LED Candle 4.5W


RA  
>80220-240  
VAC2 Years  
Warranty

15.000h



| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LCWE145E | F | 4.5  | 3000 | E14  | 470   | 1/10/50 |
| LCCE145E | F | 4.5  | 4000 | E14  | 470   | 1/10/50 |
| LCDE145E | F | 4.5  | 6500 | E14  | 470   | 1/10/50 |

## LED Mini Globe 2.5W E14



150°

RA

&gt;80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LGLWE143E | F | 2.5  | 3000 | E14  | 250   | 1/10/50 |
| LGLCE143E | F | 2.5  | 4000 | E14  | 250   | 1/10/50 |
| LGLDE143E | F | 2.5  | 6500 | E14  | 250   | 1/10/50 |

## LED Mini Globe 4.5W E14



150°

RA

&gt;80

220-240  
VAC2 Years  
Warranty


15.000h



| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LGLWE145E | F | 4.5  | 3000 | E14  | 470   | 1/10/50 |
| LGLCE145E | F | 4.5  | 4000 | E14  | 470   | 1/10/50 |
| LGLDE145E | F | 4.5  | 6500 | E14  | 470   | 1/10/50 |



## LED Mini Globe 2.5W E27



150°

RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LGLWE273E | F | 2.5  | 3000 | E27  | 250   | 1/10/50 |
| LGLCE273E | F | 2.5  | 4000 | E27  | 250   | 1/10/50 |
| LGLDE273E | F | 2.5  | 6500 | E27  | 250   | 1/10/50 |

## LED Mini Globe 4.5W E27



150°

RA

&gt;80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LGLWE275E | F | 4.5  | 3000 | E27  | 470   | 1/10/50 |
| LGLCE275E | F | 4.5  | 4000 | E27  | 470   | 1/10/50 |
| LGLDE275E | F | 4.5  | 6500 | E27  | 470   | 1/10/50 |

## LED Globe G95 12W Premium



RA  
≥80


180-260  
VAC

3 Years  
Warranty

25.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |        |
|-----------|---|------|------|------|-------|--------|
| LGNWE2712 | F | 12   | 3000 | E27  | 1160  | 1/5/20 |
| LGNCE2712 | F | 12   | 4000 | E27  | 1180  | 1/5/20 |
| LGNDE2712 | F | 12   | 6500 | E27  | 1200  | 1/5/20 |

## LED Globe G120 14W Premium



RA  
≥80


180-260  
VAC

3 Years  
Warranty

25.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |        |
|-----------|---|------|------|------|-------|--------|
| LGNWE2714 | F | 14   | 3000 | E27  | 1380  | 1/5/20 |
| LGNCE2714 | F | 14   | 4000 | E27  | 1400  | 1/5/20 |
| LGNDE2714 | F | 14   | 6500 | E27  | 1420  | 1/5/20 |

## LED Globe G120 18/20W Premium



RA  
≥80


180-260  
VAC

3 Years  
Warranty

25.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |        |
|-----------|---|------|------|------|-------|--------|
| LGNWE2718 | F | 18   | 3000 | E27  | 1850  | 1/5/20 |
| LGNCE2718 | F | 18   | 4000 | E27  | 1900  | 1/5/20 |
| LGNDE2718 | F | 18   | 6500 | E27  | 1950  | 1/5/20 |
| LGNWE2720 | E | 20   | 3000 | E27  | 2450  | 1/5/20 |
| LGNCE2720 | E | 20   | 4000 | E27  | 2500  | 1/5/20 |
| LGNDE2720 | E | 20   | 6500 | E27  | 2550  | 1/5/20 |

## LED Stick T37 9W



270°

RA


≥80

180-265  
VAC2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |        |
|-----------|---|------|------|------|-------|--------|
| LT37W9MAS | F | 9    | 3000 | E27  | 820   | 10/100 |
| LT37C9MAS | F | 9    | 4000 | E27  | 820   | 10/100 |

## LED Bulb 12-30V AC/DC



200°

IP44

RA


≥80

12-30V  
AC/DC3 Years  
Warranty

25.000h

| CODE        |   | WATT | CCT  | BASE | LUMEN |         |
|-------------|---|------|------|------|-------|---------|
| LAWE2781230 | F | 8    | 3000 | E27  | 790   | 1/5/100 |
| LACE2781230 | F | 8    | 4000 | E27  | 810   | 1/5/100 |

## LED Bulb 24-42V AC/DC



200°

IP44

RA

≥80


24-42V  
AC/DC3 Years  
Warranty

25.000h

| CODE       |   | WATT | CCT  | BASE | LUMEN |         |
|------------|---|------|------|------|-------|---------|
| LAWE278-42 | F | 8    | 3000 | E27  | 790   | 1/10/50 |
| LACE278-42 | F | 8    | 4000 | E27  | 810   | 1/10/50 |



LED Bulb 11W, Motion Sensor



220°

RA

≥80

3 Years Warranty




20.000h

60" ON

| CODE       |   | WATT | CCT  | BASE | LUMEN |         |
|------------|---|------|------|------|-------|---------|
| LAWE2711MS | F | 11   | 3000 | E27  | 1050  | 1/10/50 |
| LACE2711MS | F | 11   | 4000 | E27  | 1100  | 1/10/50 |



LED Bulb 9W, Sensor Day/Night



220°

RA

≥80

180-260 VAC

3 Years Warranty




25.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LAWE279DN | F | 9    | 3000 | E27  | 820   | 1/10/50 |
| LACE279DN | F | 9    | 4000 | E27  | 840   | 1/10/50 |



LED Bulb 12W, Sensor Day/Night



220°

RA

≥80

180-260 VAC


3 Years Warranty



25.000h

| CODE         |   | WATT | CCT  | BASE | LUMEN |         |
|--------------|---|------|------|------|-------|---------|
| LAWE2712DNG2 | F | 12   | 3000 | E27  | 1160  | 1/10/50 |
| LACE2712DNG2 | F | 12   | 4000 | E27  | 1200  | 1/10/50 |

## High Power Economy



180°

IP44

RA

≥80


170-240  
VAC2 Years  
Warranty

20.000h



| CODE       |   | WATT | CCT  | BASE    | LUMEN | DIMENSIONS |     |      |
|------------|---|------|------|---------|-------|------------|-----|------|
|            |   |      |      |         |       | A          | B   |      |
| LHPC2720S  | F | 20   | 4000 | E27     | 1800  | 80         | 149 | 1/20 |
| LHPC2730S  | F | 30   | 4000 | E27     | 2700  | 100        | 162 | 1/20 |
| LHPC2740S  | F | 40   | 4000 | E27     | 3600  | 120        | 193 | 1/20 |
| LHPC2750S  | F | 50   | 4000 | E27     | 4500  | 140        | 230 | 1/16 |
| LHPC2760SA | F | 60   | 4000 | E27     | 5400  | 140        | 258 | 1/8  |
| LHPC2770SA | F | 70   | 4000 | E27/E40 | 6300  | 140        | 258 | 1/8  |
| LHPC2780SA | F | 80   | 4000 | E27/E40 | 7200  | 150        | 258 | 1/8  |

## High Power Premium



270°

IP44

RA

≥80

180-260  
VAC

PF&gt;0,9


3 Years  
Warranty

25.000h



| CODE     |   | WATT | CCT  | BASE | LUMEN | DIMENSIONS |     |      |
|----------|---|------|------|------|-------|------------|-----|------|
|          |   |      |      |      |       | A          | B   |      |
| LHPC2718 | F | 18   | 4000 | E27  | 1850  | 80         | 150 | 1/10 |
| LHPC2727 | F | 27   | 4000 | E27  | 2850  | 100        | 185 | 1/20 |
| LHPC2736 | F | 36   | 4000 | E27  | 3850  | 120        | 214 | 1/20 |

## LED PAR16 3W



120°

RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE   |   | WATT | CCT  | BASE | LUMEN |         |
|--------|---|------|------|------|-------|---------|
| LHGW3E | F | 3    | 3000 | GU10 | 300   | 1/10/50 |
| LHGC3E | F | 3    | 4000 | GU10 | 300   | 1/10/50 |
| LHGD3E | F | 3    | 6500 | GU10 | 300   | 1/10/50 |

## LED PAR16 5W



120°

RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h



| CODE   |   | WATT | CCT  | BASE | LUMEN |         |
|--------|---|------|------|------|-------|---------|
| LHGW6E | F | 5    | 3000 | GU10 | 470   | 1/10/50 |
| LHGC6E | F | 5    | 4000 | GU10 | 470   | 1/10/50 |
| LHGD6E | F | 5    | 6500 | GU10 | 470   | 1/10/50 |


## LED PAR16 5W, 36°

RA  
>80220-240  
VAC2 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LHGW536E | F | 5    | 3000 | GU10 | 470   | 1/10/50 |
| LHGC536E | F | 5    | 4000 | GU10 | 470   | 1/10/50 |
| LHGD536E | F | 5    | 6500 | GU10 | 470   | 1/10/50 |

## LED PAR16 5W, 36°, Dimmable




dimmable

RA  
≥80180-260 | 220-240  
VAC2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |       |
|-----------|---|------|------|------|-------|-------|
| LHGW536DE | F | 5    | 3000 | GU10 | 450   | 10/50 |
| LHGC536DE | F | 5    | 4000 | GU10 | 450   | 10/50 |

## LED PAR16 42V AC/DC


RA  
≥8042V  
AC/DC2 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LHGW5-42 | F | 5    | 3000 | GU10 | 400   | 1/10/50 |
| LHGC5-42 | F | 5    | 4000 | GU10 | 400   | 1/10/50 |




## LED PAR16 Glass 4.9W, 36°

RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |        |
|-----------|---|------|------|------|-------|--------|
| LHG53627E | F | 4.9  | 2700 | GU10 | 450   | 10/100 |
| LHG53630E | F | 4.9  | 3000 | GU10 | 450   | 10/100 |
| LHG53640E | F | 4.9  | 4000 | GU10 | 450   | 10/100 |
| LHG53665E | F | 4.9  | 6500 | GU10 | 450   | 10/100 |

## LED PAR16 Glass 4W, 36°, Dimmable




dimmable

RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h

| CODE       |   | WATT | CCT  | BASE | LUMEN |        |
|------------|---|------|------|------|-------|--------|
| LHG53627DE | E | 4    | 2700 | GU10 | 400   | 10/100 |
| LHG53630DE | E | 4    | 3000 | GU10 | 400   | 10/100 |
| LHG53640DE | E | 4    | 4000 | GU10 | 400   | 10/100 |


## LED PAR16 Glass 4.9W, 60°

RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |        |
|-----------|---|------|------|------|-------|--------|
| LHG56027E | F | 4.9  | 2700 | GU10 | 450   | 10/100 |
| LHG56030E | F | 4.9  | 3000 | GU10 | 450   | 10/100 |
| LHG56040E | F | 4.9  | 4000 | GU10 | 450   | 10/100 |
| LHG56065E | F | 4.9  | 6500 | GU10 | 450   | 10/100 |

## LED PAR16 Glass 4.9W, 120°



RA

≥80


220-240  
VAC2 Years  
Warranty

15.000h

| CODE       |   | WATT | CCT  | BASE | LUMEN |        |
|------------|---|------|------|------|-------|--------|
| LHG512027E | E | 4.9  | 2700 | GU10 | 550   | 10/100 |
| LHG512030E | E | 4.9  | 3000 | GU10 | 550   | 10/100 |
| LHG512040E | E | 4.9  | 4000 | GU10 | 550   | 10/100 |
| LHG512065E | E | 4.9  | 6500 | GU10 | 550   | 10/100 |



## MR11 2W Glass



120°

RA

≥80


12V  
AC/DC2 Years  
Warranty

15.000h



| CODE   |   | WATT | CCT  | BASE | LUMEN |          |
|--------|---|------|------|------|-------|----------|
| LMR11W | F | 2    | 3000 | GU4  | 150   | 1/10/200 |
| LMR11C | F | 2    | 4000 | GU4  | 160   | 1/10/200 |
| LMR11D | F | 2    | 6500 | GU4  | 160   | 1/10/200 |

## MR16 5.5W Glass, 36°



36°

RA

≥80


12V  
AC/DC2 Years  
Warranty

15.000h



| CODE      |   | WATT | CCT  | BASE  | LUMEN |          |
|-----------|---|------|------|-------|-------|----------|
| LHM53630E | F | 5.5  | 3000 | GU5.3 | 450   | 1/10/100 |
| LHM53640E | F | 5.5  | 4000 | GU5.3 | 450   | 1/10/100 |

## MR16 5W



120°

RA

≥80


12V  
AC/DC2 Years  
Warranty

15.000h



| CODE   |  | WATT | CCT  | BASE  | LUMEN |         |
|--------|--|------|------|-------|-------|---------|
| LHMW6E |  | 5    | 3000 | GU5.3 | 470   | 1/10/50 |
| LHMC6E |  | 5    | 4000 | GU5.3 | 470   | 1/10/50 |
| LHMD6E |  | 5    | 6500 | GU5.3 | 470   | 1/10/50 |

## MR16 6W, 36°



36°

RA

≥80


12V  
AC/DC2 Years  
Warranty

15.000h



| CODE     |  | WATT | CCT  | BASE  | LUMEN |         |
|----------|--|------|------|-------|-------|---------|
| LHMW636E |  | 6    | 3000 | GU5.3 | 470   | 1/10/50 |
| LHMC636E |  | 6    | 4000 | GU5.3 | 470   | 1/10/50 |
| LHMD636E |  | 6    | 6500 | GU5.3 | 470   | 1/10/50 |

## LED G4 1.5W



360°

RA

≥80


12-24V  
AC/DC2 Years  
Warranty

15.000h



| CODE   |   | WATT | CCT  | BASE | LUMEN |         |
|--------|---|------|------|------|-------|---------|
| LWG416 | F | 1.5  | 3000 | G4   | 150   | 1/5/200 |
| LCG416 | F | 1.5  | 4000 | G4   | 160   | 1/5/200 |

## LED G4 1.6W Dimmable



360°



dimmable

RA

≥80


12V  
AC/DC2 Years  
Warranty

15.000h



| CODE         |   | WATT | CCT  | BASE | LUMEN |          |
|--------------|---|------|------|------|-------|----------|
| LWG42-12/24D | F | 2    | 3000 | G4   | 180   | 1/10/200 |
| LCG42-12/24D | F | 2    | 4000 | G4   | 180   | 1/10/200 |

## LED G9 Glass 2.5W



360°


RA  
≥80220-240  
VAC2 Years  
Warranty

25.000h



| CODE     |   | WATT | CCT  | BASE | LUMEN |          |
|----------|---|------|------|------|-------|----------|
| LG92.5GW | F | 2.5  | 3000 | G9   | 230   | 1/10/100 |
| LG92.5GC | F | 2.5  | 4000 | G9   | 240   | 1/10/100 |

## LED G9 Glass 3.5W



360°


RA  
≥80220-240  
VAC2 Years  
Warranty

25.000h



| CODE     |   | WATT | CCT  | BASE | LUMEN |          |
|----------|---|------|------|------|-------|----------|
| LG93.5GW | E | 3.5  | 3000 | G9   | 470   | 1/10/200 |
| LG93.5GC | E | 3.5  | 4000 | G9   | 470   | 1/10/200 |


## LED G9 3.5W

RA  
≥80220-240  
VAC2 Years  
Warranty

20.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |          |
|-----------|---|------|------|------|-------|----------|
| LG93.5-PW | F | 3.5  | 3000 | G9   | 350   | 1/10/200 |
| LG93.5-PC | F | 3.5  | 4000 | G9   | 350   | 1/10/200 |

## LED G9 3.5W Dimmable




dimmable

RA  
≥80220-240  
VAC2 Years  
Warranty

20.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |          |
|----------|---|------|------|------|-------|----------|
| LG93.5WD | F | 3.5  | 3000 | G9   | 350   | 1/10/200 |
| LG93.5CD | F | 3.5  | 4000 | G9   | 350   | 1/10/200 |

## LED G9 4.8W

RA  
≥80220-240  
VAC2 Years  
Warranty

20.000h

| CODE    |   | WATT | CCT  | BASE | LUMEN |          |
|---------|---|------|------|------|-------|----------|
| LG95-PW | F | 4.8  | 3000 | G9   | 470   | 1/10/200 |
| LG95-PC | F | 4.8  | 4000 | G9   | 470   | 1/10/200 |






## LED Special Lamps



## LED R50 4.9W



RA  
≥80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LKWE145E | F | 4.9  | 3000 | E14  | 470   | 1/5/100 |
| LKCE145E | F | 4.9  | 4000 | E14  | 470   | 1/5/100 |

## LED R63 8W



RA  
≥80


220-240  
VAC

2 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |         |
|----------|---|------|------|------|-------|---------|
| LKWE278E | F | 8    | 3000 | E27  | 806   | 1/5/100 |
| LKCE278E | F | 8    | 4000 | E27  | 806   | 1/5/100 |

## LED R80 12W



RA  
≥80


220-240  
VAC

2 Years  
Warranty

20.000h

| CODE       |   | WATT | CCT  | BASE | LUMEN |         |
|------------|---|------|------|------|-------|---------|
| LK80WE2712 | F | 12   | 3000 | E27  | 1050  | 1/10/50 |
| LK80CE2712 | F | 12   | 4000 | E27  | 1050  | 1/10/50 |

## LED PAR20 7W



36°

**IP20**

**RA**  
≥80

**170-265**  
VAC

**2** Years  
Warranty




**25.000h**



| CODE      |          | WATT | CCT  | BASE | LUMEN |         |
|-----------|----------|------|------|------|-------|---------|
| LP20WE277 | <b>G</b> | 7    | 3000 | E27  | 560   | 1/10/50 |
| LP20CE277 | <b>G</b> | 7    | 4000 | E27  | 560   | 1/10/50 |

## LED PAR30 11W



36°

**IP20**

**RA**  
≥80

**170-265**  
VAC

**2** Years  
Warranty




**25.000h**



| CODE       |          | WATT | CCT  | BASE | LUMEN |         |
|------------|----------|------|------|------|-------|---------|
| LP30WE2711 | <b>F</b> | 11   | 3000 | E27  | 1000  | 1/10/50 |
| LP30CE2711 | <b>F</b> | 11   | 4000 | E27  | 1000  | 1/10/50 |

## LED PAR38 15W




36° 
 IP65 
 RA ≥80 
 180-260 VAC 
 3 Years Warranty 
 25.000h



| CODE       |  | WATT | CCT  | BASE | LUMEN |        |
|------------|--|------|------|------|-------|--------|
| LP38WE2715 |  | 15   | 3000 | E27  | 1100  | 1/5/20 |
| LP38CE2715 |  | 15   | 4000 | E27  | 1100  | 1/5/20 |
| LP38DE2715 |  | 15   | 6500 | E27  | 1100  | 1/5/20 |
| LP38YE2715 |  | 15   |      | E27  | -     | 1/5/20 |
| LP38GE2715 |  | 15   |      | E27  | -     | 1/5/20 |

## LED PAR38 12-42V AC/DC




36° 
 IP65 
 RA ≥80 
 12-24/42V AC/DC 
 3 Years Warranty 
 25.000h



| CODE             |  | WATT | CCT  | BASE | VOLT   | LUMEN |        |
|------------------|--|------|------|------|--------|-------|--------|
| LP38WE2715-12/24 |  | 15   | 3000 | E27  | 12-24V | 1180  | 1/5/20 |
| LP38WE2715-42    |  | 15   | 3000 | E27  | 42V    | 1180  | 1/5/20 |
| LP38GE2715-42    |  | 15   |      | E27  | 42V    | -     | 1/5/20 |

LED PAR56 18W

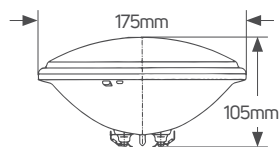

60°

IP68

RA  
≥70

12V  
AC/DC

PF>0,7

3 Years  
Warranty



50.000h




| CODE       |          | WATT | CCT  | BASE | LUMEN |     |
|------------|----------|------|------|------|-------|-----|
| LP56W18    | <b>G</b> | 18   | 3000 | GX53 | 1500  | 1/5 |
| LP56D18    | <b>F</b> | 18   | 6500 | GX53 | 1550  | 1/5 |
| LP56RGB18* | <b>F</b> | 18   | RGB  | GX53 | 1500  | 1/5 |

\* RGB remote control Included




## LED AR111 GU10 12W



24,45° 
 dimmable 
 RA ≥80 
 180-260 VAC 
 3 Years Warranty 
 25.000h

| CODE           |  | WATT | CCT  | BEAM ANGLE | BASE | LUMEN |        |
|----------------|--|------|------|------------|------|-------|--------|
| L111-GU10-24W  |  | 12   | 3000 | 24°        | GU10 | 710   | 1/5/20 |
| L111-GU10-24C  |  | 12   | 4000 | 24°        | GU10 | 710   | 1/5/20 |
| L111-GU10-45W  |  | 12   | 3000 | 45°        | GU10 | 710   | 1/5/20 |
| L111-GU10-45C  |  | 12   | 4000 | 45°        | GU10 | 710   | 1/5/20 |
| L111-GU10-24WD |  | 12   | 3000 | 24°        | GU10 | 710   | 1/5/20 |
| L111-GU10-45WD |  | 12   | 3000 | 45°        | GU10 | 710   | 1/5/20 |

## LED AR111 G53 12W




24,45° 
 RA ≥80 
 12V AC/DC 
 3 Years Warranty 
 25.000h

| CODE         |  | WATT | CCT  | BEAM ANGLE | BASE | LUMEN |        |
|--------------|--|------|------|------------|------|-------|--------|
| L111-G53-24W |  | 12   | 3000 | 24°        | G53  | 760   | 1/5/20 |
| L111-G53-24C |  | 12   | 4000 | 24°        | G53  | 760   | 1/5/20 |
| L111-G53-45W |  | 12   | 3000 | 45°        | G53  | 760   | 1/5/20 |
| L111-G53-45C |  | 12   | 4000 | 45°        | G53  | 760   | 1/5/20 |



LED Anti Insect



RA  
≥80


100-250  
VAC

2 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT | BASE |         |
|----------|---|------|-----|------|---------|
| LGLYE275 | F | 5    | ●   | E27  | 1/10/50 |

LED R7s 78mm 4.9W



RA  
≥80


220-240  
VAC

3 Years  
Warranty

15.000h

| CODE     |   | WATT | CCT  | BASE | LUMEN |          |
|----------|---|------|------|------|-------|----------|
| LR7-78WS | F | 4.9  | 3000 | R7s  | 450   | 1/10/200 |
| LR7-78DS | F | 4.9  | 6500 | R7s  | 500   | 1/10/200 |

LED R7s 118mm 9W

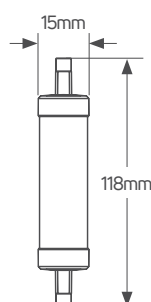

RA  
≥80

220-240  
VAC

3 Years  
Warranty


15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |         |
|-----------|---|------|------|------|-------|---------|
| LR7-118WS | F | 9    | 3000 | R7s  | 800   | 1/10/50 |
| LR7-118DS | F | 9    | 6500 | R7s  | 900   | 1/10/50 |



## LED **Street Lamps**

## A70 14W



**IP44**

**RA**  
≥80

**180-265**  
VAC

**PF>0,9**


**3** Years  
Warranty

**15.000h**



| CODE       |          | WATT | CCT  | BASE | LUMEN |         |
|------------|----------|------|------|------|-------|---------|
| LA70WE2714 | <b>F</b> | 14   | 2700 | E27  | 1500  | 1/10/50 |
| LA70CE2714 | <b>F</b> | 14   | 4000 | E27  | 1500  | 1/10/50 |
| LA70DE2714 | <b>F</b> | 14   | 6500 | E27  | 1500  | 1/10/50 |

## Tubular 15W



**IP65**

**RA**  
≥80

**180-260**  
VAC

**PF>0,9**

**3** Years  
Warranty

**25.000h**

**RG-0**




| CODE |          | WATT | CCT  | BASE | LUMEN |         |
|------|----------|------|------|------|-------|---------|
| LTUW | <b>F</b> | 15   | 3000 | E27  | 1500  | 1/10/50 |
| LTUC | <b>F</b> | 15   | 4000 | E27  | 1550  | 1/10/50 |
| LTUD | <b>F</b> | 15   | 6500 | E27  | 1600  | 1/10/50 |





## LED Tubes

## LED T8 ECO 0.6m



RA  
≥80


175-265  
VAC

2 Years  
Warranty

30.000h

| CODE       |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|------------|---|--------|------|------|------|-------|------|
| LHT8W60ECO | F | 600    | 9    | 3000 | G13  | 800   | 1/25 |
| LHT8C60ECO | F | 600    | 9    | 4000 | G13  | 800   | 1/25 |
| LHT8D60ECO | F | 600    | 9    | 6500 | G13  | 800   | 1/25 |

## LED T8 ECO 0.9m



RA  
≥80

175-265  
VAC

2 Years  
Warranty

30.000h

| CODE       |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|------------|---|--------|------|------|------|-------|------|
| LHT8W90ECO | F | 900    | 12   | 3000 | G13  | 1100  | 1/25 |
| LHT8C90ECO | F | 900    | 12   | 4000 | G13  | 1100  | 1/25 |
| LHT8D90ECO | F | 900    | 12   | 6500 | G13  | 1100  | 1/25 |

## LED T8 ECO 1.2m



RA  
≥80


175-265  
VAC

2 Years  
Warranty

30.000h

| CODE        |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|-------------|---|--------|------|------|------|-------|------|
| LHT8W120ECO | F | 1200   | 18   | 3000 | G13  | 1800  | 1/25 |
| LHT8C120ECO | F | 1200   | 18   | 4000 | G13  | 1800  | 1/25 |
| LHT8D120ECO | F | 1200   | 18   | 6500 | G13  | 1800  | 1/25 |

## LED T8 ECO 1.5m



RA  
≥80


175-265  
VAC

2 Years  
Warranty

30.000h


| CODE        |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|-------------|---|--------|------|------|------|-------|------|
| LHT8W150ECO | F | 1500   | 22   | 3000 | G13  | 2200  | 1/25 |
| LHT8C150ECO | F | 1500   | 22   | 4000 | G13  | 2200  | 1/25 |
| LHT8D150ECO | F | 1500   | 22   | 6500 | G13  | 2200  | 1/25 |

## Wiring Connection




Connect directly to main voltage at one end of each side of the T8 lamp

## LED T8 DS 0.6m

RA  
≥80160-265  
VAC2 Years  
Warranty


| CODE      | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|-----------|--------|------|------|------|-------|------|
| LHT8W60DS | 600    | 9    | 3000 | G13  | 900   | 1/25 |
| LHT8C60DS | 600    | 9    | 4000 | G13  | 900   | 1/25 |
| LHT8D60DS | 600    | 9    | 6500 | G13  | 900   | 1/25 |

## LED T8 DS 0.9m

RA  
≥80160-265  
VAC2 Years  
Warranty

| CODE      | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|-----------|--------|------|------|------|-------|------|
| LHT8W90DS | 900    | 15   | 3000 | G13  | 1500  | 1/25 |
| LHT8C90DS | 900    | 15   | 4000 | G13  | 1500  | 1/25 |
| LHT8D90DS | 900    | 15   | 6500 | G13  | 1500  | 1/25 |

## LED T8 DS 1.2m


RA  
≥80160-265  
VAC2 Years  
Warranty

| CODE       | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|------------|--------|------|------|------|-------|------|
| LHT8W120DS | 1200   | 18   | 3000 | G13  | 1900  | 1/25 |
| LHT8C120DS | 1200   | 18   | 4000 | G13  | 1900  | 1/25 |
| LHT8D120DS | 1200   | 18   | 6500 | G13  | 1900  | 1/25 |

## LED T8 DS 1.5m


RA  
≥80160-265  
VAC2 Years  
Warranty

| CODE       | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|------------|--------|------|------|------|-------|------|
| LHT8W150DS | 1500   | 22   | 3000 | G13  | 2200  | 1/25 |
| LHT8C150DS | 1500   | 22   | 4000 | G13  | 2200  | 1/25 |
| LHT8D150DS | 1500   | 22   | 6500 | G13  | 2200  | 1/25 |

Wiring  
Connection

Connect directly to main voltage  
at one end of each side of the T8 lamp

## LED T8 ST 0.6m Starter



RA  
≥80


85-265  
VAC

2 Years  
Warranty

30.000h

| CODE       |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|------------|---|--------|------|------|------|-------|------|
| LHT8W60ST2 | F | 600    | 9    | 3000 | G13  | 1000  | 1/25 |
| LHT8C60ST2 | F | 600    | 9    | 4000 | G13  | 1000  | 1/25 |
| LHT8D60ST2 | F | 600    | 9    | 6500 | G13  | 1000  | 1/25 |

## LED T8 ST 0.9m Starter



RA  
≥80

85-265  
VAC

2 Years  
Warranty

30.000h

| CODE       |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|------------|---|--------|------|------|------|-------|------|
| LHT8W90ST2 | F | 900    | 12   | 3000 | G13  | 1300  | 1/25 |
| LHT8C90ST2 | F | 900    | 12   | 4000 | G13  | 1300  | 1/25 |
| LHT8D90ST2 | F | 900    | 12   | 6500 | G13  | 1300  | 1/25 |

## LED T8 ST 1.2m Starter



RA  
≥80

85-265  
VAC

2 Years  
Warranty

30.000h

| CODE        |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|-------------|---|--------|------|------|------|-------|------|
| LHT8W120ST2 | F | 1200   | 18   | 3000 | G13  | 1900  | 1/25 |
| LHT8C120ST2 | F | 1200   | 18   | 4000 | G13  | 1900  | 1/25 |
| LHT8D120ST2 | F | 1200   | 18   | 6500 | G13  | 1900  | 1/25 |

## LED T8 ST 1.5m Starter



RA  
≥80

85-265  
VAC

2 Years  
Warranty


30.000h

| CODE        |   | LENGTH | WATT | CCT  | BASE | LUMEN |      |
|-------------|---|--------|------|------|------|-------|------|
| LHT8W150ST2 | F | 1500   | 22   | 3000 | G13  | 2300  | 1/25 |
| LHT8C150ST2 | F | 1500   | 22   | 4000 | G13  | 2300  | 1/25 |
| LHT8D150ST2 | F | 1500   | 22   | 6500 | G13  | 2300  | 1/25 |

## Wiring Connection




### 3 installation options





## LED T8 ST Meat



RA  
≥80

85-265  
VAC

2 Years  
Warranty

-20 | +50 °C

30.000h




| CODE       | LENGTH (A) | WATT | CCT  | BASE | LUMEN |      |
|------------|------------|------|------|------|-------|------|
| LHT8M60ST  | 600        | 9    | 3500 | G13  | 700   | 1/25 |
| LHT8M90ST  | 900        | 12   | 3500 | G13  | 1200  | 1/25 |
| LHT8M120ST | 1200       | 18   | 3500 | G13  | 1900  | 1/25 |
| LHT8M150ST | 1500       | 22   | 3500 | G13  | 2400  | 1/25 |

## Wiring Connection



## 3 installation options





## LED T8 ST Bread

RA  
≥8085-265  
VAC2 Years  
Warranty

-20 | +50 °C


30.000h



| CODE       | LENGTH (A) | WATT | CCT  | BASE | LUMEN |      |
|------------|------------|------|------|------|-------|------|
| LHT8B60ST  | 600        | 9    | 2200 | G13  | 800   | 1/25 |
| LHT8B90ST  | 900        | 12   | 2200 | G13  | 1300  | 1/25 |
| LHT8B120ST | 1200       | 18   | 2200 | G13  | 1700  | 1/25 |
| LHT8B150ST | 1500       | 21   | 2200 | G13  | 2100  | 1/25 |

Wiring  
Connection

## 3 installation options







## LED T8 ST Vegetables



RA  
≥80



**2** Years  
Warranty




| CODE       | LENGTH (A) | WATT | CCT  | BASE | LUMEN |      |
|------------|------------|------|------|------|-------|------|
| LHT8V60ST  | 600        | 9    | 5500 | G13  | 850   | 1/25 |
| LHT8V120ST | 1200       | 18   | 5500 | G13  | 2100  | 1/25 |
| LHT8V150ST | 1500       | 21   | 5500 | G13  | 2550  | 1/25 |


## Wiring Connection



## 3 installation options



## LED T9 Circle




180°

RA  
≥803 Years  
Warranty

25.000h




| CODE    |   | WATT | CCT  | BASE | LUMEN | DIMENSIONS |    |      |
|---------|---|------|------|------|-------|------------|----|------|
|         |   |      |      |      |       | A          | B  |      |
| LT9-22D | F | 11   | 6500 | G10Q | 1100  | 215        | 30 | 1/10 |
| LT9-32D | F | 16.5 | 6500 | G10Q | 1700  | 300        | 30 | 1/10 |
| LT9-40D | F | 24   | 6500 | G10Q | 2500  | 400        | 30 | 1/10 |

Wiring  
Connection

## Option A


Remove only the starter and  
keep the magnetic ballast



## Option B

Direct connect to 220V using the  
plug (included in the package)

## LED Linestra 5W

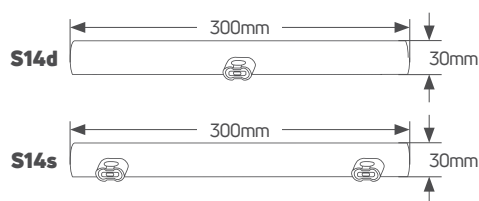

270°

RA  
≥80220-240  
VAC2 Years  
Warranty


15.000h



| CODE      |   | WATT | CCT  | BASE | LUMEN |      |
|-----------|---|------|------|------|-------|------|
| LIN-30W-1 | F | 5    | 3000 | S14d | 500   | 1/25 |
| LIN-30W-2 | F | 5    | 3000 | S14s | 500   | 1/25 |



## LED Linestra 8W

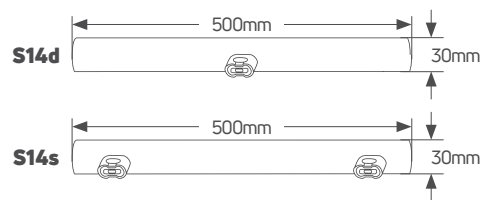


270°

RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h

| CODE      |   | WATT | CCT  | BASE | LUMEN |      |
|-----------|---|------|------|------|-------|------|
| LIN-50W-1 | F | 8    | 3000 | S14d | 750   | 1/25 |
| LIN-50W-2 | F | 8    | 3000 | S14s | 750   | 1/25 |

## LED Linestra 15W



270°

RA  
≥80220-240  
VAC2 Years  
Warranty

15.000h

| CODE       |   | WATT | CCT  | BASE | LUMEN |      |
|------------|---|------|------|------|-------|------|
| LIN-100W-2 | F | 15   | 3000 | S14s | 1500  | 1/25 |



## Halogen **Lamps**



## LED Anti Insect



| CODE      | WATT | CCT  | BASE | LUMEN |          |
|-----------|------|------|------|-------|----------|
| FACL2728  | 28   | 2700 | E27  | 369   | 1/10/100 |
| FACL2742  | 42   | 2700 | E27  | 623   | 1/10/100 |
| FACL2753  | 53   | 2700 | E27  | 834   | 1/10/100 |
| FACL2770  | 70   | 2700 | E27  | 1180  | 1/10/100 |
| FACL27100 | 100  | 2700 | E27  | 1791  | 1/10/100 |



## Classic B2



| CODE     | WATT | CCT  | BASE | LUMEN |          |
|----------|------|------|------|-------|----------|
| FBCL2228 | 28   | 2700 | B22  | 369   | 1/10/100 |
| FBCL2242 | 42   | 2700 | B22  | 623   | 1/10/100 |
| FBCL2253 | 53   | 2700 | B22  | 834   | 1/10/100 |
| FBCL2270 | 70   | 2700 | B22  | 1180  | 1/10/100 |



## Candle



| CODE     | WATT | CCT  | BASE | LUMEN |          |
|----------|------|------|------|-------|----------|
| FCCL1418 | 18   | 2700 | E14  | 209   | 1/10/100 |
| FCCL1428 | 28   | 2700 | E14  | 369   | 1/10/100 |
| FCCL1442 | 42   | 2700 | E14  | 623   | 1/10/100 |



Candle Flame

360° dimmable 230 VAC 2.000h

| CODE       | WATT | CCT  | BASE | LUMEN |          |
|------------|------|------|------|-------|----------|
| FCCL1442FL | 42   | 2700 | E14  | 630   | 1/10/100 |



Mini Globe E14

360° dimmable 230 VAC 2.000h

| CODE     | WATT | CCT  | BASE | LUMEN |          |
|----------|------|------|------|-------|----------|
| FGCL1418 | 18   | 2700 | E14  | 209   | 1/10/100 |
| FGCL1428 | 28   | 2700 | E14  | 369   | 1/10/100 |
| FGCL1442 | 42   | 2700 | E14  | 623   | 1/10/100 |



Mini Globe E27

360° dimmable 230 VAC 2.000h

| CODE     | WATT | CCT  | BASE | LUMEN |          |
|----------|------|------|------|-------|----------|
| FGCL2718 | 18   | 2700 | E27  | 209   | 1/10/100 |
| FGCL2728 | 28   | 2700 | E27  | 369   | 1/10/100 |
| FGCL2742 | 42   | 2700 | E27  | 623   | 1/10/100 |



Globe G125

360° dimmable 230 VAC 2.000h

| CODE    | WATT | CCT  | BASE | LUMEN |      |
|---------|------|------|------|-------|------|
| FG12570 | 70   | 2700 | E27  | 1180  | 1/50 |



GU10 Spot



38°



dimmable



230 VAC



2.000h

| CODE  | WATT | CCT  | BASE | LUMEN |          |
|-------|------|------|------|-------|----------|
| FHG28 | 28   | 2700 | GU10 | 370   | 1/10/100 |
| FHG42 | 42   | 2700 | GU10 | 630   | 1/10/100 |



MR11 Spot



38°



dimmable



12 VAC



2.000h

| CODE    | WATT | CCT  | BASE | LUMEN |          |
|---------|------|------|------|-------|----------|
| FHMG416 | 16   | 2700 | GU4  | 170   | 1/10/100 |
| FHMG428 | 28   | 2700 | GU4  | 370   | 1/10/100 |



MR16 Spot



38°



dimmable



12 VAC



2.000h

| CODE  | WATT | CCT  | BASE  | LUMEN |          |
|-------|------|------|-------|-------|----------|
| FHM16 | 16   | 2700 | GU5.3 | 170   | 1/10/100 |
| FHM28 | 28   | 2700 | GU5.3 | 237   | 1/10/100 |
| FHM40 | 40   | 2700 | GU5.3 | 630   | 1/10/100 |

## G4



| CODE      | WATT | CCT  | BASE   | LUMEN |            |
|-----------|------|------|--------|-------|------------|
| FG416     | 16   | 2700 | G4     | 188   | 1/100/1000 |
| FG428     | 28   | 2700 | G4     | 370   | 1/100/1000 |
| FGY6.3540 | 40   | 2700 | GY6.35 | 630   | 1/100/1000 |

## G9



| CODE  | WATT | CCT  | BASE | LUMEN |            |
|-------|------|------|------|-------|------------|
| FG918 | 18   | 2700 | G9   | 209   | 1/100/1000 |
| FG928 | 28   | 2700 | G9   | 370   | 1/100/1000 |
| FG942 | 42   | 2700 | G9   | 623   | 1/100/1000 |



R50



| CODE   | WATT | CCT  | BASE | LUMEN |          |
|--------|------|------|------|-------|----------|
| FK1428 | 28   | 2700 | E14  | 219   | 1/10/100 |
| FK1442 | 42   | 2700 | E14  | 623   | 1/10/100 |



R63



| CODE   | WATT | CCT  | BASE | LUMEN |          |
|--------|------|------|------|-------|----------|
| FK2728 | 28   | 2700 | E27  | 219   | 1/10/100 |
| FK2742 | 42   | 2700 | E27  | 375   | 1/10/100 |
| FK2753 | 53   | 2700 | E27  | 505   | 1/10/100 |



R80



| CODE     | WATT | CCT  | BASE | LUMEN |        |
|----------|------|------|------|-------|--------|
| F80K2770 | 70   | 2700 | E27  | 1180  | 1/5/50 |





R7s 78mm



| CODE     | WATT | CCT  | BASE | LUMEN |          |
|----------|------|------|------|-------|----------|
| FR77880  | 80   | 2700 | R7s  | 1380  | 1/50/500 |
| FR778120 | 120  | 2700 | R7s  | 2200  | 1/50/500 |



R7s 118mm



| CODE      | WATT | CCT  | BASE | LUMEN |          |
|-----------|------|------|------|-------|----------|
| FR7118160 | 160  | 2700 | R7s  | 3100  | 1/50/500 |
| FR7118230 | 230  | 2700 | R7s  | 4700  | 1/50/500 |
| FR7118400 | 400  | 2700 | R7s  | 8550  | 1/50/500 |



T22 Oven Lamp



| CODE | WATT | CCT  | BASE | LUMEN |          |
|------|------|------|------|-------|----------|
| HOL  | 15   | 2700 | E14  | 88    | 1/10/500 |



## Conversion **Lamp Holders**



| CODE     | DESCRIPTION |      |
|----------|-------------|------|
| ADE27E14 | E27 to E14  | 1/20 |



| CODE     | DESCRIPTION |      |
|----------|-------------|------|
| ADE27E27 | E27 to E27  | 1/20 |



| CODE      | DESCRIPTION  |      |
|-----------|--------------|------|
| ADE272E27 | E27 to 2xE27 | 1/20 |



| CODE      | DESCRIPTION |      |
|-----------|-------------|------|
| ADE27GU10 | E27 to GU10 | 1/20 |



| CODE     | DESCRIPTION |      |
|----------|-------------|------|
| ADE14E27 | E14 to E27  | 1/20 |



| CODE      | DESCRIPTION |      |
|-----------|-------------|------|
| ADE14GU10 | E14 to GU10 | 1/20 |



| CODE     | DESCRIPTION |      |
|----------|-------------|------|
| ADE40E27 | E40 to E27  | 1/20 |



| CODE     | DESCRIPTION |      |
|----------|-------------|------|
| ADB22E27 | B22 to E27  | 1/20 |



| CODE      | DESCRIPTION |      |
|-----------|-------------|------|
| ADGU10E27 | GU10 to E27 | 1/20 |



| CODE    | DESCRIPTION |      |
|---------|-------------|------|
| ADG9E14 | G9 to E14   | 1/20 |



## Fluorescent **Lamps**



## T8 Lamp 18W

360° 12.000h

| CODE    | WATT | CCT  | BASE | LUMEN |      |
|---------|------|------|------|-------|------|
| HT8CW60 | 18   | 4000 | G13  | 1110  | 1/25 |
| HT8CE60 | 18   | 6500 | G13  | 960   | 1/25 |



## T8 Lamp 30W

360° 12.000h

| CODE    | WATT | CCT  | BASE | LUMEN |      |
|---------|------|------|------|-------|------|
| HT8CW90 | 30   | 4000 | G13  | 2020  | 1/25 |
| HT8CE90 | 30   | 6500 | G13  | 1720  | 1/25 |



## T8 Lamp 36W

360° 12.000h

| CODE     | WATT | CCT  | BASE | LUMEN |      |
|----------|------|------|------|-------|------|
| HT8CW120 | 36   | 4000 | G13  | 2650  | 1/25 |
| HT8CE120 | 36   | 6500 | G13  | 2400  | 1/25 |



## T8 Lamp 58W

360° 12.000h

| CODE     | WATT | CCT  | BASE | LUMEN |      |
|----------|------|------|------|-------|------|
| HT8CW150 | 58   | 4000 | G13  | 4780  | 1/25 |
| HT8CE150 | 58   | 6500 | G13  | 4080  | 1/25 |

## T9 CIRCLE Lamp

360° 8.000h



| CODE    | WATT | CCT  | BASE | LUMEN |      |
|---------|------|------|------|-------|------|
| HLCCR22 | 22   | 6500 | G10Q | 1050  | 1/20 |
| HLCCR32 | 32   | 6500 | G10Q | 1700  | 1/10 |
| HLCCR40 | 40   | 6500 | G10Q | 2500  | 1/10 |

## T8, T9 Starter




| CODE  | WATT |      |
|-------|------|------|
| FST2  | 4-22 | 1/25 |
| FST10 | 4-65 | 1/25 |





## Fluorescent **UV-A Lamps**

T5 UV-A Lamp BL 365 4W




| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5UVA4 | 4    | G5   | 365 | 1/25 |

T5 UV-A Lamp BL 365 6W




| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5UVA6 | 6    | G5   | 365 | 1/25 |

T5 UV-A Lamp BL 365 8W




| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5UVA8 | 8    | G5   | 365 | 1/25 |

T5 UV-A Lamp BL 365 13W



| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT5UVA13 | 13   | G5   | 365 | 1/25 |

## T8 UV-A Lamp BL 365 10W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVA10 | 10   | G13  | 365 | 1/25 |

## T8 UV-A Lamp BL 365 15W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVA15 | 15   | G13  | 365 | 1/25 |

## T8 UV-A Lamp BL 365 18W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVA18 | 18   | G13  | 365 | 1/25 |

## T8 UV-A Lamp BL 365 30W



| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVA30 | 30   | G13  | 365 | 1/25 |

## T8 UV-A Lamp BL 365 36W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVA36 | 36   | G13  | 365 | 1/25 |



## Fluorescent **Blacklight Lamps**




T5 BLB Blacklight Lamp 4W



| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5BLB4 | 4    | G5   | 365 | 1/25 |




T5 BLB Blacklight Lamp 6W



| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5BLB6 | 6    | G5   | 365 | 1/25 |



T5 BLB Blacklight Lamp 8W



| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5BLB8 | 8    | G5   | 365 | 1/25 |




T5 BLB Blacklight Lamp 13W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT5BLB13 | 13   | G5   | 365 | 1/25 |

T8 BLB Blacklight Lamp 10W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8BLB10 | 10   | G13  | 365 | 1/25 |

T8 BLB Blacklight Lamp 15W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8BLB15 | 15   | G13  | 365 | 1/25 |

T8 BLB Blacklight Lamp 18W



| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8BLB18 | 18   | G13  | 365 | 1/25 |

T8 BLB Blacklight Lamp 36W



| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8BLB36 | 36   | G13  | 365 | 1/25 |





## Fluorescent **Germicidal UV-C Lamps**




## T5 UV-C Germicidal Lamp 6W



| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5UVC6 | 6    | G5   | 254 | 1/25 |




## T5 UV-C Germicidal Lamp 8W



| CODE    | WATT | BASE | Nm  |      |
|---------|------|------|-----|------|
| HT5UVC8 | 8    | G5   | 254 | 1/25 |




## T8 UV-C Germicidal Lamp 15W



| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVC15 | 15   | G13  | 254 | 1/25 |




## T8 UV-C Germicidal Lamp 18W




| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVC18 | 18   | G13  | 254 | 1/25 |

## T8 UV-C Germicidal Lamp 30W



| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVC30 | 30   | G13  | 254 | 1/25 |

## T8 UV-C Germicidal Lamp 36W



| CODE     | WATT | BASE | Nm  |      |
|----------|------|------|-----|------|
| HT8UVC36 | 36   | G13  | 254 | 1/25 |



## High **Pressure** Lamps



## Metal Halide MHL-E

360° 210-240 VAC 10.000h

| CODE        | TYPE       | WATT | CCT  | BASE | LUMEN |      |
|-------------|------------|------|------|------|-------|------|
| MHLE.060.40 | M.H.L 70W  | 70   | 4000 | E27  | 5800  | 1/40 |
| MHLE.130.40 | M.H.L 150W | 150  | 4000 | E27  | 13000 | 1/40 |
| MHLE.220.40 | M.H.L 250W | 250  | 4000 | E40  | 22000 | 1/20 |
| MHLE.420.40 | M.H.L 400W | 400  | 4000 | E40  | 42000 | 1/10 |



## Metal Halide MHL-T

360° 210-240 VAC 10.000h

| CODE           | TYPE        | WATT | CCT  | BASE | LUMEN  |      |
|----------------|-------------|------|------|------|--------|------|
| MHLT.060.40    | M.H.L 70W   | 70   | 4000 | E27  | 5800   | 1/40 |
| MHLT.130.40    | M.H.L 150W  | 150  | 4000 | E27  | 13000  | 1/40 |
| MHLT.130.40.E4 | M.H.L 150W  | 150  | 4000 | E40  | 13000  | 1/40 |
| MHLT.220.40    | M.H.L 250W  | 250  | 4000 | E40  | 22000  | 1/40 |
| MHLT.420.40    | M.H.L 400W  | 400  | 4000 | E40  | 42000  | 1/40 |
| MHLT.1100.40   | M.H.L 1000W | 1000 | 4000 | E40  | 110000 | 1/40 |



## Metal Halide RX7s

360° 210-240 VAC 10.000h

| CODE          | TYPE       | WATT | CCT  | BASE | LUMEN |        |
|---------------|------------|------|------|------|-------|--------|
| MHLRX7.70.30  | M.H.L 70W  | 70   | 3000 | RX7  | 6000  | 10/100 |
| MHLRX7.70.40  | M.H.L 150W | 70   | 4200 | RX7  | 6000  | 10/100 |
| MHLRX7.150.30 | M.H.L 250W | 150  | 3000 | RX7  | 13000 | 10/100 |
| MHLRX7.150.40 | M.H.L 400W | 150  | 4200 | RX7  | 13000 | 10/100 |

## High Pressure Sodium HPS-E

 360°
  210-240 VAC
  24.000h



| CODE         | TYPE         | WATT | CCT  | BASE | LUMEN |      |
|--------------|--------------|------|------|------|-------|------|
| HPS.E.060.20 | H.P.S.L 70W  | 70   | 2000 | E27  | 6000  | 1/40 |
| HPS.E.155.20 | H.P.S.L 150W | 150  | 2000 | E40  | 15600 | 1/20 |
| HPS.E.270.20 | H.P.S.L 250W | 250  | 2000 | E40  | 27000 | 1/20 |
| HPS.E.480.20 | H.P.S.L 400W | 400  | 2000 | E40  | 48000 | 1/10 |

## High Pressure Sodium HPS-T

 360°
  210-240 VAC
  24.000h



| CODE         | TYPE         | WATT | CCT  | BASE | LUMEN |      |
|--------------|--------------|------|------|------|-------|------|
| HPS.T.060.20 | H.P.S.L 70W  | 70   | 2000 | E27  | 6000  | 1/40 |
| HPS.T.155.20 | H.P.S.L 150W | 150  | 2000 | E40  | 15600 | 1/40 |
| HPS.T.270.20 | H.P.S.L 250W | 250  | 2000 | E40  | 27000 | 1/40 |
| HPS.T.480.20 | H.P.S.L 400W | 400  | 2000 | E40  | 48000 | 1/40 |

## CHAPTER B

# Architectural Illumination




## Down**Lights**



**3** Years  
Warranty

4W

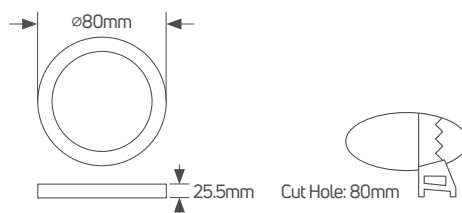


180° IP20 RA ≥80 PF>0,5

PMMA -20|+40 °C 30.000h



| CODE    | WATT | CCT  | LUMEN |      |
|---------|------|------|-------|------|
| LPL4WS3 | 4    | 3000 | 260   | 1/90 |
| LPL4CS3 | 4    | 4000 | 260   | 1/90 |
| LPL4DS3 | 4    | 6500 | 260   | 1/90 |

20W

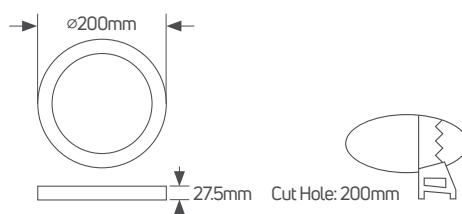

180° IP20 RA ≥80 PF>0,5


PMMA -20|+40 °C 30.000h



| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| LPL20WS3 | 20   | 3000 | 1900  | 1/30 |
| LPL20CS3 | 20   | 4000 | 1900  | 1/30 |
| LPL20DS3 | 20   | 6500 | 1900  | 1/30 |

**3** Years  
Warranty

24W

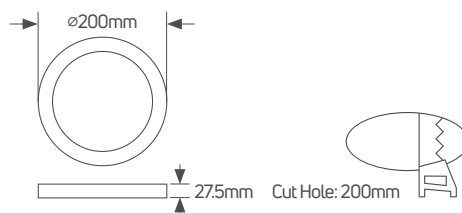

180°

**IP20**

**RA**  
≥80

**PF**>0,5

**PMMA**

-20 | +40 °C

**30.000h**




| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| LPL24WS3 | 24   | 3000 | 2300  | 1/30 |
| LPL24CS3 | 24   | 4000 | 2300  | 1/30 |
| LPL24DS3 | 24   | 6500 | 2300  | 1/30 |

**3** Years  
Warranty

**dimable**

20W Triac Dimmable

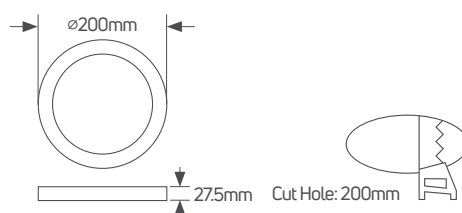

180°

**IP20**

**RA**  
≥80

**PF**>0,5

**PMMA**

-20 | +40 °C

**30.000h**




| CODE      | WATT | CCT  | LUMEN |      |
|-----------|------|------|-------|------|
| LPL20WS3D | 20   | 3000 | 1500  | 1/30 |
| LPL20CS3D | 20   | 4000 | 1500  | 1/30 |

**3** Years  
Warranty



3W

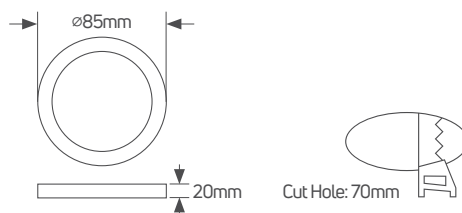

180° IP20 RA ≥80 PF>0,5


PMMA -20 | +40 °C 20.000h

| CODE   | WATT | CCT  | LUMEN |      |
|--------|------|------|-------|------|
| LPLW3S | 3    | 3000 | 180   | 1/40 |
| LPLC3S | 3    | 4000 | 180   | 1/40 |
| LPLD3S | 3    | 6500 | 180   | 1/40 |

**3** Years  
Warranty



6W

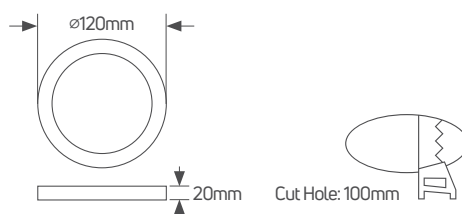

180° IP20 RA ≥80 PF>0,5


PMMA -20 | +40 °C 20.000h

| CODE   | WATT | CCT  | LUMEN |      |
|--------|------|------|-------|------|
| LPLW6S | 6    | 3000 | 380   | 1/40 |
| LPLC6S | 6    | 4000 | 380   | 1/40 |
| LPLD6S | 6    | 6500 | 380   | 1/40 |

**3** Years  
Warranty



9W

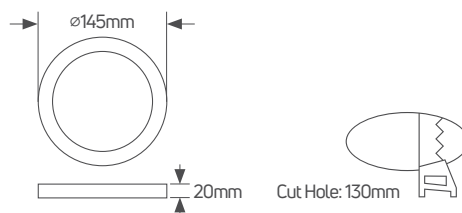

180° **IP20** **RA** ≥80 **PF** >0,5


**PMMA** -20 | +40 °C **20.000h**

| CODE   | WATT | CCT  | LUMEN |      |
|--------|------|------|-------|------|
| LPLW9S | 9    | 3000 | 650   | 1/40 |
| LPLC9S | 9    | 4000 | 650   | 1/40 |
| LPLD9S | 9    | 6500 | 650   | 1/40 |

**3** Years  
Warranty



12W

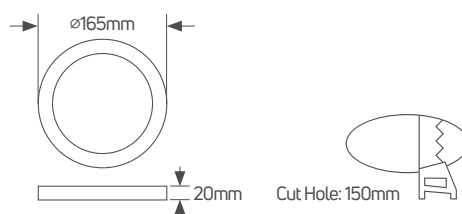

180° **IP20** **RA** ≥80 **PF** >0,5


**PMMA** -20 | +40 °C **20.000h**

| CODE    | WATT | CCT  | LUMEN |      |
|---------|------|------|-------|------|
| LPLW12S | 12   | 3000 | 900   | 1/20 |
| LPLC12S | 12   | 4000 | 900   | 1/20 |
| LPLD12S | 12   | 6500 | 900   | 1/20 |


**3** Years Warranty



18W



Cut Hole: 200mm



180°

**IP20**

**RA**  
≥80

**PF**>0,5

**PMMA**

-20 | +40 °C


**20.000h**

| CODE    |   | WATT | CCT  | LUMEN |      |
|---------|---|------|------|-------|------|
| LPLW18S | ○ | 18   | 3000 | 1550  | 1/20 |
| LPLC18S | ○ | 18   | 4000 | 1550  | 1/20 |
| LPLD18S | ○ | 18   | 6500 | 1550  | 1/20 |
| LPLW18G | ● | 18   | 3000 | 1550  | 1/20 |
| LPLC18G | ● | 18   | 4000 | 1550  | 1/20 |
| LPLD18G | ● | 18   | 6500 | 1550  | 1/20 |

**3** Years Warranty



18W



Cut Hole: 200x200mm



180°

**IP20**

**RA**  
≥80

**PF**>0,5

**PMMA**

-20 | +40 °C


**20.000h**

| CODE     |  | WATT | CCT  | LUMEN |      |
|----------|--|------|------|-------|------|
| LPLW18TS |  | 18   | 3000 | 1550  | 1/20 |
| LPLC18TS |  | 18   | 4000 | 1550  | 1/20 |
| LPLD18TS |  | 18   | 6500 | 1550  | 1/20 |

**3** Years Warranty



24W



Cut Hole: 200mm



180°

**IP20**

**RA**  
≥80

**PF**>0,9


**PMMA**

-20 | +40 °C


**20.000h**

| CODE    |   | WATT | CCT  | LUMEN |      |
|---------|---|------|------|-------|------|
| LPLW24S | F | 24   | 3000 | 2100  | 1/20 |
| LPLC24S | F | 24   | 4000 | 2100  | 1/20 |
| LPLD24S | F | 24   | 6500 | 2100  | 1/20 |

**3** Years  
Warranty



24W

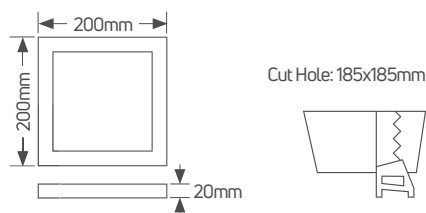

180° **IP20** **RA** ≥80 **PF** >0,5


**PMMA** -20 | +40 °C **30.000h**

| CODE      | WATT | CCT  | LUMEN |      |
|-----------|------|------|-------|------|
| LPLW24TS3 | 24   | 3000 | 2090  | 1/20 |
| LPLC24TS3 | 24   | 4000 | 2090  | 1/20 |
| LPLD24TS3 | 24   | 6500 | 2090  | 1/20 |

**3** Years  
Warranty



20W




180° **IP20** **RA** ≥80 **PF** >0,5


**PMMA** -20 | +40 °C **30.000h**

| CODE      | WATT | CCT  | LUMEN |      |
|-----------|------|------|-------|------|
| LPLAW20S3 | 20   | 3000 | 1900  | 1/20 |
| LPLAC20S3 | 20   | 4000 | 1900  | 1/20 |
| LPLAD20S3 | 20   | 6500 | 1900  | 1/20 |

**3** Years  
Warranty



20W



180° **IP20** **RA** ≥80 **PF** >0,5


**PMMA** -20 | +40 °C **30.000h**

| CODE       | WATT | CCT  | LUMEN |      |
|------------|------|------|-------|------|
| LPLAW20TS3 | 20   | 3000 | 1710  | 1/20 |
| LPLAC20TS3 | 20   | 4000 | 1710  | 1/20 |
| LPLAD20TS3 | 20   | 6500 | 1710  | 1/20 |

# Surface mounted downlights

**GEYER**


**3** Years Warranty



180° **IP20** **RA** ≥80 **PF**>0,5 **-20** | **+40** °C **20.000h**

| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| LPLAW18S | 18   | 3000 | 1550  | 1/20 |
| LPLAC18S | 18   | 4000 | 1550  | 1/20 |
| LPLAD18S | 18   | 6500 | 1550  | 1/20 |


**3** Years Warranty



180° **IP20** **RA** ≥80 **PF**>0,9 **-20** | **+40** °C **20.000h**

| CODE      | WATT | CCT  | LUMEN |      |
|-----------|------|------|-------|------|
| LPLAW18TS | 18   | 3000 | 1550  | 1/20 |
| LPLAC18TS | 18   | 4000 | 1550  | 1/20 |
| LPLAD18TS | 18   | 6500 | 1550  | 1/20 |

**3** Years Warranty




120° **IP40** **CRI** >80 **CLASS I**  
**100-277** VAC **PF**>0,9 **-20** | **+45** °C **40.000h**

| CODE      | WATT | CCT  | LUMEN | DIMENSIONS (mm) |    |      |
|-----------|------|------|-------|-----------------|----|------|
|           |      |      |       | A               | B  |      |
| LCBW3025W | 25   | 3000 | 1850  | 298             | 51 | 1/20 |
| LCBW4035W | 35   | 3000 | 2920  | 400             | 68 | 1/20 |



**5** Years  
Warranty

**IP65**

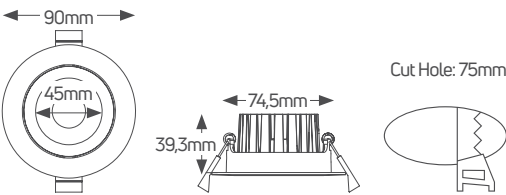


60°  
**CRI** >80  
**CLASS II**  
200-240 VAC  
PF>0,9  
-20 | +45 °C  
40.000h

| CODE        | WATT | CCT  | LUMEN |      |
|-------------|------|------|-------|------|
| LDLW751060W | 10   | 3000 | 870   | 1/50 |
| LDLC751060W | 10   | 4000 | 1000  | 1/50 |




**5** Years Warranty

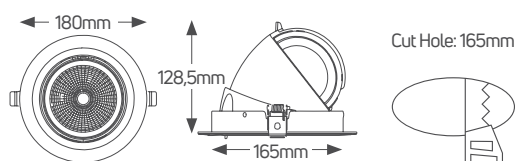

60°  
CRI >80  
CLASS II  
200-240 VAC  
PF>0,9  
-20 | +45 °C  
40.000h

| CODE          | WATT | CCT  | LUMEN |      |
|---------------|------|------|-------|------|
| LDLW16535S60W | 35   | 3000 | 3570  | 1/12 |
| LDLC16535S60W | 35   | 4000 | 3800  | 1/12 |


**5** Years Warranty

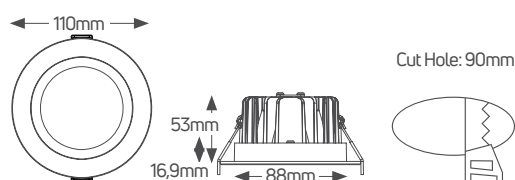

60°  
CRI >80  
CLASS II  
200-240 VAC  
PF>0,9  
-20 | +45 °C  
40.000h

| CODE        | WATT | CCT  | LUMEN |      |
|-------------|------|------|-------|------|
| LDLW901360W | 13   | 3000 | 1040  | 1/30 |
| LDLC901360W | 13   | 4000 | 1090  | 1/30 |

**5** Years  
Warranty

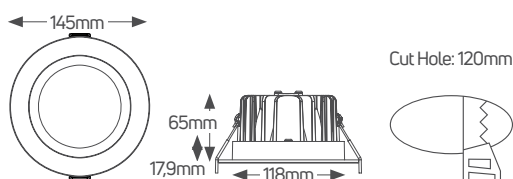

**CRI**  
>80

**CLASS II**

**200-240**  
VAC


**PF**>0,9

**-20 | +45 °C**

**40.000h**

| CODE         | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|--------------|------|------------|------|-------|------|
| LDLW1201824W | 18   | 24         | 3000 | 1980  | 1/12 |
| LDLW1201845W | 18   | 45         | 3000 | 1980  | 1/12 |
| LDLW1201860W | 18   | 60         | 3000 | 1980  | 1/12 |
| LDLC1201824W | 18   | 24         | 4000 | 2070  | 1/12 |
| LDLC1201845W | 18   | 45         | 4000 | 2070  | 1/12 |
| LDLC1201860W | 18   | 60         | 4000 | 2070  | 1/12 |

**5** Years  
Warranty

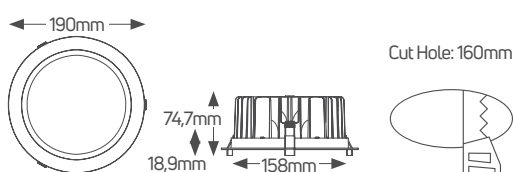

**CRI**  
>80

**CLASS II**

**200-240**  
VAC


**PF**>0,9

**-20 | +45 °C**

**40.000h**

| CODE         | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|--------------|------|------------|------|-------|------|
| LDLW1602536W | 25   | 36         | 3000 | 2700  | 1/12 |
| LDLW1602560W | 25   | 60         | 3000 | 2700  | 1/12 |
| LDLC1602536W | 25   | 36         | 4000 | 2825  | 1/12 |
| LDLC1602560W | 25   | 60         | 4000 | 2825  | 1/12 |


**5** Years Warranty

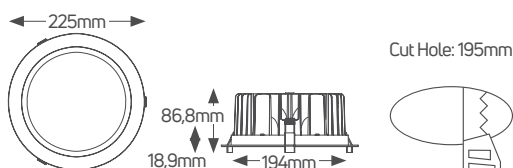

**CRI** >80 **CLASS II** ⚡ 200-240 VAC  
**PF** >0,9 **-20 | +45 °C** ⌚ 40.000h

| CODE         | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|--------------|------|------------|------|-------|------|
| LDLW2003524W | 35   | 24         | 3000 | 3605  | 1/12 |
| LDLW2003536W | 35   | 36         | 3000 | 3605  | 1/12 |
| LDLW2003560W | 35   | 60         | 3000 | 3605  | 1/12 |
| LDLC2003524W | 35   | 24         | 4000 | 3885  | 1/12 |
| LDLC2003536W | 35   | 36         | 4000 | 3885  | 1/12 |
| LDLC2003560W | 35   | 60         | 4000 | 3885  | 1/12 |

**5** Years Warranty

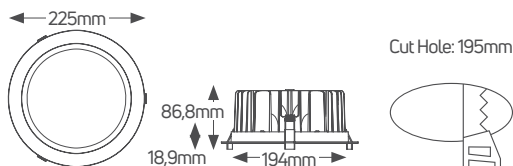

**CRI** >80 **CLASS II** ⚡ 200-240 VAC  
**PF** >0,9 **-20 | +45 °C** ⌚ 40.000h

| CODE         | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|--------------|------|------------|------|-------|------|
| LDLW2004524W | 45   | 24         | 3000 | 4410  | 1/12 |
| LDLW2004536W | 45   | 36         | 3000 | 4410  | 1/12 |
| LDLW2004560W | 45   | 60         | 3000 | 4410  | 1/12 |
| LDLC2004524W | 45   | 24         | 4000 | 4725  | 1/12 |
| LDLC2004536W | 45   | 36         | 4000 | 4725  | 1/12 |
| LDLC2004560W | 45   | 60         | 4000 | 4725  | 1/12 |




## LED Panels

**3** Years  
Warranty



## Panel Sandwich 60x60



110°

**IP20**

**RA**  
≥80

**PF**>0,9


**PMMA**

**-20 | +40 °C**

**25.000h**

| CODE     | WATT                               | CCT  | LUMEN |       |
|----------|------------------------------------|------|-------|-------|
| LP40UW   | 40                                 | 3000 | 2950  | 1/4   |
| LP40UC   | 40                                 | 4000 | 3150  | 1/4   |
| LP40UD   | 40                                 | 6500 | 3150  | 1/4   |
| EMDRLP40 | LED emergency driver for panel 40W |      |       | 1/100 |

## Panel Eco 60x60



110°

**IP20**

**RA**  
≥80

**PF**>0,9

**PMMA**

**TUV**  
SUD

**-20 | +40 °C**

**40.000h**

**3** Years  
Warranty




| CODE     |                                    | WATT | CCT  | LUMEN |       |
|----------|------------------------------------|------|------|-------|-------|
| LP40BLW  | <b>F</b>                           | 40   | 3000 | 4000  | 1/6   |
| LP40BLC  | <b>F</b>                           | 40   | 4000 | 4000  | 1/6   |
| LP40BLD  | <b>F</b>                           | 40   | 6500 | 4000  | 1/6   |
| EMDRLP40 | LED emergency driver for panel 40W |      |      |       | 1/100 |
| LP60FR   | Surface frame                      |      |      |       | 1/20  |
| LP40-K   | Hanging tool 2.5m                  |      |      |       | 1/100 |
| LP40-SP4 | Kit for plasterboard 4 pcs.        |      |      |       | 1/100 |

**5** Years Warranty



## Panel Slim 60x60




110° IP20 RA ≥80 PF>0,9 PMMA -20|+40°C 50.000h

| CODE         |          | WATT                               | CCT  | LUMEN |       |
|--------------|----------|------------------------------------|------|-------|-------|
| LP40W5       | <b>E</b> | 40                                 | 3000 | 5000  | 1/5   |
| LP40C5       | <b>E</b> | 40                                 | 4000 | 5000  | 1/5   |
| LP40D5       | <b>E</b> | 40                                 | 6500 | 5000  | 1/5   |
| EMDRLP40     |          | LED emergency driver for panel 40W |      |       | 1/100 |
| LF-GDE042YF  |          | Driver 0-10V Lifud                 |      |       | 1/1   |
| LF-GDE042YFS |          | Driver Dali Lifud                  |      |       | 1/16  |
| LP60-ARW     |          | Surface frame                      |      |       | 1/20  |
| LP40-K       |          | Hanging tool 2.5m                  |      |       | 1/100 |
| LP40-SP4     |          | Kit for plasterboard 4 pcs.        |      |       | 1/100 |

**5** Years Warranty



## Panel Avra 60x60 UGR<19



110° IP44 UGR<19 RA ≥80 PF>0,9 PMMA -20|+40°C 60.000h


| CODE         |          | WATT                               | CCT  | LUMEN |       |
|--------------|----------|------------------------------------|------|-------|-------|
| LP28BLW5.UGR | <b>F</b> | 28                                 | 3000 | 3300  | 1/5   |
| LP28BLC5.UGR | <b>F</b> | 28                                 | 4000 | 3300  | 1/5   |
| LP28BLD5.UGR | <b>F</b> | 28                                 | 6500 | 3300  | 1/5   |
| EMDRLP40     |          | LED emergency driver for panel 40W |      |       | 1/100 |
| LP60-ARW     |          | Surface frame                      |      |       | 1/20  |
| LP40-K       |          | Hanging tool 2.5m                  |      |       | 1/100 |
| LP40-SP4     |          | Kit for plasterboard 4 pcs.        |      |       | 1/100 |



**5** Years  
Warranty



Panel Avra 60x60 UGR<19




110° **IP44** **UGR<19** **RA** ≥80 **PF**>0,9 **PMMA** -20|+40 °C 60.000h

| CODE         |          | WATT                               | CCT  | LUMEN |       |
|--------------|----------|------------------------------------|------|-------|-------|
| LP40BLW5.UGR | <b>F</b> | 40                                 | 3000 | 4000  | 1/5   |
| LP40BLC5.UGR | <b>F</b> | 40                                 | 4000 | 4000  | 1/5   |
| LP40BLD5.UGR | <b>F</b> | 40                                 | 6500 | 4000  | 1/5   |
| LF-GDE042YF  |          | Driver 0-10V Lifud                 |      |       | 1/16  |
| LF-GDE042YFS |          | Driver Dali Lifud                  |      |       | 1/16  |
| EMDRLP40     |          | LED emergency driver for panel 40W |      |       | 1/100 |
| LP60FR       |          | Surface frame                      |      |       | 1/20  |
| LP40-K       |          | Hanging tool 2.5m                  |      |       | 1/100 |
| LP40-SP4     |          | Kit for plasterboard 4 pcs.        |      |       | 1/100 |

**5** Years  
Warranty



Panel Lithos 60x60 UGR<19




110° **IP44** **UGR<19** **RA** ≥80 **PF**>0,9 **PMMA** -20|+40 °C 60.000h

| CODE     |          | WATT                        | CCT  | LUMEN |       |
|----------|----------|-----------------------------|------|-------|-------|
| LP66G44W | <b>F</b> | 40                          | 3000 | 4400  | 1/6   |
| LP66G44C | <b>F</b> | 40                          | 4000 | 4400  | 1/6   |
| LP66G66W | <b>F</b> | 60                          | 3000 | 6600  | 1/6   |
| LP66G66C | <b>F</b> | 60                          | 4000 | 6600  | 1/6   |
| LP60FR   |          | Surface frame               |      |       | 1/20  |
| LP40-K   |          | Hanging tool 2.5m           |      |       | 1/100 |
| LP40-SP4 |          | Kit for plasterboard 4 pcs. |      |       | 1/100 |

**3** Years Warranty



Panel Eco 120x30

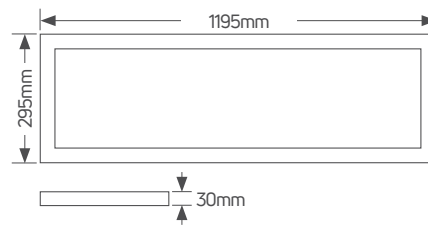

110° **IP20** **RA ≥80**


PF>0,9 **PMMA** -20|+40 °C **40.000h**

| CODE      |          | WATT                                 | CCT  | LUMEN |       |
|-----------|----------|--------------------------------------|------|-------|-------|
| LP13BLW   | <b>F</b> | 40                                   | 3000 | 4000  | 1/5   |
| LP13BLC   | <b>F</b> | 40                                   | 4000 | 4000  | 1/5   |
| LP13BLD   | <b>F</b> | 40                                   | 6500 | 4000  | 1/5   |
| EMDRLP40  |          | LED emergency driver for panel 40W   |      |       | 1/100 |
| LP13FR    |          | Surface frame for Panel Eco 120x30   |      |       | 1/20  |
| LP40-K    |          | Hanging tool for Panels, 6pcs., 2.5m |      |       | 1/100 |
| LP120-SP8 |          | Kit for plasterboard 8 pcs.          |      |       | 1/100 |

**5** Years Warranty



Panel Slim 120x30

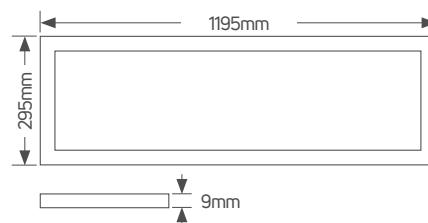


110° **IP20** **RA ≥80** PF>0,9

**PMMA** -20|+40 °C **50.000h**

| CODE         |          | WATT                               | CCT  | LUMEN |       |
|--------------|----------|------------------------------------|------|-------|-------|
| LP120-30W5   | <b>E</b> | 40                                 | 3000 | 5000  | 1/5   |
| LP120-30C5   | <b>E</b> | 40                                 | 4000 | 5000  | 1/5   |
| LP120-30D5   | <b>E</b> | 40                                 | 6500 | 5000  | 1/5   |
| EMDRLP40     |          | LED emergency driver for panel 40W |      |       | 1/100 |
| LF-GDE042YF  |          | Driver 0-10V Lifud                 |      |       | 1/16  |
| LF-GDE042YFS |          | Driver Dali Lifud                  |      |       | 1/16  |
| LP120-30ARW  |          | Surface frame                      |      |       | 1/20  |
| LP40-K       |          | Hanging tool 2.5m                  |      |       | 1/100 |
| LP120-SP8    |          | Kit for plasterboard 8 pcs.        |      |       | 1/100 |

**5** Years  
Warranty

## Panel Slim 120x30 UGR<19

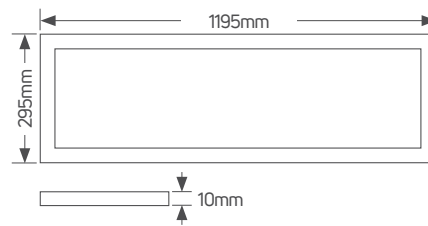

110°

**IP44**

**UGR<19**

**RA**  
≥80

**PF>0,9**

**PMMA**

**-20 | +40 °C**


**50.000h**

| CODE           |          | WATT                               | CCT  | LUMEN |       |
|----------------|----------|------------------------------------|------|-------|-------|
| LP120-30W5.UGR | <b>E</b> | 40                                 | 3000 | 4400  | 1/5   |
| LP120-30C5.UGR | <b>E</b> | 40                                 | 4000 | 4400  | 1/5   |
| LP120-30D5.UGR | <b>E</b> | 40                                 | 6500 | 4400  | 1/5   |
| EMDRLP40       |          | LED emergency driver for panel 40W |      |       | 1/100 |
| LF-GDE042YF    |          | Driver 0-10V Lifud                 |      |       | 1/16  |
| LF-GDE042YFS   |          | Driver Dali Lifud                  |      |       | 1/16  |
| LP120-30ARW    |          | Surface frame                      |      |       | 1/20  |
| LP40-K         |          | Hanging tool 2.5m                  |      |       | 1/100 |
| LP120-SP8      |          | Kit for plasterboard 8 pcs.        |      |       | 1/100 |

**5** Years  
Warranty



## Panel Avra 120x30 UGR<19

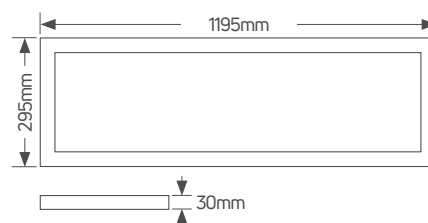

110°

**IP44**

**UGR<19**

**RA**  
≥80

**PF>0,9**

**PMMA**

**-20 | +40 °C**


**50.000h**

| CODE         |          | WATT                               | CCT  | LUMEN |       |
|--------------|----------|------------------------------------|------|-------|-------|
| LP13BLW5.UGR | <b>F</b> | 40                                 | 3000 | 4000  | 1/5   |
| LP13BLC5.UGR | <b>F</b> | 40                                 | 4000 | 4000  | 1/5   |
| LP13BLD5.UGR | <b>F</b> | 40                                 | 6500 | 4000  | 1/5   |
| EMDRLP40     |          | LED emergency driver for panel 40W |      |       | 1/100 |
| LF-GDE042YF  |          | Driver 0-10V Lifud                 |      |       | 1/16  |
| LF-GDE042YFS |          | Driver Dali Lifud                  |      |       | 1/16  |
| LP13FR       |          | Surface frame                      |      |       | 1/20  |
| LP40-K       |          | Hanging tool 2.5m                  |      |       | 1/100 |
| LP120-SP8    |          | Kit for plasterboard 8 pcs.        |      |       | 1/100 |

**5** Years  
Warranty



Panel Lithos 120x30 UGR<19

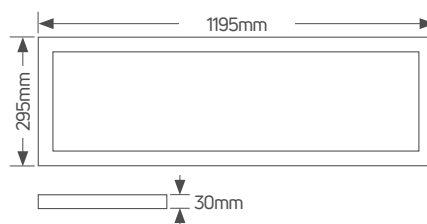

110°

**IP44**


**UGR<19**

**RA**  
≥80

**PF>0,9**

**-20 | +40 °C**

**60.000h**

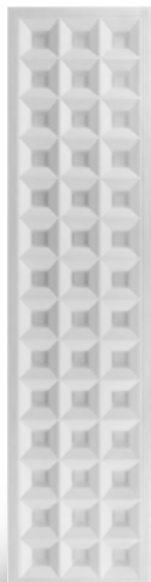


| CODE      |          | WATT                        | CCT  | LUMEN |       |
|-----------|----------|-----------------------------|------|-------|-------|
| LP13G44W  | <b>F</b> | 40                          | 3000 | 4400  | 1/6   |
| LP13G44C  | <b>F</b> | 40                          | 4000 | 4400  | 1/6   |
| LP13G66W  | <b>F</b> | 60                          | 3000 | 6600  | 1/6   |
| LP13G66C  | <b>F</b> | 60                          | 4000 | 6600  | 1/6   |
| LP13FR    |          | Surface frame               |      |       | 1/20  |
| LP40-K    |          | Hanging tool 2.5m           |      |       | 1/100 |
| LP120-SP8 |          | Kit for plasterboard 8 pcs. |      |       | 1/100 |



**5** Years  
Warranty



Panel Avra 60x30 UGR<19

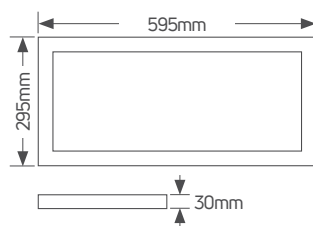


110° **IP44** **UGR<19** **RA ≥80**  
 PF>0,9 -20|+40 °C 60.000h

| CODE         |          | WATT                        | CCT  | LUMEN |       |
|--------------|----------|-----------------------------|------|-------|-------|
| LP63BLW5.UGR | <b>F</b> | 24                          | 3000 | 2160  | 1/5   |
| LP63BLC5.UGR | <b>F</b> | 24                          | 4000 | 2160  | 1/5   |
| LP63BLD5.UGR | <b>F</b> | 24                          | 6500 | 2160  | 1/5   |
| LF-GDE030YFA |          | Driver 0-10V Lifud          |      |       | 1/16  |
| LF-GDE030YFS |          | Driver Dali Lifud           |      |       | 1/16  |
| LP63FR       |          | Surface frame               |      |       | 1/20  |
| LP40-K       |          | Hanging tool 2.5m           |      |       | 1/100 |
| LP40-SP4     |          | Kit for plasterboard 4 pcs. |      |       | 1/100 |

**5** Years  
Warranty



Panel Avra 120x60 UGR<19

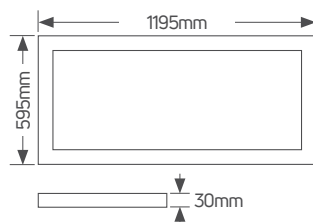


110° **IP44** **UGR<19** **RA ≥80**  
 PF>0,9 -20|+40 °C 60.000h

| CODE         |          | WATT                        | CCT  | LUMEN |       |
|--------------|----------|-----------------------------|------|-------|-------|
| LP16BLW5.UGR | <b>F</b> | 60                          | 3000 | 6000  | 1/5   |
| LP16BLC5.UGR | <b>F</b> | 60                          | 4000 | 6000  | 1/5   |
| LP16BLD5.UGR | <b>F</b> | 60                          | 6500 | 6000  | 1/5   |
| LF-GDE060YFA |          | Driver 0-10V Lifud          |      |       | 1/16  |
| LF-GDE060YFS |          | Driver Dali Lifud           |      |       | 1/16  |
| LP16FR       |          | Surface frame               |      |       | 1/20  |
| LP60K        |          | Hanging tool 2.5m           |      |       | 1/100 |
| LP120-SP8    |          | Kit for plasterboard 8 pcs. |      |       | 1/100 |




**5** Years  
Warranty



| CODE        | DESCRIPTION                             |   |
|-------------|-----------------------------------------|---|
| LF-GIF040YA | Driver Flicker Free for Panel 40W Lifud | 1 |


**5** Years  
Warranty



0-10V

| CODE        | DESCRIPTION                      |   |
|-------------|----------------------------------|---|
| LF-GDE042YF | Driver 0-10V for Panel 40W Lifud | 1 |

**5** Years  
Warranty




DALI

| CODE         | DESCRIPTION                     |   |
|--------------|---------------------------------|---|
| LF-GDE042YFS | Driver Dali for Panel 40W Lifud | 1 |




**7** Years  
Warranty



CE TÜV SÜD 100-277 VAC -30 | +50 °C

| CODE        | DESCRIPTION                                    |   |
|-------------|------------------------------------------------|---|
| LF-GSD040YC | Driver Dali/0-10V/PUSH/PWM for Panel 40W Lifud | 1 |


**5** Years  
Warranty



CE TÜV SÜD 220-240 VAC -30 | +50 °C

| CODE        | DESCRIPTION                             |   |
|-------------|-----------------------------------------|---|
| LF-GIF030YA | Driver Flicker Free for Panel 24W Lifud | 1 |


**5** Years  
Warranty



CE TÜV SÜD 100-277 VAC -30 | +50 °C 0-10V

| CODE         | DESCRIPTION                      |   |
|--------------|----------------------------------|---|
| LF-GDE030YFA | Driver 0-10V for Panel 24W Lifud | 1 |


**5** Years  
Warranty

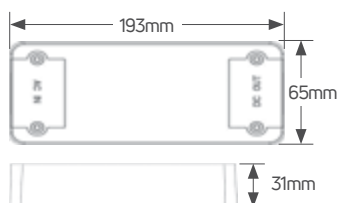

CE TÜV SÜD 100-277 VAC -30 | +50 °C DALI

| CODE         | DESCRIPTION                     |   |
|--------------|---------------------------------|---|
| LF-GDE030YFS | Driver Dali for Panel 24W Lifud | 1 |


**5** Years  
Warranty

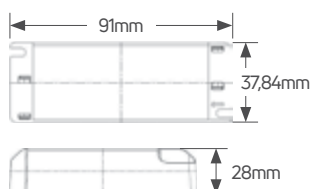

CE TÜV SÜD 220-240 VAC -30 | +50 °C

| CODE        | DESCRIPTION                             |   |
|-------------|-----------------------------------------|---|
| LF-GIF060YA | Driver Flicker Free for Panel 60W Lifud | 1 |


**5** Years  
Warranty

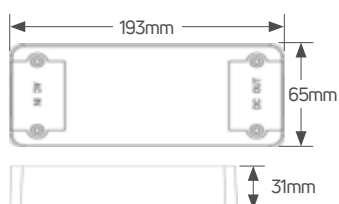

CE TÜV SÜD 100-277 VAC -30 | +50 °C 0-10V

| CODE         | DESCRIPTION                      |   |
|--------------|----------------------------------|---|
| LF-GDE060YFA | Driver 0-10V for Panel 60W Lifud | 1 |

5 Years  
Warranty



CE TUV SÜD 100-277 VAC -30 | +50 °C DALI

| CODE         | DESCRIPTION               |   |
|--------------|---------------------------|---|
| LF-GDE060YFS | Driver Dali for Panel 60W | 1 |





## Lighting **Fixtures**


## Fixtures for LED T8 IP20

IP20 1 Year Warranty



| CODE      | BASE | LENGTH    |      |
|-----------|------|-----------|------|
| FT8S0.6-0 | G13  | 1 x 0.60m | 1/60 |
| FT8D0.6-0 | G13  | 2 x 0.60m | 1/60 |
| FT8S1.2-0 | G13  | 1 x 1.20m | 1/60 |
| FT8D1.2-0 | G13  | 2 x 1.20m | 1/60 |
| FT8S1.5-0 | G13  | 1 x 1.50m | 1/60 |
| FT8D1.5-0 | G13  | 2 x 1.50m | 1/60 |

## LED Lighting fixtures IP20



125°

IP20

RA ≥80

PF>0,5



-20 | +40 °C

2 Years Warranty



30.000h




| CODE     | WATT | CCT  | LUMEN | LENGHT (A) mm |      |
|----------|------|------|-------|---------------|------|
| LBT8-0.6 | 8.5  | 4000 | 1050  | 600           | 1/20 |
| LBT8-1.2 | 20   | 4000 | 1800  | 1200          | 1/20 |
| LBT8-1.5 | 25   | 4000 | 2300  | 1500          | 1/20 |





## Fixtures for LED T8 60cm IP65



**IP65**

**PC+PC**


**-20|+40 °C**

**2** Years Warranty

| CODE      | BASE | LAMPS  |      |
|-----------|------|--------|------|
| FT8S0.6HP | G13  | 1x0.6m | 1/15 |
| FT8D0.6HP | G13  | 2x0.6m | 1/10 |



## Fixtures for LED T8 1.20m IP65



**IP65**

**PC+PC**


**-20|+40 °C**

**2** Years Warranty

| CODE      | BASE | LAMPS  |      |
|-----------|------|--------|------|
| FT8S1.2HP | G13  | 1x1.2m | 1/15 |
| FT8D1.2HP | G13  | 2x1.2m | 1/10 |



## Fixtures for LED T8 1.50m IP65



**IP65**

**PC+PC**

**-20|+40 °C**


**2** Years Warranty

| CODE      | BASE | LAMPS  |      |
|-----------|------|--------|------|
| FT8S1.5HP | G13  | 1x1.5m | 1/15 |
| FT8D1.5HP | G13  | 2x1.5m | 1/10 |

**5** Years  
Warranty



## LED Luminaire 60cm IP65



150lm/W IP65 IK08


PC+PC -20|+40 °C 50.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LT8W0.6S | E | 12   | 3000 | 1560  | 1/20 |
| LT8C0.6S | E | 12   | 4000 | 1560  | 1/20 |
| LT8D0.6S | E | 12   | 6500 | 1560  | 1/20 |
| LT8W0.6D | E | 21   | 3000 | 2730  | 1/20 |
| LT8C0.6D | E | 21   | 4000 | 2730  | 1/20 |
| LT8D0.6D | E | 21   | 6500 | 2730  | 1/20 |

**5** Years  
Warranty



## LED Luminaire 1.20m IP65



150lm/W IP65 IK08


PC+PC -20|+40 °C 50.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LT8W1.2S | E | 24   | 3000 | 3120  | 1/15 |
| LT8C1.2S | E | 24   | 4000 | 3120  | 1/15 |
| LT8D1.2S | E | 24   | 6500 | 3120  | 1/15 |
| LT8W1.2D | E | 40   | 3000 | 5200  | 1/15 |
| LT8C1.2D | E | 40   | 4000 | 5200  | 1/15 |
| LT8D1.2D | E | 40   | 6500 | 5200  | 1/15 |



**5** Years  
Warranty

## LED Luminaire 1.50m IP65




150lm/W IP65 IK08

PC+PC -20|+40 °C 50.000h

| CODE       |  | WATT | CCT  | LUMEN |      |
|------------|--|------|------|-------|------|
| LT8W1.5S   |  | 33   | 3000 | 4290  | 1/12 |
| LT8C1.5S   |  | 33   | 4000 | 4290  | 1/12 |
| LT8D1.5S   |  | 33   | 6500 | 4290  | 1/12 |
| LT8W1.5D   |  | 55   | 4000 | 7150  | 1/12 |
| LT8C1.5D   |  | 55   | 4000 | 7150  | 1/12 |
| LT8D1.5D   |  | 55   | 6500 | 7150  | 1/12 |
| LT8C1.5D66 |  | 66   | 4000 | 8580  | 1/12 |
| LT8D1.5D66 |  | 66   | 6500 | 8580  | 1/12 |
| LT8C1.5D80 |  | 80   | 4000 | 10400 | 1/12 |
| LT8D1.5D80 |  | 80   | 6500 | 10400 | 1/12 |

## LED Luminaire IP65 Emergency



150lm/W IP65 IK08 PC+PC

3hs autonomy -20|+40 °C 50.000h

| CODE       |  | WATT | CCT  | LUMEN | DIMENSIONS |    |      |
|------------|--|------|------|-------|------------|----|------|
|            |  |      |      |       | A          | B  |      |
| LT8C1.2DEM |  | 40   | 4000 | 5200  | 1180       | 61 | 1/15 |
| LT8C1.5DEM |  | 55   | 4000 | 7150  | 1480       | 61 | 1/12 |



Cabinet Light 4W



  
120°

  
IP20

  
RA ≥80

  
220-240 VAC

  
-20 | +40 °C

  
2 Years Warranty

  
25.000h





| CODE   |   | WATT                  | CCT  | LUMEN |      |
|--------|---|-----------------------|------|-------|------|
| LWT530 | E | 4                     | 3000 | 460   | 1/20 |
| LCT530 | E | 4                     | 4000 | 480   | 1/20 |
| LT5-CC |   | Extension cable, 15cm |      |       | 1/1  |

# LED Cabinet Lights

**GEYER**

## Cabinet Light 8W



120°  
**IP20**  
RA ≥80  
220-240 VAC  
-20 | +40 °C  
2 Years Warranty  
25.000h

| CODE   |          | WATT                  | CCT  | LUMEN |      |
|--------|----------|-----------------------|------|-------|------|
| LWT560 | <b>E</b> | 8                     | 3000 | 920   | 1/20 |
| LCT560 | <b>E</b> | 8                     | 4000 | 960   | 1/20 |
| LT5-CC |          | Extension cable, 15cm |      |       | 1/1  |


## Cabinet Light 10W



120°  
**IP20**  
RA ≥80  
220-240 VAC  
-20 | +40 °C  
2 Years Warranty  
25.000h

| CODE   |          | WATT                  | CCT  | LUMEN |      |
|--------|----------|-----------------------|------|-------|------|
| LWT590 | <b>E</b> | 10                    | 3000 | 1150  | 1/20 |
| LCT590 | <b>E</b> | 10                    | 4000 | 1200  | 1/20 |
| LT5-CC |          | Extension cable, 15cm |      |       | 1/1  |

## Cabinet Light 14W



120°  
**IP20**  
RA ≥80  
220-240 VAC  
-20 | +40 °C  
2 Years Warranty  
25.000h


| CODE    |          | WATT                  | CCT  | LUMEN |      |
|---------|----------|-----------------------|------|-------|------|
| LWT5120 | <b>E</b> | 14                    | 3000 | 1610  | 1/20 |
| LCT5120 | <b>E</b> | 14                    | 4000 | 1680  | 1/20 |
| LT5-CC  |          | Extension cable, 15cm |      |       | 1/1  |



## PIR Sensors

# PIR Sensors

**GEYER**




**IP20**

**220-240 VAC**

**-20 | +40 °C**

**2 Years Warranty**

| CODE  | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|-------|------------|---------------------|-------------------|------|
| SIM-S | 360°       | 6                   | 3-2000            | 1/10 |

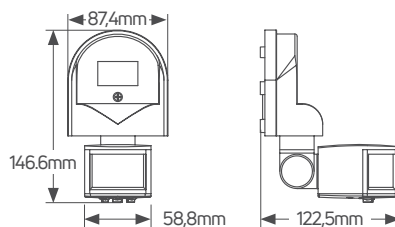


**IP44**

**220-240 VAC**

**-20 | +40 °C**

**2 Years Warranty**

| CODE  | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|-------|------------|---------------------|-------------------|------|
| SIM-B | 180°       | 5-12                | 3-2000            | 1/10 |



**IP44**


**220-240 VAC**

**-20 | +40 °C**

**2 Years Warranty**


| CODE  | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|-------|------------|---------------------|-------------------|------|
| SIM-M | 180°       | 12                  | 3-2000            | 1/10 |






**IP44** ⚡ **220-240 VAC** 🌡️ **-20 | +40 °C** **5 Years Warranty**

| CODE   |   | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|--------|---|------------|---------------------|-------------------|------|
| 123359 | ○ | 220°       | 12                  | 3-2000            | 1/10 |
| 123366 | ● | 220°       | 12                  | 3-2000            | 1/10 |




**IP44** ⚡ **220-240 VAC** 🌡️ **-20 | +40 °C** **5 Years Warranty**

| CODE   | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|--------|------------|---------------------|-------------------|------|
| 123373 | 360°       | 8                   | 3-2000            | 1/10 |



**IP44** ⚡ **220-240 VAC** 🌡️ **-20 | +40 °C** **5 Years Warranty**

| CODE   | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|--------|------------|---------------------|-------------------|------|
| 123380 | 360°       | 12                  | 3-2000            | 1/10 |



IP65


220-240  
VAC

-20 | +40 °C

5 Years  
Warranty



| CODE   | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|--------|------------|---------------------|-------------------|------|
| 123397 | 180°       | 12                  | 3-2000            | 1/10 |

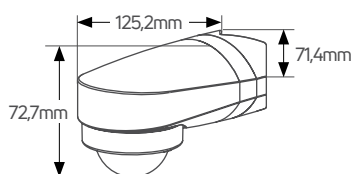

IP65

220-240  
VAC

-20 | +40 °C

5 Years  
Warranty




| CODE   | BEAM ANGLE | DETECTION RANGE (m) | SENSITIVITY (lux) |      |
|--------|------------|---------------------|-------------------|------|
| 123403 | 240°       | 10                  | 3-2000            | 1/10 |





## Emergency **Lights**

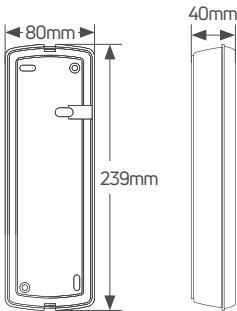

⚡ **200-245**  
VAC      🌡️ **-10 | +55 °C**      **3** Years  
Warranty

| CODE    |                                                                                     | DESCRIPTION                                          |  |
|---------|-------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------|
| LE-D3   |  | LED Emergency Light                                  | 1                                                                                   |
| LE-D3BR |                                                                                     | Recessed installation kit for emergency light LE-D3  | 1                                                                                   |
| LE-D3PN |                                                                                     | Suspended installation kit for emergency light LE-D3 | 1                                                                                   |




## High**bays**

**3** Years Warranty



Highbay Economy 100W

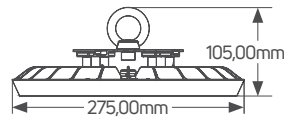

90°

**IP65**

**IK10**

**RA**  
>70

**100-277**  
VAC

**PF>0,95**

**-30 | +50 °C**


**50.000h**

| CODE      | WATT | CCT  | LUMEN |   |
|-----------|------|------|-------|---|
| LHB100RNS | 100  | 5000 | 10000 | 1 |

**3** Years Warranty



Highbay Economy 150W



90°

**IP65**

**IK10**

**RA**  
>70

**100-277**  
VAC

**PF>0,95**

**-30 | +50 °C**


**50.000h**

| CODE      | WATT | CCT  | LUMEN |   |
|-----------|------|------|-------|---|
| LHB150RNS | 150  | 5000 | 15000 | 1 |

**3** Years Warranty



Highbay Economy 200W



90°

**IP65**

**IK10**

**RA**  
>70

**100-277**  
VAC


**PF>0,95**

**-30 | +50 °C**

**50.000h**

| CODE      | WATT | CCT  | LUMEN |   |
|-----------|------|------|-------|---|
| LHB200RNS | 200  | 5000 | 20000 | 1 |

## Reflector

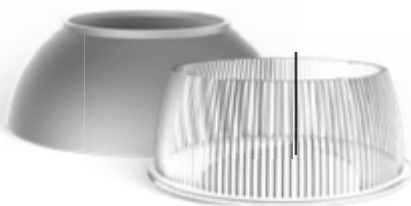


| CODE    | DESCRIPTION                       |   |
|---------|-----------------------------------|---|
| LHCAPAL | Alu Reflector for Highbay Economy | 1 |
| LHCAPPC | PC Reflector for Highbay Economy  | 1 |

**5** Years Warranty



Highbay Premium 60W

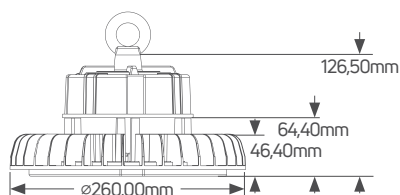


60,90° **IP65** **IK10** **RA** >70  
 100-277 VAC PF>0,95 -30|+50 °C 50.000h

| CODE       | WATT | CCT  | LUMEN | BEAM ANGLE |   |
|------------|------|------|-------|------------|---|
| LHB60CSG60 | 60   | 4000 | 7800  | 60         | 1 |
| LHB60CSG90 | 60   | 4000 | 7800  | 90         | 1 |
| LHB60DSG60 | 60   | 6500 | 7800  | 60         | 1 |
| LHB60DSG90 | 60   | 6500 | 7800  | 90         | 1 |

**5** Years Warranty



Highbay Premium 100W

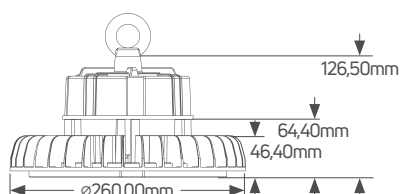


60,90° **IP65** **IK10** **RA** >70  
 100-277 VAC PF>0,95 -30|+50 °C 50.000h

| CODE        | WATT | CCT  | LUMEN | BEAM ANGLE |   |
|-------------|------|------|-------|------------|---|
| LHB100CSG60 | 100  | 4000 | 13000 | 60         | 1 |
| LHB100CSG90 | 100  | 4000 | 13000 | 90         | 1 |
| LHB100DSG60 | 100  | 6500 | 13000 | 60         | 1 |
| LHB100DSG90 | 100  | 6500 | 13000 | 90         | 1 |

**5** Years Warranty



Highbay Premium 150W

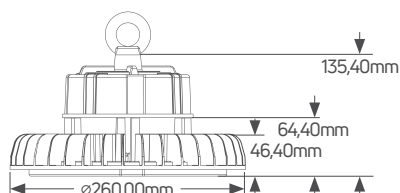


60,90° **IP65** **IK10** **RA** >70  
 100-277 VAC PF>0,95 -30|+50 °C 50.000h

| CODE        | WATT | CCT  | LUMEN | BEAM ANGLE |   |
|-------------|------|------|-------|------------|---|
| LHB150CSG60 | 150  | 4000 | 19500 | 60         | 1 |
| LHB150CSG90 | 150  | 4000 | 19500 | 90         | 1 |
| LHB150DSG60 | 150  | 6500 | 19500 | 60         | 1 |
| LHB150DSG90 | 150  | 6500 | 19500 | 90         | 1 |

**5** Years  
Warranty



## Highbay Premium 200W

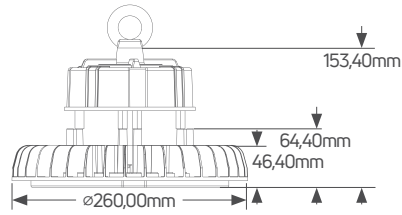


60,90° **IP65** **IK10** **RA**  
>70  
100-277 VAC PF>0,95 -30 | +50 °C 50.000h

| CODE        | WATT | CCT  | LUMEN | BEAM ANGLE |   |
|-------------|------|------|-------|------------|---|
| LHB200CSG60 | 200  | 4000 | 26000 | 60         | 1 |
| LHB200CSG90 | 200  | 4000 | 26000 | 90         | 1 |
| LHB200DSG60 | 200  | 6500 | 26000 | 60         | 1 |
| LHB200DSG90 | 200  | 6500 | 26000 | 90         | 1 |

**5** Years  
Warranty




## Highbay Premium 240W

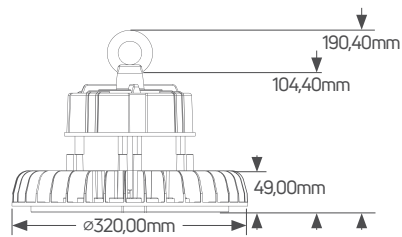

60,90° **IP65** **IK10** **RA**  
>70  
100-277 VAC PF>0,95 -30 | +50 °C 50.000h

| CODE        | WATT | CCT  | LUMEN | BEAM ANGLE |   |
|-------------|------|------|-------|------------|---|
| LHB240CSG60 | 240  | 4000 | 31200 | 60         | 1 |
| LHB240CSG90 | 240  | 4000 | 31200 | 90         | 1 |
| LHB240DSG60 | 240  | 6500 | 31200 | 60         | 1 |
| LHB240DSG90 | 240  | 6500 | 31200 | 90         | 1 |

## Reflector

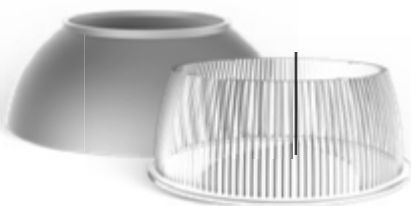


| CODE      | DESCRIPTION                                |   |
|-----------|--------------------------------------------|---|
| LHCAP60AL | Aluminum reflector for Highbay Premium 60° | 1 |
| LHCAP90AL | Aluminum reflector for Highbay Premium 90° | 1 |
| LHCAP70PC | PC reflector for Highbay Premium 60°       | 1 |
| LHCAP90PC | PC reflector for Highbay Premium 90°       | 1 |



**5** Years  
Warranty



LED Linear Highbay 100W

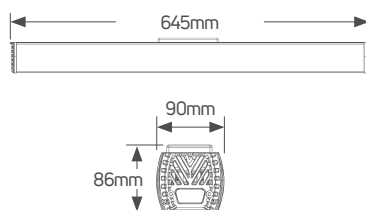

30°\*80° **lm/W** 130 **220-240** VAC


**RA** ≥80 **IP65** **IK06** **PF**>0,92

| CODE        | WATT | CCT  | LUMEN | BEAM ANGLE |     |
|-------------|------|------|-------|------------|-----|
| LINHB100CAS | 100  | 4000 | 13000 | 30°*80     | 1/4 |

**5** Years  
Warranty



LED Linear Highbay 150W

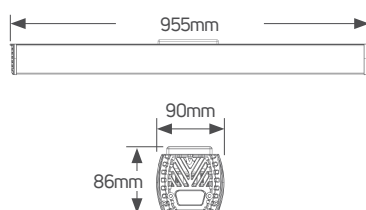

30°\*80° **lm/W** 130 **220-240** VAC


**RA** ≥80 **IP65** **IK06** **PF**>0,92

| CODE        | WATT | CCT  | LUMEN | BEAM ANGLE |     |
|-------------|------|------|-------|------------|-----|
| LINHB150CAS | 150  | 4000 | 19500 | 30°*80     | 1/4 |

**5** Years  
Warranty



LED Linear Highbay 200W

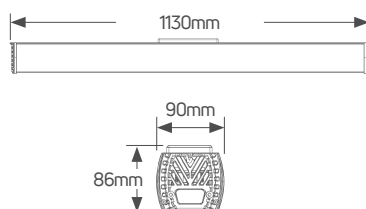

30°\*80° **lm/W** 130 **220-240** VAC

**RA** ≥80 **IP65** **IK06** **PF**>0,92


| CODE        | WATT | CCT  | LUMEN | BEAM ANGLE |     |
|-------------|------|------|-------|------------|-----|
| LINHB200CAS | 200  | 4000 | 26000 | 30°*80     | 1/4 |





## LED Canopy

## Canopy 100W Surface/Recessed



Cut Hole: 310x185mm



90°

**IP65**

**85-265 VAC**


**PF>0,95**

**3 Years Warranty**

**-35 | +45 °C**

| CODE      | WATT | CCT  | LUMEN |     |
|-----------|------|------|-------|-----|
| LGSC100SR | 100  | 4000 | 10000 | 1/4 |

## Canopy 150W Surface/Recessed



Cut Hole: 310x265mm



90°

**IP65**

**85-265 VAC**


**PF>0,95**

**3 Years Warranty**

**-35 | +45 °C**

| CODE      | WATT | CCT  | LUMEN |     |
|-----------|------|------|-------|-----|
| LGSC150SR | 150  | 4000 | 15000 | 1/4 |

## Canopy 200W Surface/Recessed



Cut Hole: 350x310mm



90°

**IP65**

**85-265 VAC**

**PF>0,95**

**3 Years Warranty**

**-35 | +45 °C**

| CODE      | WATT | CCT  | LUMEN |     |
|-----------|------|------|-------|-----|
| LGSC200SR | 200  | 4000 | 20000 | 1/4 |



## Street **Lights**

**3** Years  
Warranty



Economy



150x80°

IP65

CRI  
>80

110-277  
VAC

-20 | +50 °C

50.000h

| CODE             |   | WATT | CCT  | LUMEN |
|------------------|---|------|------|-------|
| LSTR.LRS2.60.40  | F | 60   | 4000 | 6000  |
| LSTR.LRS2.100.40 | F | 100  | 4000 | 10000 |
| LSTR.LRS2.150.40 | F | 150  | 4000 | 15000 |
| LSTR.LRS2.200.40 | F | 200  | 4000 | 20000 |

**5** Years  
Warranty



Economy Plus II



65x135°

IP65

CRI  
>70

200-240  
VAC

-20 | +50 °C

25.000h

| CODE            | WATT | CCT  | LUMEN |
|-----------------|------|------|-------|
| LSTR.EC2.025.40 | 20   | 4000 | 2400  |
| LSTR.EC2.035.40 | 30   | 4000 | 3600  |
| LSTR.EC2.060.40 | 50   | 4000 | 6000  |
| LSTR.EC2.085.40 | 70   | 4000 | 8400  |
| LSTR.EC2.120.40 | 100  | 4000 | 12000 |
| LSTR.EC2.145.40 | 120  | 4000 | 14400 |
| LSTR.EC2.180.40 | 150  | 4000 | 18000 |
| LSTR.EC2.210.40 | 175  | 4000 | 21000 |



# GEYER




## LED Floodlights

**3** Years Warranty



Floodlight 10W Black

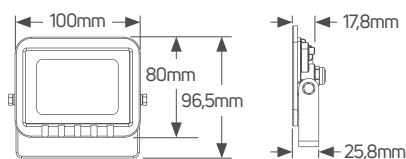

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** **220-240 VAC** **-20 | +40 °C** **30.000h**

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRM10W3 | F | 10   | 3000 | 850   | 1/80 |
| LPRM10C3 | F | 10   | 4000 | 850   | 1/80 |
| LPRM10D3 | F | 10   | 6500 | 850   | 1/80 |

**3** Years Warranty



Floodlight 20W Black

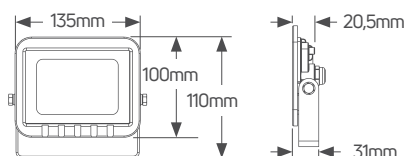

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** **220-240 VAC** **-20 | +40 °C** **30.000h**

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRM20W3 | F | 20   | 3000 | 1700  | 1/50 |
| LPRM20C3 | F | 20   | 4000 | 1700  | 1/50 |
| LPRM20D3 | F | 20   | 6500 | 1700  | 1/50 |

**3** Years Warranty



Floodlight 30W Black

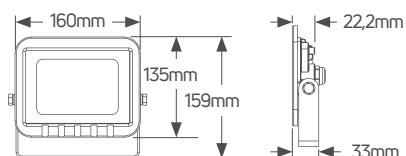

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** **220-240 VAC** **-20 | +40 °C** **30.000h**

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRM30W3 | F | 30   | 3000 | 2550  | 1/30 |
| LPRM30C3 | F | 30   | 4000 | 2550  | 1/30 |
| LPRM30D3 | F | 30   | 6500 | 2550  | 1/30 |

**3** Years  
Warranty



Floodlight 50W Black

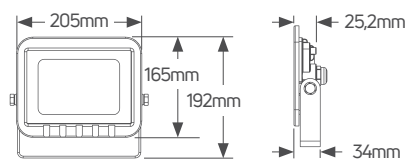

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRM50W3 | F | 50   | 3000 | 4250  | 1/20 |
| LPRM50C3 | F | 50   | 4000 | 4250  | 1/20 |
| LPRM50D3 | F | 50   | 6500 | 4250  | 1/20 |

**3** Years  
Warranty



Floodlight 100W Black

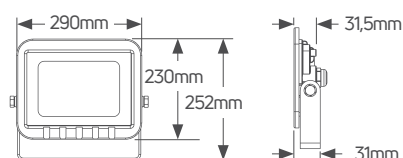

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h

| CODE      |   | WATT | CCT  | LUMEN |      |
|-----------|---|------|------|-------|------|
| LPRM100W3 | F | 100  | 3000 | 8500  | 1/10 |
| LPRM100C3 | F | 100  | 4000 | 8500  | 1/10 |
| LPRM100D3 | F | 100  | 6500 | 8500  | 1/10 |

**3** Years  
Warranty



Floodlight 150W Black

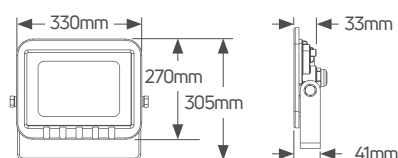

120° **lm/W** 85 **IP65** **IK10**

**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h


| CODE      |   | WATT | CCT  | LUMEN |     |
|-----------|---|------|------|-------|-----|
| LPRM150W3 | F | 150  | 3000 | 12750 | 1/5 |
| LPRM150C3 | F | 150  | 4000 | 12750 | 1/5 |
| LPRM150D3 | F | 150  | 6500 | 12750 | 1/5 |



**3** Years  
Warranty



Floodlight 200W Black

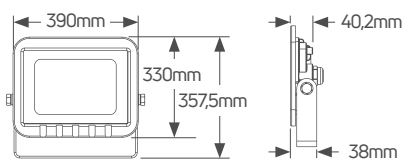

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** ⚡ **220-240 VAC** 🌡️ **-20 | +40 °C** ⌚ **30.000h**

| CODE      |   | WATT | CCT  | LUMEN |     |
|-----------|---|------|------|-------|-----|
| LPRM200W3 | F | 200  | 3000 | 17000 | 1/5 |
| LPRM200C3 | F | 200  | 4000 | 17000 | 1/5 |
| LPRM200D3 | F | 200  | 6500 | 17000 | 1/5 |

**3** Years  
Warranty



Floodlight 300W Black

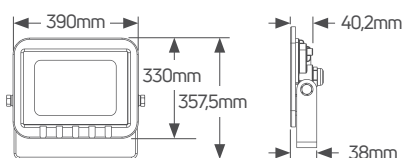

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** ⚡ **220-240 VAC** 🌡️ **-20 | +40 °C** ⌚ **30.000h**

| CODE      |   | WATT | CCT  | LUMEN |     |
|-----------|---|------|------|-------|-----|
| LPRM300W3 | F | 300  | 3000 | 24000 | 1/5 |
| LPRM300C3 | F | 300  | 4000 | 24000 | 1/5 |
| LPRM300D3 | F | 300  | 6500 | 24000 | 1/5 |



**3** Years  
Warranty

## Floodlight 10W White




120° **lm/W** 85 **IP65** **IK10**

**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRW10W3 | F | 10   | 3000 | 850   | 1/80 |
| LPRW10C3 | F | 10   | 4000 | 850   | 1/80 |
| LPRW10D3 | F | 10   | 6500 | 850   | 1/80 |

**3** Years  
Warranty

## Floodlight 20W White

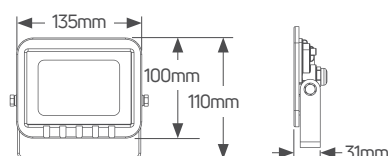


120° **lm/W** 85 **IP65** **IK10**

**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRW20W3 | F | 20   | 3000 | 1700  | 1/50 |
| LPRW20C3 | F | 20   | 4000 | 1700  | 1/50 |
| LPRW20D3 | F | 20   | 6500 | 1700  | 1/50 |

**3** Years  
Warranty

## Floodlight 30W White

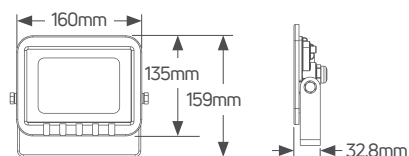


120° **lm/W** 85 **IP65** **IK10**

**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRW30W3 | F | 30   | 3000 | 2550  | 1/30 |
| LPRW30C3 | F | 30   | 4000 | 2550  | 1/30 |
| LPRW30D3 | F | 30   | 6500 | 2550  | 1/30 |

3 Years  
Warranty

## Floodlight 50W White



120° **lm/W** 85 **IP65** **IK10**


**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h



| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LPRW50W3 | F | 50   | 3000 | 4250  | 1/20 |
| LPRW50C3 | F | 50   | 4000 | 4250  | 1/20 |
| LPRW50D3 | F | 50   | 6500 | 4250  | 1/20 |

3 Years  
Warranty

## Floodlight 100W White

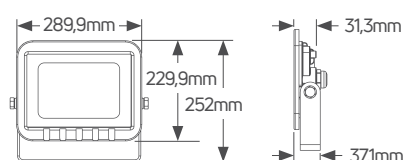

120° **lm/W** 85 **IP65** **IK10**


**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h



| CODE      |   | WATT | CCT  | LUMEN |      |
|-----------|---|------|------|-------|------|
| LPRW100W3 | F | 100  | 3000 | 8500  | 1/10 |
| LPRW100C3 | F | 100  | 4000 | 8500  | 1/10 |
| LPRW100D3 | F | 100  | 6500 | 8500  | 1/10 |

**3** Years Warranty

## Floodlight 20W Black Sensor

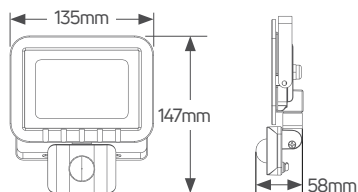


120° **lm/W** 85 **IP44** **IK10**

**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h

| CODE      |   | WATT | CCT  | LUMEN |      |
|-----------|---|------|------|-------|------|
| LPRM20WS3 | F | 20   | 3000 | 1700  | 1/30 |
| LPRM20CS3 | F | 20   | 4000 | 1700  | 1/30 |
| LPRM20DS3 | F | 20   | 6500 | 1700  | 1/30 |

**3** Years Warranty

## Floodlight 50W Black Sensor

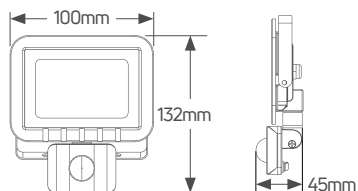


120° **lm/W** 85 **IP44** **IK10**

**CLASS I** ⚡ 220-240 VAC 🌡️ -20 | +40 °C ⌚ 30.000h

| CODE      |   | WATT | CCT  | LUMEN |      |
|-----------|---|------|------|-------|------|
| LPRM50WS3 | F | 50   | 3000 | 4250  | 1/20 |
| LPRM50CS3 | F | 50   | 4000 | 4250  | 1/20 |
| LPRM50DS3 | F | 50   | 6500 | 4250  | 1/20 |

**3** Years  
Warranty

## Floodlight 20W White Sensor

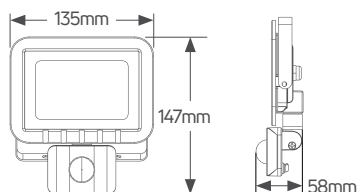

120°

lm/W  
85

IP44

IK10

CLASS I

220-240  
VAC

-20 | +40 °C


30.000h



| CODE      |   | WATT | CCT  | LUMEN |      |
|-----------|---|------|------|-------|------|
| LPRW20WS3 | F | 20   | 3000 | 1700  | 1/30 |
| LPRW20CS3 | F | 20   | 4000 | 1700  | 1/30 |

**3** Years  
Warranty

## Floodlight 50W White Sensor

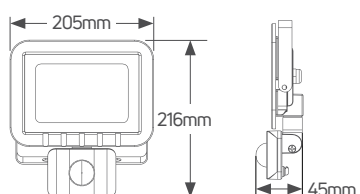

120°

lm/W  
85

IP44

IK10

CLASS I

220-240  
VAC

-20 | +40 °C

30.000h




| CODE      |   | WATT | CCT  | LUMEN |      |
|-----------|---|------|------|-------|------|
| LPRW50WS3 | F | 50   | 3000 | 4250  | 1/20 |
| LPRW50CS3 | F | 50   | 4000 | 4250  | 1/20 |

**5** Years Warranty



Himor 50W

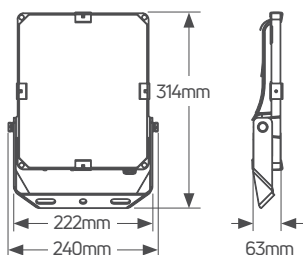


60°  
lm/W 125  
CRI >70  
IP66 IK08  
CLASS I  
PF>0,95  
100-240 VAC  
-40|+70 °C  
50.000h

| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.F15.006.30 | 50   | 3000 | 6250  | 1 |
| LSP.F15.006.40 | 50   | 4000 | 6250  | 1 |

**5** Years Warranty



Himor 100W

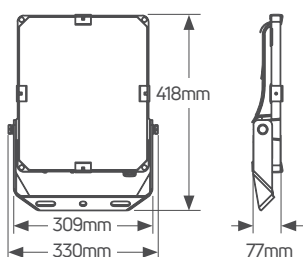


60°  
lm/W 125  
CRI >70  
IP66 IK08  
CLASS I  
PF>0,95  
100-240 VAC  
-40|+70 °C  
50.000h

| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.F15.012.30 | 100  | 3000 | 12500 | 1 |
| LSP.F15.012.40 | 100  | 4000 | 12500 | 1 |

**5** Years Warranty



Himor 150W

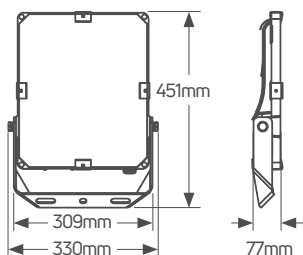


60°  
lm/W 125  
CRI >70  
IP66 IK08  
CLASS I  
PF>0,95  
100-240 VAC  
-40|+70 °C  
50.000h

| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.F15.019.30 | 150  | 3000 | 18750 | 1 |
| LSP.F15.019.40 | 150  | 4000 | 18750 | 1 |

**5** Years Warranty



Himor 200W

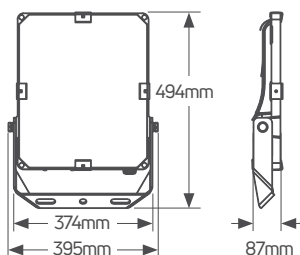


60° **lm/W** 125 **CRI** >70 **IP66** **IK08**  
**CLASS** | **PF**>0,95 **100-240 VAC** **-40 | +70 °C** **50.000h**

| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.F15.025.30 | 200  | 3000 | 25000 | 1 |
| LSP.F15.025.40 | 200  | 4000 | 25000 | 1 |

**5** Years Warranty



Himor 300W

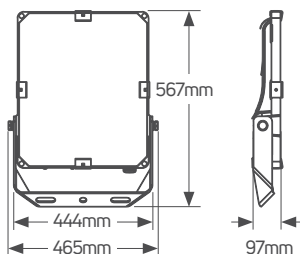

60° **lm/W** 125 **CRI** >70 **IP66** **IK08**  
**CLASS** | **PF**>0,95 **100-240 VAC** **-40 | +70 °C** **50.000h**

| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.F15.038.30 | 300  | 3000 | 37500 | 1 |
| LSP.F15.038.40 | 300  | 4000 | 37500 | 1 |





# LED Floodlights

**GEYER**

**5** Years Warranty 

Vario II 150W



**IP65**

**CRI >70**

**220-240 VAC**



**-35 | +40 °C**



| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.VL2.025.50 | 150  | 5000 | 21750 | 1 |

**5** Years Warranty 

Vario II 220W



**IP65**

**CRI >70**

**220-240 VAC**



**-35 | +40 °C**



| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.VL2.035.50 | 220  | 5000 | 31900 | 1 |

**5** Years Warranty 

Vario II 300W



**IP65**

**CRI >70**

**220-240 VAC**

**-35 | +40 °C**





| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.VL2.045.50 | 300  | 5000 | 43500 | 1 |

**5** Years  
Warranty



Vario II 450W



50-150°

**IP65**

**CRI**  
>70

**220-240**  
VAC



-35 | +40 °C





| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.VL2.065.50 | 450  | 5000 | 65250 | 1 |

**5** Years  
Warranty



Vario II 600W



50-150°

**IP65**

**CRI**  
>70

**220-240**  
VAC



-35 | +40 °C



| CODE           | WATT | CCT  | LUMEN |   |
|----------------|------|------|-------|---|
| LSP.VL2.085.50 | 600  | 5000 | 87000 | 1 |



## Sports **Lights** **Stadium & Arena**

## Record

lm/W  
125

10, 30, 60°

IP66

IK08

CRI  
>70/80

CLASS I

100-277  
VAC

PF&gt;0,9

5 Years  
Warranty

50.000h

-40 | +70 °C



| CODE           | TYPE          | LUMEN  | WATT |
|----------------|---------------|--------|------|
| LSP.REC.031.XX | HD-FL02-250W  | 31250  | 250  |
| LSP.REC.038.XX | HD-FL02-300W  | 37500  | 300  |
| LSP.REC.050.XX | HD-FL02-400W  | 50000  | 400  |
| LSP.REC.063.XX | HD-FL02-500W  | 62500  | 500  |
| LSP.REC.075.XX | HD-FL02-600W  | 75000  | 600  |
| LSP.REC.094.XX | HD-FL02-750W  | 93750  | 750  |
| LSP.REC.125.XX | HD-FL02-1000W | 125000 | 1000 |
| LSP.REC.156.XX | HD-FL02-1250W | 156250 | 1250 |

\*XX=30 for 3000K    XX=40 for 4000K    XX=50 for 5000K  
 XX=57 for 5700K    XX=65 for 6500K

## Arena Lit

lm/W  
130

IP65

IK08

CLASS I

100-240 | 100-277  
VAC

PF&gt;0,9

5 Years  
Warranty

-30 | +45 °C



| CODE          | TYPE              | LUMEN  | WATT |
|---------------|-------------------|--------|------|
| LSP.ARL059.XX | FK-VD450-XXXN-HA2 | 58500  | 450  |
| LSP.ARL078.XX | FK-VD600-XXXN-HA2 | 78000  | 600  |
| LSP.ARL104.XX | FK-VD800-XXXN-HA2 | 104000 | 800  |

\*XX=40 for 4000K    XX=50 for 5000K    XX=57 for 5700K

## Optima

lm/W 140  30, 45, 80° **IP66** **IK10** **CRI >70** **CLASS I**

 100-277 VAC  PF>0,95 **5** Years Warranty  80.000h  -30 | +60 °C



| CODE           | TYPE          | LUMEN  | WATT |
|----------------|---------------|--------|------|
| LSP.OPT.056.XX | HD-FL03-400W  | 56000  | 400  |
| LSP.OPT.070.XX | HD-FL03-500W  | 70000  | 500  |
| LSP.OPT.090.XX | HD-FL03-630W  | 88200  | 630  |
| LSP.OPT.112.XX | HD-FL03-800W  | 112000 | 800  |
| LSP.OPT.140.XX | HD-FL03-1000W | 140000 | 1000 |
| LSP.OPT.175.XX | HD-FL03-1260W | 176400 | 1260 |
| LSP.OPT.224.XX | HD-FL03-1600W | 224000 | 1600 |
| LSP.OPT.280.XX | HD-FL03-2000W | 280000 | 2000 |
| LSP.OPT.336.XX | HD-FL03-2400W | 336000 | 2400 |

\*XX=40 for 4000K XX=50 for 5000K XX=57 for 5700K

## Sunbright II


lm/W 130/150  15, 20, 30, 40, 60, 80° **IP66** **IK10** **CRI >80** **CLASS I**

 100-277 VAC  PF>0,95 **5** Years Warranty  80.000h  -30 | +60 °C



| CODE           | TYPE               | LUMEN  | WATT |
|----------------|--------------------|--------|------|
| LSP.SB2.045.XX | HD-SP06-300WD-X-A  | 45000  | 300  |
| LSP.SB2.060.XX | HD-SP06-400WD-X-A  | 60000  | 400  |
| LSP.SB2.075.XX | HD-SP06-500WD-X-A  | 75000  | 500  |
| LSP.SB2.090.XX | HD-SP06-600WD-X-A  | 90000  | 600  |
| LSP.SB2.098.XX | HD-SP06-750WD-X-A  | 975000 | 750  |
| LSP.SB2.130.XX | HD-SP06-1000WD-X-A | 130000 | 1000 |
| LSP.SB2.156.XX | HD-SP06-1230WD-X-A | 156000 | 1200 |

\*XX=40 for 4000K XX=50 for 5000K XX=57 for 5700K


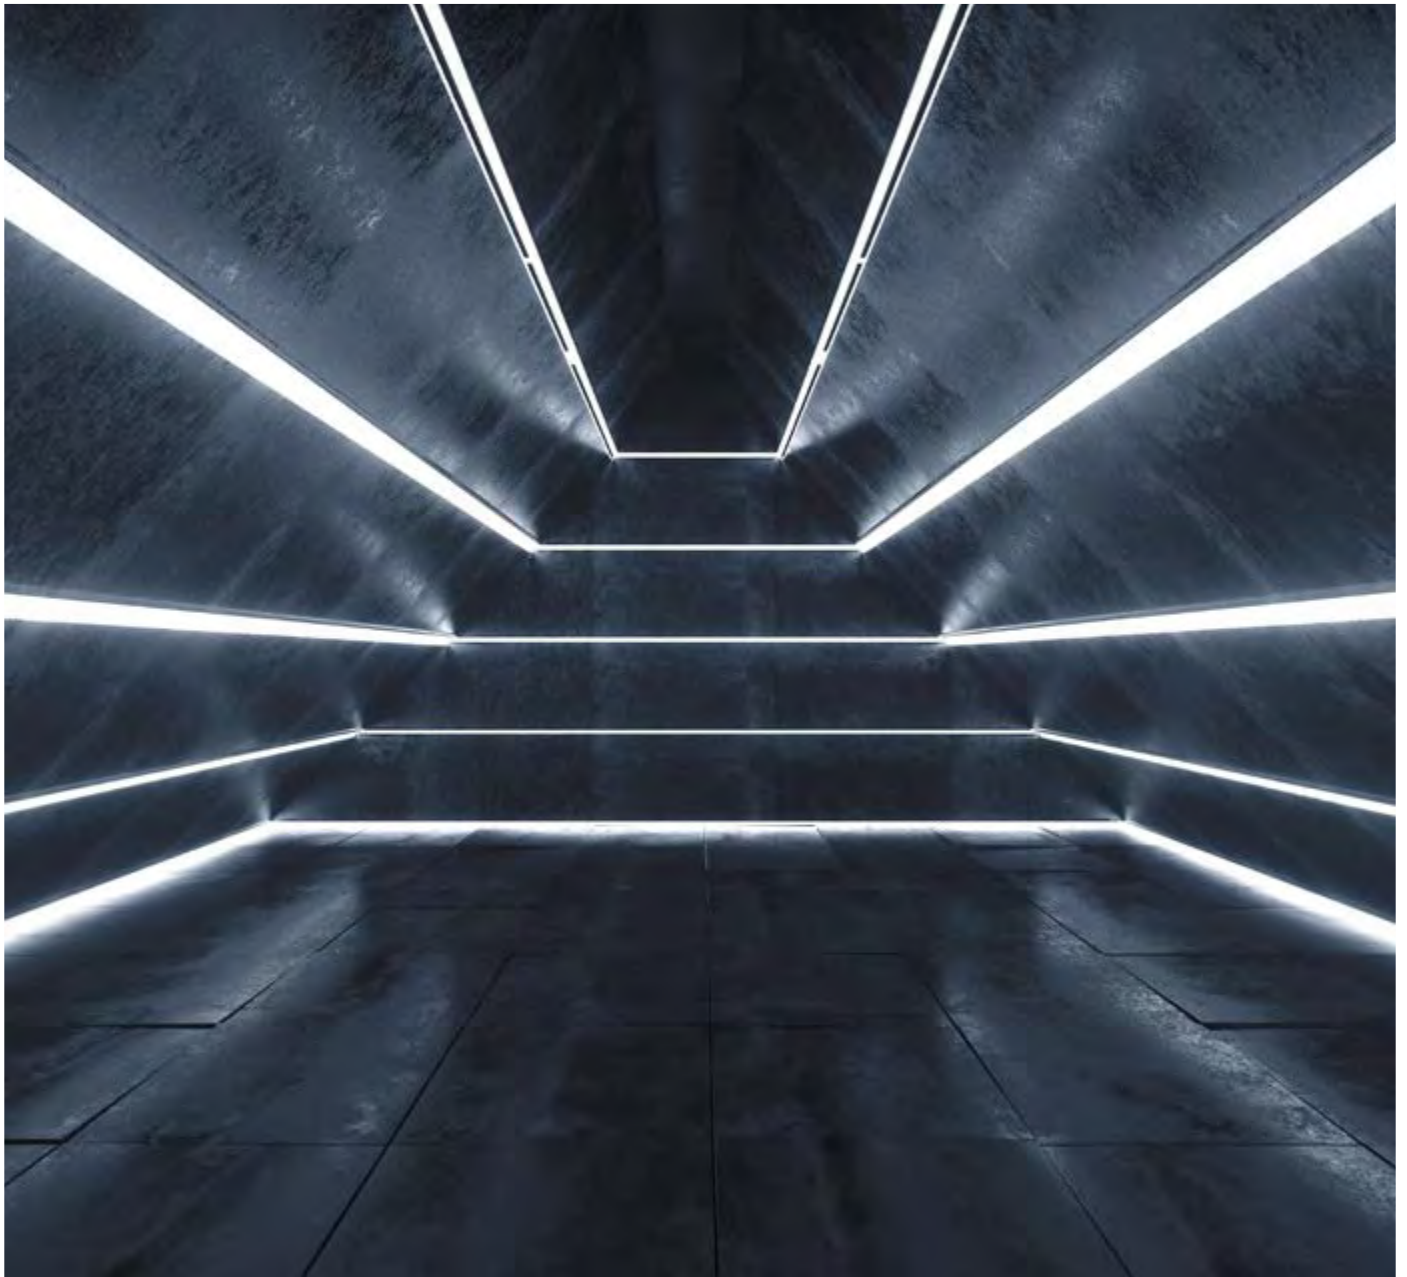


## LED **Strips**



**2** Years Warranty


## LED Strip 4.8W 12V IP20 Eco



| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LE48122720  | 4.8  | 12V  | 2700 | 480   | 5/150 |
| LE48123020  | 4.8  | 12V  | 3000 | 480   | 5/500 |
| LE48124020  | 4.8  | 12V  | 4000 | 480   | 5/150 |
| LE48126520  | 4.8  | 12V  | 6500 | 480   | 5/150 |
| LE4812RGB20 | 4.8  | 12V  | RGB  |       | 5/150 |

**2** Years Warranty

## LED Strip 7.2W 12V IP20 Eco





| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LE72122720  | 7.2  | 12V  | 2700 | 800   | 5/150 |
| LE72123020  | 7.2  | 12V  | 3000 | 800   | 5/150 |
| LE72124020  | 7.2  | 12V  | 4000 | 800   | 5/125 |
| LE72126520  | 7.2  | 12V  | 6500 | 800   | 5/125 |
| LE7212RGB20 | 7.2  | 12V  | RGB  |       | 5/125 |



**2** Years Warranty



## LED Strip 14.4W 12V IP20 Eco



| CODE         | WATT | VOLT | CCT  | LUMEN |       |
|--------------|------|------|------|-------|-------|
| LE144122720  | 14.4 | 12V  | 2700 | 1400  | 5/150 |
| LE144123020  | 14.4 | 12V  | 3000 | 1400  | 5/500 |
| LE144124020  | 14.4 | 12V  | 4000 | 1400  | 5/125 |
| LE144126520  | 14.4 | 12V  | 6500 | 1400  | 5/125 |
| LE14412RGB20 | 14.4 | 12V  | RGB  |       | 5/150 |
| LE14412RE20  | 14.4 | 12V  |      | 1400  | 5/125 |
| LE14412GR20  | 14.4 | 12V  |      | 1400  | 5/125 |
| LE14412YE20  | 14.4 | 12V  |      | 1400  | 5/125 |
| LE14412BL20  | 14.4 | 12V  |      | 1400  | 5/125 |



## LED Strip 14.4W 24V IP20 Eco



| CODE         | WATT | VOLT | CCT  | LUMEN |       |
|--------------|------|------|------|-------|-------|
| LE144242720  | 14.4 | 24V  | 2700 | 1400  | 5/150 |
| LE144243020  | 14.4 | 24V  | 3000 | 1400  | 5/150 |
| LE144244020  | 14.4 | 24V  | 4000 | 1400  | 5/125 |
| LE144246520  | 14.4 | 24V  | 6500 | 1400  | 5/125 |
| LE14424RGB20 | 14.4 | 24V  | RGB  |       | 5/125 |

**2** Years Warranty

**24V**





# LED Strips Eco

**GEYER**

**2** Years Warranty


## LED Strip 4.8W 12V IP65 Eco



| CODE       | WATT | VOLT | CCT  | LUMEN |       |
|------------|------|------|------|-------|-------|
| LE48122765 | 4.8  | 12V  | 2700 | 480   | 5/150 |
| LE48123065 | 4.8  | 12V  | 3000 | 480   | 5/150 |
| LE48124065 | 4.8  | 12V  | 4000 | 480   | 5/400 |
| LE48126565 | 4.8  | 12V  | 6500 | 480   | 5/150 |

**2** Years Warranty


## LED Strip 7.2W 12V IP65 Eco



| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LE72122765  | 7.2  | 12V  | 2700 | 800   | 5/150 |
| LE72123065  | 7.2  | 12V  | 3000 | 800   | 5/150 |
| LE72124065  | 7.2  | 12V  | 4000 | 800   | 5/125 |
| LE72126565  | 7.2  | 12V  | 6500 | 800   | 5/125 |
| LE7212RGB65 | 7.2  | 12V  | RGB  |       | 5/150 |

**2** Years Warranty

## LED Strip 14.4W 12V IP65 Eco



| CODE         | WATT | VOLT | CCT  | LUMEN |       |
|--------------|------|------|------|-------|-------|
| LE144122765  | 14.4 | 12V  | 2700 | 1400  | 5/150 |
| LE144123065  | 14.4 | 12V  | 3000 | 1400  | 5/300 |
| LE144124065  | 14.4 | 12V  | 4000 | 1400  | 5/125 |
| LE144126565  | 14.4 | 12V  | 6500 | 1400  | 5/125 |
| LE14412RGB65 | 14.4 | 12V  | RGB  |       | 5/125 |



**2** Years  
Warranty

## LED Strip Kit 7.2W

120° dimmable SMD 2835 IP20 30.000h

| CODE   |   | DESCRIPTION                                   |   |
|--------|---|-----------------------------------------------|---|
| 139244 | E | LED Strip KIT 7.2W 12V 3000K IP20 3m + Driver | 1 |
| 139251 | E | LED Strip KIT 7.2W 12V 6500K IP20 3m + Driver | 1 |

## LED Strip Kit 14.4W

120° dimmable SMD 2835 IP20 30.000h

| CODE   |   | DESCRIPTION                                    |   |
|--------|---|------------------------------------------------|---|
| 139268 | G | LED Strip KIT 14.4W 12V 3000K IP20 3m + Driver | 1 |
| 139275 | G | LED Strip KIT 14.4W 12V 6500K IP20 3m + Driver | 1 |

## LED Strip Kit 14.4W RGB - Addressable

120° dimmable SMD 5050 IP20 30.000h


| CODE   |   | DESCRIPTION                                                           |   |
|--------|---|-----------------------------------------------------------------------|---|
| 139282 | G | LED Strip KIT 14.4W 12V RGB IP20 3m + Controller + Driver             | 1 |
| 139459 | G | LED Strip KIT 14.4W 12V RGB Addressable IP20 3m + Controller + Driver | 1 |

## LED Strip Kit 14.4W IP65

120° dimmable SMD 5050 IP65 30.000h

| CODE          |  | DESCRIPTION                                                   |   |
|---------------|--|---------------------------------------------------------------|---|
| LSKIT144RGB65 |  | LED Strip KIT 14.4W 12V RGB IP65 5m + RGB Controller + Driver | 1 |


**2** Years  
Warranty

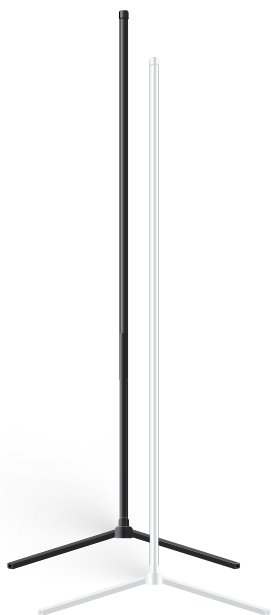

## LED Floor Light 18W RGBW - Addressable


**SMD**  
**5050**    **IP20**    **30.000h**

| CODE   |   | DESCRIPTION                                             |      |
|--------|---|---------------------------------------------------------|------|
| 139299 | ● | LED Floor Light Innova 18W 24V RGBW + controller        | 1/20 |
| 139305 | ○ | LED Floor Light Innova 18W 24V RGBW + controller        | 1/20 |
| 139312 | ● | LED Floor Light Innova 18W 24V Addressable + controller | 1/20 |
| 139329 | ○ | LED Floor Light Innova 18W 24V Addressable + controller | 1/20 |

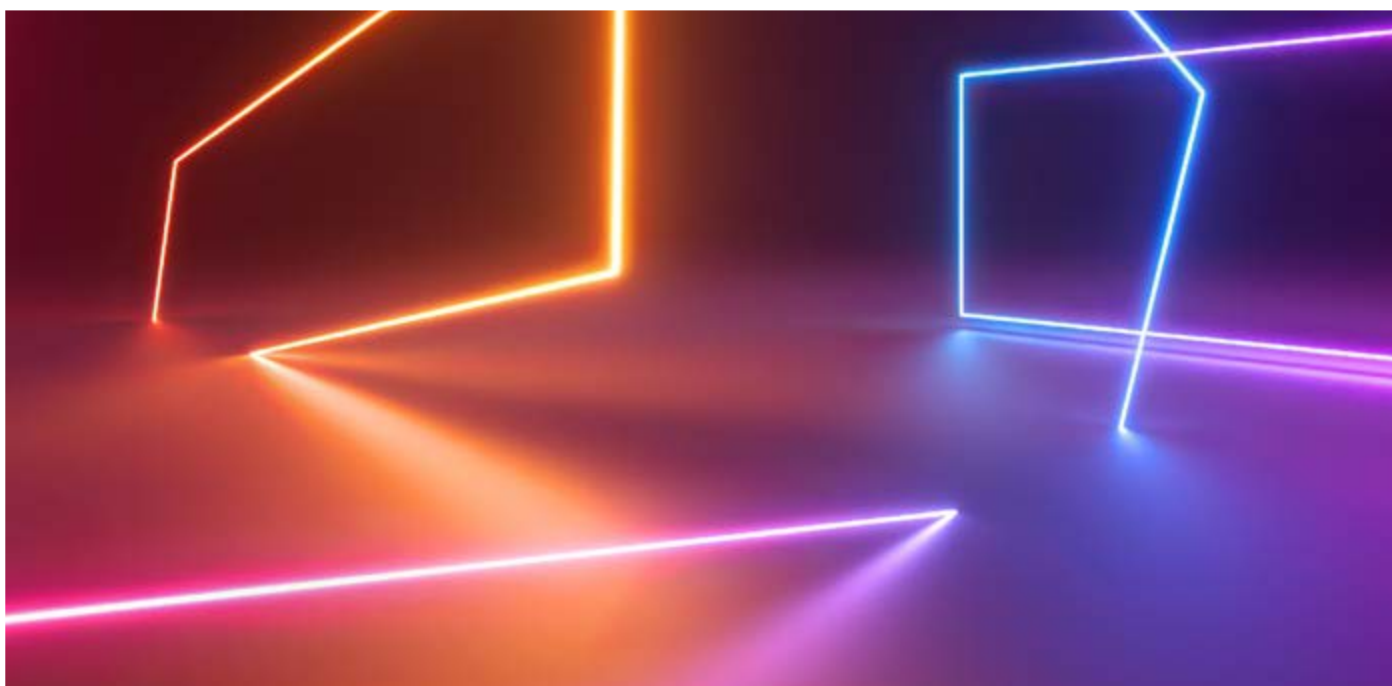

**5** Years  
Warranty

## LED Strip 4.8W 12V IP33 Premium



**SMD**  
2835

**IP33**

**RA**  
≥70

**-25 | +45 °C**


**30.000h**



| CODE       | WATT | VOLT | CCT  | LUMEN |       |
|------------|------|------|------|-------|-------|
| LP48122733 | 4.8  | 12V  | 2700 | 420   | 5/300 |
| LP48123033 | 4.8  | 12V  | 3000 | 420   | 5/300 |
| LP48124033 | 4.8  | 12V  | 4000 | 420   | 5/300 |
| LP48126533 | 4.8  | 12V  | 6500 | 420   | 5/300 |

## LED Strip 7.2W 12V IP33 Premium

**5** Years  
Warranty



**SMD**  
2835

**IP33**

**RA**  
≥70

**-25 | +45 °C**


**30.000h**



| CODE        | WATT | VOLT | CCT  | LUMEN                                                                                 |       |
|-------------|------|------|------|---------------------------------------------------------------------------------------|-------|
| LP72122733  | 7.2  | 12V  | 2700 | 800                                                                                   | 5/300 |
| LP72123033  | 7.2  | 12V  | 3000 | 800                                                                                   | 5/300 |
| LP72124033  | 7.2  | 12V  | 4000 | 800                                                                                   | 5/300 |
| LP72126533  | 7.2  | 12V  | 6500 | 800                                                                                   | 5/300 |
| LP7212RGB33 | 7.2  | 12V  | RGB  |  | 5/250 |

**5** Years  
Warranty

## LED Strip 14.4W 12V IP33 Premium



120°



dimmable

SMD  
2835

IP33

RA  
≥70


-25 | +45 °C

30.000h

| CODE         | WATT | VOLT | CCT  | LUMEN |       |
|--------------|------|------|------|-------|-------|
| LP144122733  | 14.4 | 12V  | 2700 | 1400  | 5/300 |
| LP144123033  | 14.4 | 12V  | 3000 | 1400  | 5/300 |
| LP144124033  | 14.4 | 12V  | 4000 | 1400  | 5/300 |
| LP144126533  | 14.4 | 12V  | 6500 | 1400  | 5/300 |
| LP14412RGB33 | 14.4 | 12V  | RGB  |       | 5/250 |
| LP14412BL33  | 14.4 | 12V  |      | 1400  | 5/300 |
| LP14412YE33  | 14.4 | 12V  |      | 1400  | 5/300 |
| LP14412RE33  | 14.4 | 12V  |      | 1400  | 5/300 |
| LP14412GR33  | 14.4 | 12V  |      | 1400  | 5/300 |



## LED Strip 17.3W 24V IP33 Premium



120°



dimmable

SMD  
2835

IP33

RA  
≥70

-25 | +45 °C

30.000h

| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LP173242733 | 17.3 | 24V  | 2700 | 2000  | 5/300 |
| LP173243033 | 17.3 | 24V  | 3000 | 2000  | 5/300 |
| LP173244033 | 17.3 | 24V  | 4000 | 2000  | 5/300 |
| LP173246533 | 17.3 | 24V  | 6500 | 2000  | 5/300 |

**24V**



**5** Years  
Warranty



**5** Years Warranty



## LED Strip 4.8W 12V IP65 Premium





| CODE       | WATT | VOLT | CCT  | LUMEN |       |
|------------|------|------|------|-------|-------|
| LP48122765 | 4.8  | 12V  | 2700 | 420   | 5/300 |
| LP48123065 | 4.8  | 12V  | 3000 | 420   | 5/300 |
| LP48124065 | 4.8  | 12V  | 4000 | 420   | 5/300 |
| LP48126565 | 4.8  | 12V  | 6500 | 420   | 5/300 |

**5** Years Warranty



## LED Strip 7.2W 12V IP65 Premium




| CODE       | WATT | VOLT | CCT  | LUMEN |       |
|------------|------|------|------|-------|-------|
| LP72122765 | 7.2  | 12V  | 2700 | 800   | 5/300 |
| LP72123065 | 7.2  | 12V  | 3000 | 800   | 5/300 |
| LP72124065 | 7.2  | 12V  | 4000 | 800   | 5/300 |
| LP72126565 | 7.2  | 12V  | 6500 | 800   | 5/300 |



**5** Years  
Warranty

## LED Strip 14.4W 12V IP65 Premium



120°



dimmable

SMD  
2835

IP65

RA  
≥70


-25 | +45 °C

30.000h



| CODE         | WATT | VOLT | CCT  | LUMEN |       |
|--------------|------|------|------|-------|-------|
| LP144122765  | 14.4 | 12V  | 2700 | 1400  | 5/300 |
| LP144123065  | 14.4 | 12V  | 3000 | 1400  | 5/300 |
| LP144124065  | 14.4 | 12V  | 4000 | 1400  | 5/300 |
| LP144126565  | 14.4 | 12V  | 6500 | 1400  | 5/300 |
| LP14412RGB65 | 14.4 | 12V  | RGB  |       | 5/250 |

## LED Strip 17.3W 24V IP65 Premium



120°



dimmable

SMD  
2835

IP65

RA  
≥70

-25 | +45 °C

30.000h

**5** Years  
Warranty

**24V**



| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LP173242765 | 17.3 | 24V  | 2700 | 2000  | 5/300 |
| LP173243065 | 17.3 | 24V  | 3000 | 2000  | 5/300 |
| LP173244065 | 17.3 | 24V  | 4000 | 2000  | 5/300 |
| LP173246565 | 17.3 | 24V  | 6500 | 2000  | 5/300 |

# LED Strips Premium




5 Years  
Warranty

IP68



LED Strip 14.4W 12V IP68 Premium



  
120°

  
dimmable

  
SMD  
2835

  
RA  
≥70

  
-25 | +45 °C

  
30.000h

| CODE        | WATT | VOLT | CCT                                                                                 | LUMEN |       |
|-------------|------|------|-------------------------------------------------------------------------------------|-------|-------|
| LP144123068 | 14.4 | 12V  | 3000                                                                                | 1400  | 5/300 |
| LP144126568 | 14.4 | 12V  | 6500                                                                                | 1400  | 5/300 |
| LP14412BL68 | 14.4 | 12V  |  | -     | 5/300 |




**5** Years  
Warranty

**RA90**



## LED Strip 4.8W 24V IP33 Diamond



120°



dimmable

**SMD**  
3528


**IP33**

-25 | +45 °C

30.000h

| CODE       | WATT | VOLT | CCT  | LUMEN |       |
|------------|------|------|------|-------|-------|
| LD48242733 | 4.8  | 24V  | 2700 | 480   | 5/300 |
| LD48243033 | 4.8  | 24V  | 3000 | 480   | 5/300 |
| LD48244033 | 4.8  | 24V  | 4000 | 480   | 5/300 |
| LD48246533 | 4.8  | 24V  | 6500 | 480   | 5/300 |

## LED Strip 7.2W 24V IP33 Diamond



120°



dimmable

**SMD**  
2835

**IP33**

-25 | +45 °C

30.000h

| CODE       | WATT | VOLT | CCT  | LUMEN |       |
|------------|------|------|------|-------|-------|
| LD72242733 | 7.2  | 24V  | 2700 | 1080  | 5/300 |
| LD72243033 | 7.2  | 24V  | 3000 | 1080  | 5/300 |
| LD72244033 | 7.2  | 24V  | 4000 | 1080  | 5/300 |
| LD72246533 | 7.2  | 24V  | 6500 | 1080  | 5/300 |

**5** Years  
Warranty

**RA90**




**5** Years  
Warranty

**RA90**



## LED Strip 14.4W 24V IP33 Diamond



**SMD**  
2835


**IP33**

-25 | +45 °C

30.000h

| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LD144242733 | 14,4 | 24V  | 2700 | 2100  | 5/300 |
| LD144243033 | 14,4 | 24V  | 3000 | 2100  | 5/300 |
| LD144244033 | 14,4 | 24V  | 4000 | 2100  | 5/300 |
| LD144246533 | 14,4 | 24V  | 6500 | 2100  | 5/300 |

## LED Strip 17.3W 24V IP33 Diamond



**SMD**  
2835

**IP33**

-25 | +45 °C

30.000h

| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LD173242733 | 17,3 | 24V  | 2700 | 2400  | 5/300 |
| LD173243033 | 17,3 | 24V  | 3000 | 2400  | 5/300 |
| LD173244033 | 17,3 | 24V  | 4000 | 2400  | 5/300 |
| LD173246533 | 17,3 | 24V  | 6500 | 2400  | 5/300 |

**5** Years  
Warranty



**RA90**



**5** Years  
Warranty



**RA90**

## LED Strip 14.4W 24V IP33 COB



| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LC144242733 | 14,4 | 24V  | 2700 | 1440  | 5/300 |
| LC144243033 | 14,4 | 24V  | 3000 | 1440  | 5/300 |
| LC144244033 | 14,4 | 24V  | 4000 | 1440  | 5/300 |
| LC144246533 | 14,4 | 24V  | 6500 | 1440  | 5/300 |
| LC14424BL33 | 14,4 | 24V  |      | 1200  | 5/300 |
| LC14424GR33 | 14,4 | 24V  |      | 1200  | 5/300 |
| LC14424RE33 | 14,4 | 24V  |      | 1200  | 5/300 |
| LC14424YE33 | 14,4 | 24V  |      | 1200  | 5/300 |

## LED Strip 14.4W 24V IP65 COB



| CODE        | WATT | VOLT | CCT  | LUMEN |       |
|-------------|------|------|------|-------|-------|
| LC144242765 | 14,4 | 24V  | 2700 | 1440  | 5/300 |
| LC144243065 | 14,4 | 24V  | 3000 | 1440  | 5/300 |
| LC144244065 | 14,4 | 24V  | 4000 | 1440  | 5/300 |
| LC144246565 | 14,4 | 24V  | 6500 | 1440  | 5/300 |
| LC14424BL65 | 14,4 | 24V  |      | 1200  | 5/300 |
| LC14424GR65 | 14,4 | 24V  |      | 1200  | 5/300 |
| LC14424RE65 | 14,4 | 24V  |      | 1200  | 5/300 |
| LC14424YE65 | 14,4 | 24V  |      | 1200  | 5/300 |



# LED Strips Dot COB

**GEYER**

**5** Years  
Warranty

**RA90**

LED Strip 14.4W 24V IP33 DOT COB





| CODE         | WATT | VOLT | CCT  | LUMEN |       |
|--------------|------|------|------|-------|-------|
| LDC144242733 | 14,4 | 24V  | 2700 | 1440  | 5/300 |
| LDC144243033 | 14,4 | 24V  | 3000 | 1440  | 5/300 |
| LDC144244033 | 14,4 | 24V  | 4000 | 1440  | 5/300 |
| LDC144246533 | 14,4 | 24V  | 6500 | 1440  | 5/300 |



**5** Years  
Warranty

**RA90**

LED Strip 14.4W 24V IP65 DOT COB



| CODE         | WATT | VOLT | CCT  | LUMEN |       |
|--------------|------|------|------|-------|-------|
| LDC144242765 | 14,4 | 24V  | 2700 | 1440  | 5/300 |
| LDC144243065 | 14,4 | 24V  | 3000 | 1440  | 5/300 |
| LDC144244065 | 14,4 | 24V  | 4000 | 1440  | 5/300 |
| LDC144246565 | 14,4 | 24V  | 6500 | 1440  | 5/300 |



# LED Strips 4in1 & 5in1


**GEYER**

**5** Years  
Warranty

**RA90**



LED Strip 14.4W 24V 4in1




| CODE          | WATT | VOLT | CCT  | IP | LUMEN |       |
|---------------|------|------|------|----|-------|-------|
| LP14424RGBW33 | 14.4 | 24V  | RGBW | 33 | 1000  | 5/300 |
| LP14424RGBW65 | 14.4 | 24V  | RGBW | 65 | 1000  | 5/300 |

**5** Years  
Warranty

**RA90**



LED Strip 16W 24V 5in1



| CODE          | WATT | VOLT | CCT   | IP | LUMEN |       |
|---------------|------|------|-------|----|-------|-------|
| LP1624WRGBW33 | 16   | 24V  | WRGBW | 33 | 1000  | 5/300 |
| LP1624WRGBW65 | 16   | 24V  | WRGBW | 65 | 1000  | 5/300 |






**5** Years  
Warranty



Neon LED strip 24V 6x12mm




120° dimmable SMD 2835 IP67 RA ≥70 -25 | +45 °C 30.000h

| CODE       | WATT                           | VOLT | CCT   | LUMEN |   |
|------------|--------------------------------|------|-------|-------|---|
| LN14461230 | 14.4                           | 24V  | 3000K | 1400  | 5 |
| LN144612R  | 14.4                           | 24V  | ●     | 1400  | 5 |
| LN144612G  | 14.4                           | 24V  | ●     | 1400  | 5 |
| LN144612B  | 14.4                           | 24V  | ●     | 1400  | 5 |
| LNA011     | 2x Clips for 6x12mm + End caps |      |       |       |   |

**5** Years  
Warranty



Neon LED strip 24V 6x13mm

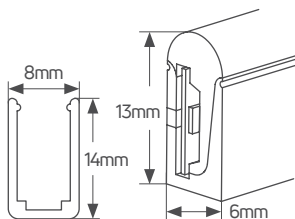


120° dimmable SMD 2835 IP67 RA ≥70 -25 | +45 °C 30.000h

| CODE   | WATT                                   | VOLT | CCT   | LUMEN |   |
|--------|----------------------------------------|------|-------|-------|---|
| 139145 | 14.4                                   | 24V  | 3000K | 1400  | 5 |
| 139169 | 14.4                                   | 24V  | 4000K | 1400  | 5 |
| 139176 | 14.4                                   | 24V  | ●     | 1400  | 5 |
| 139381 | Clips and End caps for Neon LED 6x13mm |      |       |       |   |

**5** Years  
Warranty



Neon LED strip 24V 10x10mm

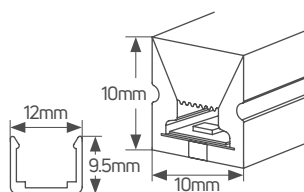


120° dimmable SMD 2835 IP67 RA ≥70 -25 | +45 °C 30.000h

| CODE   | WATT                                    | VOLT | CCT   | LUMEN |   |
|--------|-----------------------------------------|------|-------|-------|---|
| 139114 | 14.4                                    | 24V  | 3000K | 1400  | 5 |
| 139121 | 14.4                                    | 24V  | 4000K | 1400  | 5 |
| 139138 | 14.4                                    | 24V  | ●     | 1400  | 5 |
| 139374 | Clips and End caps for Neon LED 10x10mm |      |       |       |   |

**5** Years Warranty



Neon LED strip 24V 10x23mm

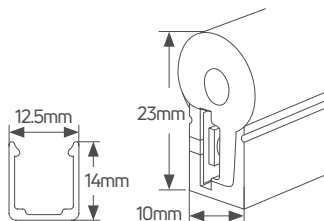


| CODE        | WATT                            | VOLT | CCT   | LUMEN |   |
|-------------|---------------------------------|------|-------|-------|---|
| LN144951830 | 14.4                            | 24V  | 3000K | 1400  | 5 |
| LN1449518R  | 14.4                            | 24V  |       | 1400  | 5 |
| LN1449518G  | 14.4                            | 24V  |       | 1400  | 5 |
| LN1449518B  | 14.4                            | 24V  |       | 1400  | 5 |
| LNA011      | 2x Clips for 10x23mm + End caps |      |       |       |   |

**5** Years Warranty



Neon LED strip 24V 10x23mm

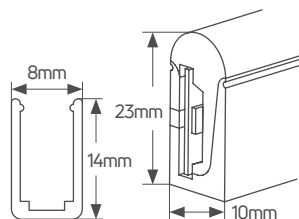


| CODE   | WATT                                    | VOLT | CCT   | LUMEN |   |
|--------|-----------------------------------------|------|-------|-------|---|
| 139183 | 14.4                                    | 24V  | 3000K | 1400  | 5 |
| 139190 | 14.4                                    | 24V  | 4000K | 1400  | 5 |
| 139206 | 14.4                                    | 24V  |       | 1400  | 5 |
| 139398 | Clips and End caps for Neon LED 10x23mm |      |       |       |   |

**5** Years Warranty



Neon LED strip 24V ø13mm



| CODE   | WATT                                  | VOLT | CCT   | LUMEN |   |
|--------|---------------------------------------|------|-------|-------|---|
| 139213 | 14.4                                  | 24V  | 3000K | 1400  | 5 |
| 139220 | 14.4                                  | 24V  | 4000K | 1400  | 5 |
| 139237 | 14.4                                  | 24V  |       | 1400  | 5 |
| 139404 | Clips and End caps for Neon LED ø13mm |      |       |       |   |


IP40  -20|+60 °C**3** Years  
Warranty

| CODE  | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |  |
|-------|------|----------------|----------------|-------------------------------------------------------------------------------------|
| LD12P | 12   | 12V DC         | 1A             | 1/200                                                                               |
| LD24P | 24   | 12V DC         | 2A             | 1/150                                                                               |
| LD36P | 36   | 12V DC         | 3A             | 1/120                                                                               |
| LD72P | 72   | 12V DC         | 6A             | 1/40                                                                                |

IP40  -20|+60 °C**3** Years  
Warranty

| CODE     | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |  |
|----------|------|----------------|----------------|---------------------------------------------------------------------------------------|
| LD24P-24 | 24   | 24V DC         | 1A             | 1/150                                                                                 |
| LD72P-24 | 72   | 24V DC         | 3A             | 1/40                                                                                  |

**3** Years  
Warranty




**IP20**

**220-240**  
VAC

**-20 | +60 °C**

| CODE     | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|----------|------|----------------|----------------|---|
| LD122520 | 25   | 12V DC         | 2A             | 1 |
| LD242520 | 25   | 24V DC         | 1A             | 1 |

**3** Years  
Warranty




**IP20**

**220-240**  
VAC

**-20 | +60 °C**

| CODE     | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|----------|------|----------------|----------------|---|
| LD126020 | 60   | 12V DC         | 5A             | 1 |
| LD244820 | 48   | 24V DC         | 2A             | 1 |

**3** Years  
Warranty




**IP20**

**220-240**  
VAC

**-20 | +60 °C**

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|-----------|------|----------------|----------------|---|
| LD1210020 | 100  | 12V DC         | 8A             | 1 |
| LD247520  | 75   | 24V DC         | 3A             | 1 |


**3** Years  
Warranty



**IP20** ⚡ 220-240 VAC 🌡️ -20 | +60 °C

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT | 📦 |
|-----------|------|----------------|----------------|---|
| LD1215020 | 150  | 12V DC         | 13A            | 1 |
| LD2412020 | 120  | 24V DC         | 5A             | 1 |


**3** Years  
Warranty



**IP20** ⚡ 220-240 VAC 🌡️ -20 | +60 °C

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT | 📦 |
|-----------|------|----------------|----------------|---|
| LD1220020 | 200  | 12V DC         | 17A            | 1 |


**3** Years  
Warranty



**IP20** ⚡ 220-240 VAC 🌡️ -20 | +60 °C

| CODE       | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT | 📦 |
|------------|------|----------------|----------------|---|
| LD1225020F | 250  | 12V DC         | 21A            | 1 |
| LD2424020F | 240  | 24V DC         | 10A            | 1 |


**3** Years  
Warranty



**IP20** ⚡ 220-240 VAC 🌡️ -20 | +60 °C

| CODE       | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT | 📦 |
|------------|------|----------------|----------------|---|
| LD1236020F | 360  | 12V DC         | 30A            | 1 |
| LD2436020F | 360  | 24V DC         | 15A            | 1 |


**3** Years Warranty



**IP67** ⚡ 180-265 VAC 🌡️ -20 | +60 °C

| CODE     | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|----------|------|----------------|----------------|---|
| LD123667 | 36   | 12V DC         | 3A             | 1 |
| LD243667 | 36   | 24V DC         | 1.5A           | 1 |


**3** Years Warranty



**IP67** ⚡ 180-265 VAC 🌡️ -20 | +60 °C

| CODE     | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|----------|------|----------------|----------------|---|
| LD126067 | 60   | 12V DC         | 5A             | 1 |
| LD246067 | 60   | 24V DC         | 2.5A           | 1 |

**3** Years Warranty




**IP67** ⚡ 180-265 VAC 🌡️ -20 | +60 °C

| CODE     | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|----------|------|----------------|----------------|---|
| LD128067 | 80   | 12V DC         | 6.67A          | 1 |
| LD248067 | 80   | 24V DC         | 3.3A           | 1 |

## LED Drivers IP67

**GEYER**


**3** Years  
Warranty



**IP67** ⚡ 180-265 VAC 🌡️ -20 | +60 °C

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|-----------|------|----------------|----------------|---|
| LD1210067 | 100  | 12V DC         | 8.3A           | 1 |
| LD2410067 | 100  | 24V DC         | 4.16A          | 1 |


**3** Years  
Warranty



**IP67** ⚡ 180-265 VAC 🌡️ -20 | +60 °C

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|-----------|------|----------------|----------------|---|
| LD1212067 | 120  | 12V DC         | 10A            | 1 |
| LD2412067 | 120  | 24V DC         | 5A             | 1 |

**3** Years  
Warranty



**IP67** ⚡ 180-265 VAC 🌡️ -20 | +60 °C


| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|-----------|------|----------------|----------------|---|
| LD1215067 | 150  | 12V DC         | 12.5A          | 1 |
| LD2415067 | 150  | 24V DC         | 6.25A          | 1 |



## LED Drivers IP67

**GEYER**

**3** Years Warranty




**IP67**

**180-265**  
VAC

**-20 | +60 °C**

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|-----------|------|----------------|----------------|---|
| LD1220067 | 200  | 12V DC         | 16.5A          | 1 |
| LD2420067 | 200  | 24V DC         | 8.3A           | 1 |

**3** Years Warranty




**IP67**

**180-265**  
VAC

**-20 | +60 °C**

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|-----------|------|----------------|----------------|---|
| LD1225067 | 250  | 12V DC         | 20A            | 1 |
| LD2425067 | 250  | 24V DC         | 10A            | 1 |

**3** Years Warranty



**IP67**

**180-265**  
VAC

**-20 | +60 °C**

| CODE      | WATT | OUTPUT VOLTAGE | OUTPUT CURRENT |   |
|-----------|------|----------------|----------------|---|
| LD1230067 | 300  | 12V DC         | 25A            | 1 |
| LD2430067 | 300  | 24V DC         | 12A            | 1 |

IP20



| CODE    | DESCRIPTION                                   |   |
|---------|-----------------------------------------------|---|
| CC1-8   | Wire with 1 connector for LED Strip 8mm IP20  | 1 |
| CC1-10  | Wire with 1 connector for LED Strip 10mm IP20 | 1 |
| CC1-RGB | Wire with 1 connector for LED Strip RGB IP20  | 1 |

IP20



| CODE    | DESCRIPTION                                    |   |
|---------|------------------------------------------------|---|
| CC2-8   | Wire with 2 connectors for LED Strip 8mm IP20  | 1 |
| CC2-10  | Wire with 2 connectors for LED Strip 10mm IP20 | 1 |
| CC2-RGB | Wire with 2 connectors for LED Strip RGB IP20  | 1 |

IP65



| CODE       | DESCRIPTION                                   |   |
|------------|-----------------------------------------------|---|
| CC1-8-65   | Wire with 1 connector for LED Strip 8mm IP65  | 1 |
| CC1-10-65  | Wire with 1 connector for LED Strip 10mm IP65 | 1 |
| CC1-RGB-65 | Wire with 1 connector for LED Strip RGB IP65  | 1 |

IP65



| CODE       | DESCRIPTION                                    |   |
|------------|------------------------------------------------|---|
| CC2-8-65   | Wire with 2 connectors for LED Strip 8mm IP65  | 1 |
| CC2-10-65  | Wire with 2 connectors for LED Strip 10mm IP65 | 1 |
| CC2-RGB-65 | Wire with 2 connectors for LED Strip RGB IP65  | 1 |

IP20




| CODE     | DESCRIPTION                                         |   |
|----------|-----------------------------------------------------|---|
| C-RGB4-M | Wire with 1 male connector for LED Strip RGB IP20   | 1 |
| C-RGB-F  | Wire with 1 female connector for LED Strip RGB IP65 | 1 |

IP20



| CODE       | DESCRIPTION                                |   |
|------------|--------------------------------------------|---|
| CC1-RGB4-M | Wire with 2 male connectors for RGB IP20   | 1 |
| CC1-RGB-F  | Wire with 2 female connectors for RGB IP20 | 1 |



IP20

| CODE   | DESCRIPTION                               |   |
|--------|-------------------------------------------|---|
| CL-8   | L shape connector for LED Strip 8mm IP20  | 1 |
| CL-10  | L shape connector for LED Strip 10mm IP20 | 1 |
| CL-RGB | L shape connector for LED Strip RGB IP20  | 1 |




IP20

| CODE   | DESCRIPTION                                |   |
|--------|--------------------------------------------|---|
| 139411 | L shape connector for LED Strip RGBW 4in1  | 1 |
| 139428 | L shape connector for LED Strip WRGBW 5in1 | 1 |



IP20

| CODE   | DESCRIPTION                               |   |
|--------|-------------------------------------------|---|
| CT-8   | T shape connector for LED Strip 8mm IP20  | 1 |
| CT-10  | T shape connector for LED Strip 10mm IP20 | 1 |
| CT-RGB | T shape connector for LED Strip RGB IP20  | 1 |

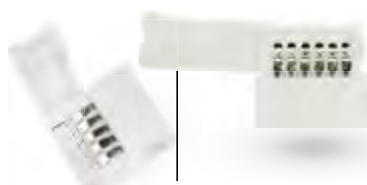

IP20

| CODE   | DESCRIPTION                                |   |
|--------|--------------------------------------------|---|
| 139435 | I shape connector for LED Strip RGBW 4in1  | 1 |
| 139442 | I shape connector for LED Strip WRGBW 5in1 | 1 |



IP20

| CODE   | DESCRIPTION                               |   |
|--------|-------------------------------------------|---|
| C4-8   | X shape connector for LED Strip 8mm IP20  | 1 |
| C4-10  | X shape connector for LED Strip 10mm IP20 | 1 |
| C4-RGB | X shape connector for LED Strip RGB IP20  | 1 |




IP65

| CODE     | DESCRIPTION                       |   |
|----------|-----------------------------------|---|
| C-8-65   | Connector for LED Strip 8mm IP65  | 1 |
| C-10-65  | Connector for LED Strip 10mm IP65 | 1 |
| C-RGB-65 | Connector for LED Strip RGB IP65  | 1 |



| CODE   | DESCRIPTION                                |   |
|--------|--------------------------------------------|---|
| CC3382 | Connector with wire for LED Strip 8mm IP33 | 1 |



| CODE    | DESCRIPTION                                 |   |
|---------|---------------------------------------------|---|
| CC33102 | Connector with wire for LED Strip 10mm IP33 | 1 |



| CODE    | DESCRIPTION                                |   |
|---------|--------------------------------------------|---|
| CC33104 | Connector with wire for LED Strip RGB IP33 | 1 |



| CODE  | DESCRIPTION                               |   |
|-------|-------------------------------------------|---|
| C3382 | Straight Connector for LED Strip 8mm IP33 | 1 |



| CODE   | DESCRIPTION                                |   |
|--------|--------------------------------------------|---|
| C33102 | Straight Connector for LED Strip 10mm IP33 | 1 |



| CODE   | DESCRIPTION                                    |   |
|--------|------------------------------------------------|---|
| C33104 | Straight Connector for LED Strip RGB 10mm IP33 | 1 |



| CODE   | DESCRIPTION                                           |   |
|--------|-------------------------------------------------------|---|
| C33120 | Wire for LED Strip 4.8W, 7.2W, 9.6W, 17.3W IP33 120mm | 1 |




| CODE   | DESCRIPTION                         |   |
|--------|-------------------------------------|---|
| C33144 | Wire for LED Strip 14.4W IP33 120mm | 1 |



| CODE | DESCRIPTION                       |   |
|------|-----------------------------------|---|
| C334 | Wire for LED Strip RGB IP33 120mm | 1 |



| CODE   | DESCRIPTION                                |   |
|--------|--------------------------------------------|---|
| CC5582 | Connector with wire for LED Strip 8mm IP65 | 1 |



| CODE    | DESCRIPTION                                 |   |
|---------|---------------------------------------------|---|
| CC55102 | Connector with wire for LED Strip 10mm IP65 | 1 |



| CODE    | DESCRIPTION                                |   |
|---------|--------------------------------------------|---|
| CC55104 | Connector with wire for LED Strip RGB IP65 | 1 |



| CODE  | DESCRIPTION                               |   |
|-------|-------------------------------------------|---|
| C5582 | Straight Connector for LED Strip 8mm IP65 | 1 |



| CODE   | DESCRIPTION                                |   |
|--------|--------------------------------------------|---|
| C55102 | Straight Connector for LED Strip 10mm IP65 | 1 |



| CODE   | DESCRIPTION                                    |   |
|--------|------------------------------------------------|---|
| C55104 | Straight Connector for LED Strip RGB 10mm IP65 | 1 |



| CODE   | DESCRIPTION                                                  |   |
|--------|--------------------------------------------------------------|---|
| C65200 | Wire for LED Strip 4.8W, 7.2W, 9.6W, 17.3W IP65 / IP68 200mm | 1 |



| CODE   | DESCRIPTION                                |   |
|--------|--------------------------------------------|---|
| C65144 | Wire for LED Strip 14.4W IP65 / IP68 200mm | 1 |



| CODE | DESCRIPTION                              |   |
|------|------------------------------------------|---|
| C654 | Wire for LED Strip RGB IP65 / IP68 150mm | 1 |



| CODE | DESCRIPTION                             |   |
|------|-----------------------------------------|---|
| T688 | Silicone cap set for LED Strip 8mm IP68 | 1 |



| CODE | DESCRIPTION                           |   |
|------|---------------------------------------|---|
| GT68 | Silicone gel for waterproof LED Strip | 1 |





IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE    | DESCRIPTION            | 12V | 24V  |   |
|---------|------------------------|-----|------|---|
| LDM1296 | Monochrome knob dimmer | 96W | 192W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE     | DESCRIPTION      | 12V  | 24V  |   |
|----------|------------------|------|------|---|
| LDM12360 | 360W knob dimmer | 360W | 720W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE     | DESCRIPTION           | 12V | 24V  |   |
|----------|-----------------------|-----|------|---|
| LDRF1296 | Wireless 3 button 30A | 96W | 192W | 1 |

# LED Strips Dimmers

**GEYER**



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE      | DESCRIPTION                              | 12V  | 24V  |   |
|-----------|------------------------------------------|------|------|---|
| LDRF12216 | Wireless touch monotone light controller | 216W | 432W | 1 |



IP20 ⚡ 10,5-16 | 12-24 VDC 🌡️ -20|+60 °C

| CODE     | DESCRIPTION                       | WATT |   |
|----------|-----------------------------------|------|---|
| LDMS1272 | Human body infrared sensor switch | 72   | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE   | DESCRIPTION                            | 12V  | 24V  |   |
|--------|----------------------------------------|------|------|---|
| 139367 | RF dimmer and controller for LED Strip | 360W | 720W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE      | DESCRIPTION                  | 12V  | 24V  |   |
|-----------|------------------------------|------|------|---|
| LDPT12144 | Panel touch monotone lighter | 144W | 288W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20 | +60 °C

| CODE       | DESCRIPTION                                   | 12V  | 24V  |   |
|------------|-----------------------------------------------|------|------|---|
| L24KIR1272 | Infrared aluminum shell 24-key RGB controller | 216W | 432W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20 | +60 °C

| CODE       | DESCRIPTION                                   | 12V  | 24V  |   |
|------------|-----------------------------------------------|------|------|---|
| L44KIR1272 | Infrared aluminum shell 44-key RGB controller | 216W | 432W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20 | +60 °C

| CODE        | DESCRIPTION                                   | 12V  | 24V  |   |
|-------------|-----------------------------------------------|------|------|---|
| L28KRF12144 | Wireless aluminum shell 28-key RGB controller | 144W | 288W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20 | +60 °C

| CODE        | DESCRIPTION                                   | 12V  | 24V  |   |
|-------------|-----------------------------------------------|------|------|---|
| L44KRF12144 | Wireless aluminum shell 44-key RGB controller | 144W | 288W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE       | DESCRIPTION                                 | 12V  | 24V  |   |
|------------|---------------------------------------------|------|------|---|
| LTKRF12288 | 24G network port synchronous RGB controller | 288W | 576W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE       | DESCRIPTION                   | 12V  | 24V  |   |
|------------|-------------------------------|------|------|---|
| LTKRF12216 | Wireless touch RGB controller | 216W | 432W | 1 |



IP20 ⚡ 12-24 VDC 🌡️ -20|+60 °C

| CODE        | DESCRIPTION          | 12V  | 24V  |   |
|-------------|----------------------|------|------|---|
| LRGBPT12216 | Touch RGB controller | 144W | 288W | 1 |



4CHANELL IP20 12-24 VDC -20|+60 °C

| CODE   | DESCRIPTION                | 12V  | 24V  |   |
|--------|----------------------------|------|------|---|
| 139336 | 2.4G Touch RGBW controller | 192W | 384W | 1 |




IP20 12-24 VDC -20|+60 °C

| CODE   | DESCRIPTION                 | 12V  | 24V  |   |
|--------|-----------------------------|------|------|---|
| 139343 | 2.4G Touch WRGBW controller | 240W | 480W | 1 |




3CHANELL IP20 12-24 VDC -20|+60 °C

| CODE   | DESCRIPTION                | 12V  | 24V  |   |
|--------|----------------------------|------|------|---|
| 139350 | 2.4G Touch RGBW controller | 192W | 384W | 1 |




| CODE    | DESCRIPTION                            |   |
|---------|----------------------------------------|---|
| AL502*  | Alu Profile AL502 up to 10mm LED Strip | 2 |
| 502-PC* | Cover for AL502                        | 2 |
| 502-PL  | Inox base for AL502                    | 1 |
| 502-SN  | Snap for AL502                         | 1 |

\*Available in 2 meters profile. The price is per meter




| CODE    | DESCRIPTION                            |   |
|---------|----------------------------------------|---|
| AL601*  | Alu Profile AL601 up to 10mm LED Strip | 2 |
| 601-PC* | Cover for AL601                        | 2 |
| 601-PL  | Inox base for AL601                    | 1 |
| 601-SN  | Snap for AL601                         | 1 |

\*Available in 2 meters profile. The price is per meter



| CODE     | DESCRIPTION                             |   |
|----------|-----------------------------------------|---|
| AL004A*  | Alu Profile AL004A up to 10mm LED Strip | 2 |
| 004A-PC* | Cover for AL004A                        | 2 |
| 004A-PL  | Inox base for AL004A                    | 1 |
| 004A-SN  | Snap for AL004A                         | 1 |


\*Available in 2 meters profile. The price is per meter



| CODE    | DESCRIPTION                            |   |
|---------|----------------------------------------|---|
| AL014*  | Alu Profile AL014 up to 10mm LED Strip | 2 |
| 014-PC* | Cover for AL014                        | 2 |
| 014-PL  | Inox base for AL014                    | 1 |
| 014-SN  | Snap for AL014                         | 1 |


\*Available in 2 meters profile. The price is per meter






| CODE   | DESCRIPTION                            |   |
|--------|----------------------------------------|---|
| AL018* | Alu Profile AL018 up to 10mm LED Strip | 2 |

\*Available in 2 meters profile. The price is per meter




| CODE    | DESCRIPTION                            |   |
|---------|----------------------------------------|---|
| AL019*  | Alu Profile AL019 up to 10mm LED Strip | 2 |
| 019-PC* | Cover for AL019                        | 2 |
| 019-PL  | Inox base for AL019                    | 1 |
| 019-SN  | Snap for AL019                         | 1 |

\*Available in 2 meters profile. The price is per meter




| CODE    | DESCRIPTION                            |   |
|---------|----------------------------------------|---|
| AL024*  | Alu Profile AL024 up to 10mm LED Strip | 2 |
| 024-PC* | Cover for AL024                        | 2 |
| 024-PL  | Inox base for AL024                    | 1 |
| 024-SN  | Snap for AL024                         | 1 |

\*Available in 2 meters profile. The price is per meter




| CODE   | DESCRIPTION                            |   |
|--------|----------------------------------------|---|
| AL026* | Alu Profile AL026 up to 10mm LED Strip | 2 |

\*Available in 2 meters profile. The price is per meter



| CODE    | DESCRIPTION                            |   |
|---------|----------------------------------------|---|
| AL043*  | Alu Profile AL043 up to 10mm LED Strip | 2 |
| 043-PC* | Cover for AL043                        | 2 |
| 043-PL  | Inox base for AL043                    | 1 |
| 043-SN  | Snap for AL043                         | 1 |

\*Available in 2 meters profile. The price is per meter



| CODE    | DESCRIPTION                            |   |
|---------|----------------------------------------|---|
| AL069*  | Alu Profile AL069 up to 10mm LED Strip | 2 |
| 069-PC* | Cover for AL069                        | 2 |
| 069-PL  | Inox base for AL069                    | 1 |
| 069-SN  | Snap for AL069                         | 1 |


\*Available in 2 meters profile. The price is per meter



## Track **Lights**

**5** Years  
Warranty

## Track light 15W

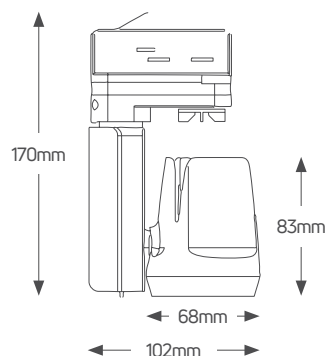

**CRI**  
>90

**CLASS I**

**200-240**  
VAC

**PF>0,9**

**3PHASE**

**-20 | +45 °C**

**40.000h**




| CODE        |   | WATT | BEAMANGLE | CCT  | LUMEN |      |
|-------------|---|------|-----------|------|-------|------|
| LTRW251525B | ● | 15   | 25        | 3000 | 1370  | 1/18 |
| LTRW251545B | ● | 15   | 45        | 3000 | 1370  | 1/18 |
| LTRC251525B | ● | 15   | 25        | 4000 | 1420  | 1/18 |
| LTRC251545B | ● | 15   | 45        | 4000 | 1420  | 1/18 |
| LTRW251525W | ○ | 15   | 25        | 3000 | 1370  | 1/18 |
| LTRW251545W | ○ | 15   | 45        | 3000 | 1370  | 1/18 |
| LTRC251525W | ○ | 15   | 25        | 4000 | 1420  | 1/18 |
| LTRC251545W | ○ | 15   | 45        | 4000 | 1420  | 1/18 |

**5** Years  
Warranty



Track light 25W

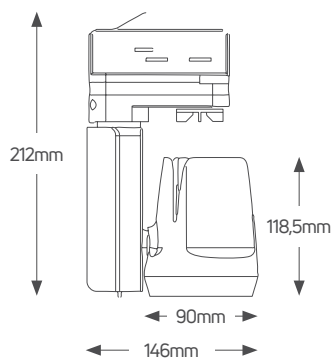


CRI >90 CLASS I 200-240 VAC  
PF>0,9 3PHASE -20 | +45 °C 40.000h

| CODE        |   | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|-------------|---|------|------------|------|-------|------|
| LTRW252515B | ● | 25   | 15         | 3000 | 2430  | 1/12 |
| LTRW252524B | ● | 25   | 24         | 3000 | 2430  | 1/12 |
| LTRW252536B | ● | 25   | 36         | 3000 | 2430  | 1/12 |
| LTRC252515B | ● | 25   | 15         | 4000 | 2520  | 1/12 |
| LTRC252524B | ● | 25   | 24         | 4000 | 2520  | 1/12 |
| LTRC252536B | ● | 25   | 36         | 4000 | 2520  | 1/12 |
| LTRW252515W | ○ | 25   | 15         | 3000 | 2430  | 1/12 |
| LTRW252524W | ○ | 25   | 24         | 3000 | 2430  | 1/12 |
| LTRW252536W | ○ | 25   | 36         | 3000 | 2430  | 1/12 |
| LTRC252515W | ○ | 25   | 15         | 4000 | 2520  | 1/12 |
| LTRC252524W | ○ | 25   | 24         | 4000 | 2520  | 1/12 |
| LTRC252536W | ○ | 25   | 36         | 4000 | 2520  | 1/12 |

**5** Years  
Warranty




## LED Track light 35W

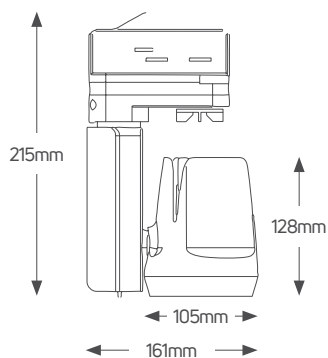

**CRI** >90 **CLASS I** **200-240 VAC**  
**PF>0,9** **3PHASE** **-20 | +45 °C** **40.000h**

| CODE        |   | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|-------------|---|------|------------|------|-------|------|
| LTRW253515B | ● | 35   | 15         | 3000 | 3570  | 1/12 |
| LTRW253524B | ● | 35   | 24         | 3000 | 3570  | 1/12 |
| LTRW253536B | ● | 35   | 36         | 3000 | 3570  | 1/12 |
| LTRC253515B | ● | 35   | 15         | 4000 | 3800  | 1/12 |
| LTRC253524B | ● | 35   | 24         | 4000 | 3800  | 1/12 |
| LTRC253536B | ● | 35   | 36         | 4000 | 3800  | 1/12 |
| LTRW253515W | ○ | 35   | 15         | 3000 | 3570  | 1/12 |
| LTRW253524W | ○ | 35   | 24         | 3000 | 3570  | 1/12 |
| LTRW253536W | ○ | 35   | 36         | 3000 | 3570  | 1/12 |
| LTRC253515W | ○ | 35   | 15         | 4000 | 3800  | 1/12 |
| LTRC253524W | ○ | 35   | 24         | 4000 | 3800  | 1/12 |
| LTRC253536W | ○ | 35   | 36         | 4000 | 3800  | 1/12 |

## LED Track light 45W

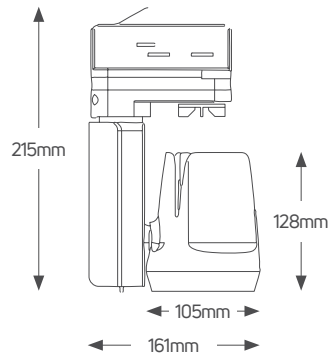

**5** Years  
Warranty



**CRI**  
>90

**CLASS I**

**200-240**  
VAC

**PF>0,9**

**3PHASE**

**-20 | +45 °C**


**40.000h**

| CODE        |   | WATT | BEAMANGLE | CCT  | LUMEN |      |
|-------------|---|------|-----------|------|-------|------|
| LTRW254515B | ● | 45   | 15        | 3000 | 4110  | 1/12 |
| LTRW254524B | ● | 45   | 24        | 3000 | 4110  | 1/12 |
| LTRW254536B | ● | 45   | 36        | 3000 | 4110  | 1/12 |
| LTRC254515B | ● | 45   | 15        | 4000 | 4260  | 1/12 |
| LTRC254524B | ● | 45   | 24        | 4000 | 4260  | 1/12 |
| LTRC254536B | ● | 45   | 36        | 4000 | 4260  | 1/12 |
| LTRW254515W | ○ | 45   | 15        | 3000 | 4110  | 1/12 |
| LTRW254524W | ○ | 45   | 24        | 3000 | 4110  | 1/12 |
| LTRW254536W | ○ | 45   | 36        | 3000 | 4110  | 1/12 |
| LTRC254515W | ○ | 45   | 15        | 4000 | 4260  | 1/12 |
| LTRC254524W | ○ | 45   | 24        | 4000 | 4260  | 1/12 |
| LTRC254536W | ○ | 45   | 36        | 4000 | 4260  | 1/12 |



LED Track light adjustable beam angle 30W

**5** Years  
Warranty



**CRI**  
>90

**200-240**  
VAC


**PF>0,9**


**3PHASE**

**-20 | +45 °C**

**40.000h**

| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| LTRA30WB | 30   | 3000 | 2800  | 1/12 |
| LTRA30CB | 30   | 4000 | 2800  | 1/12 |

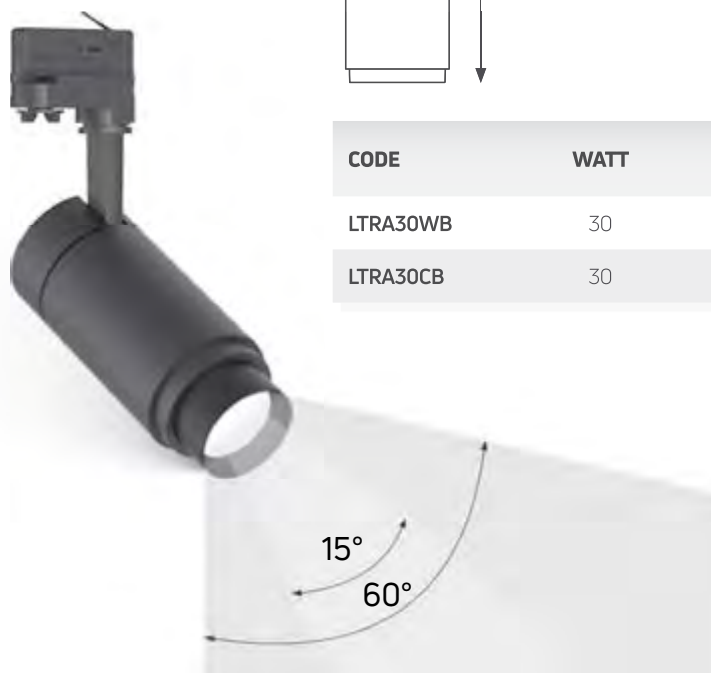


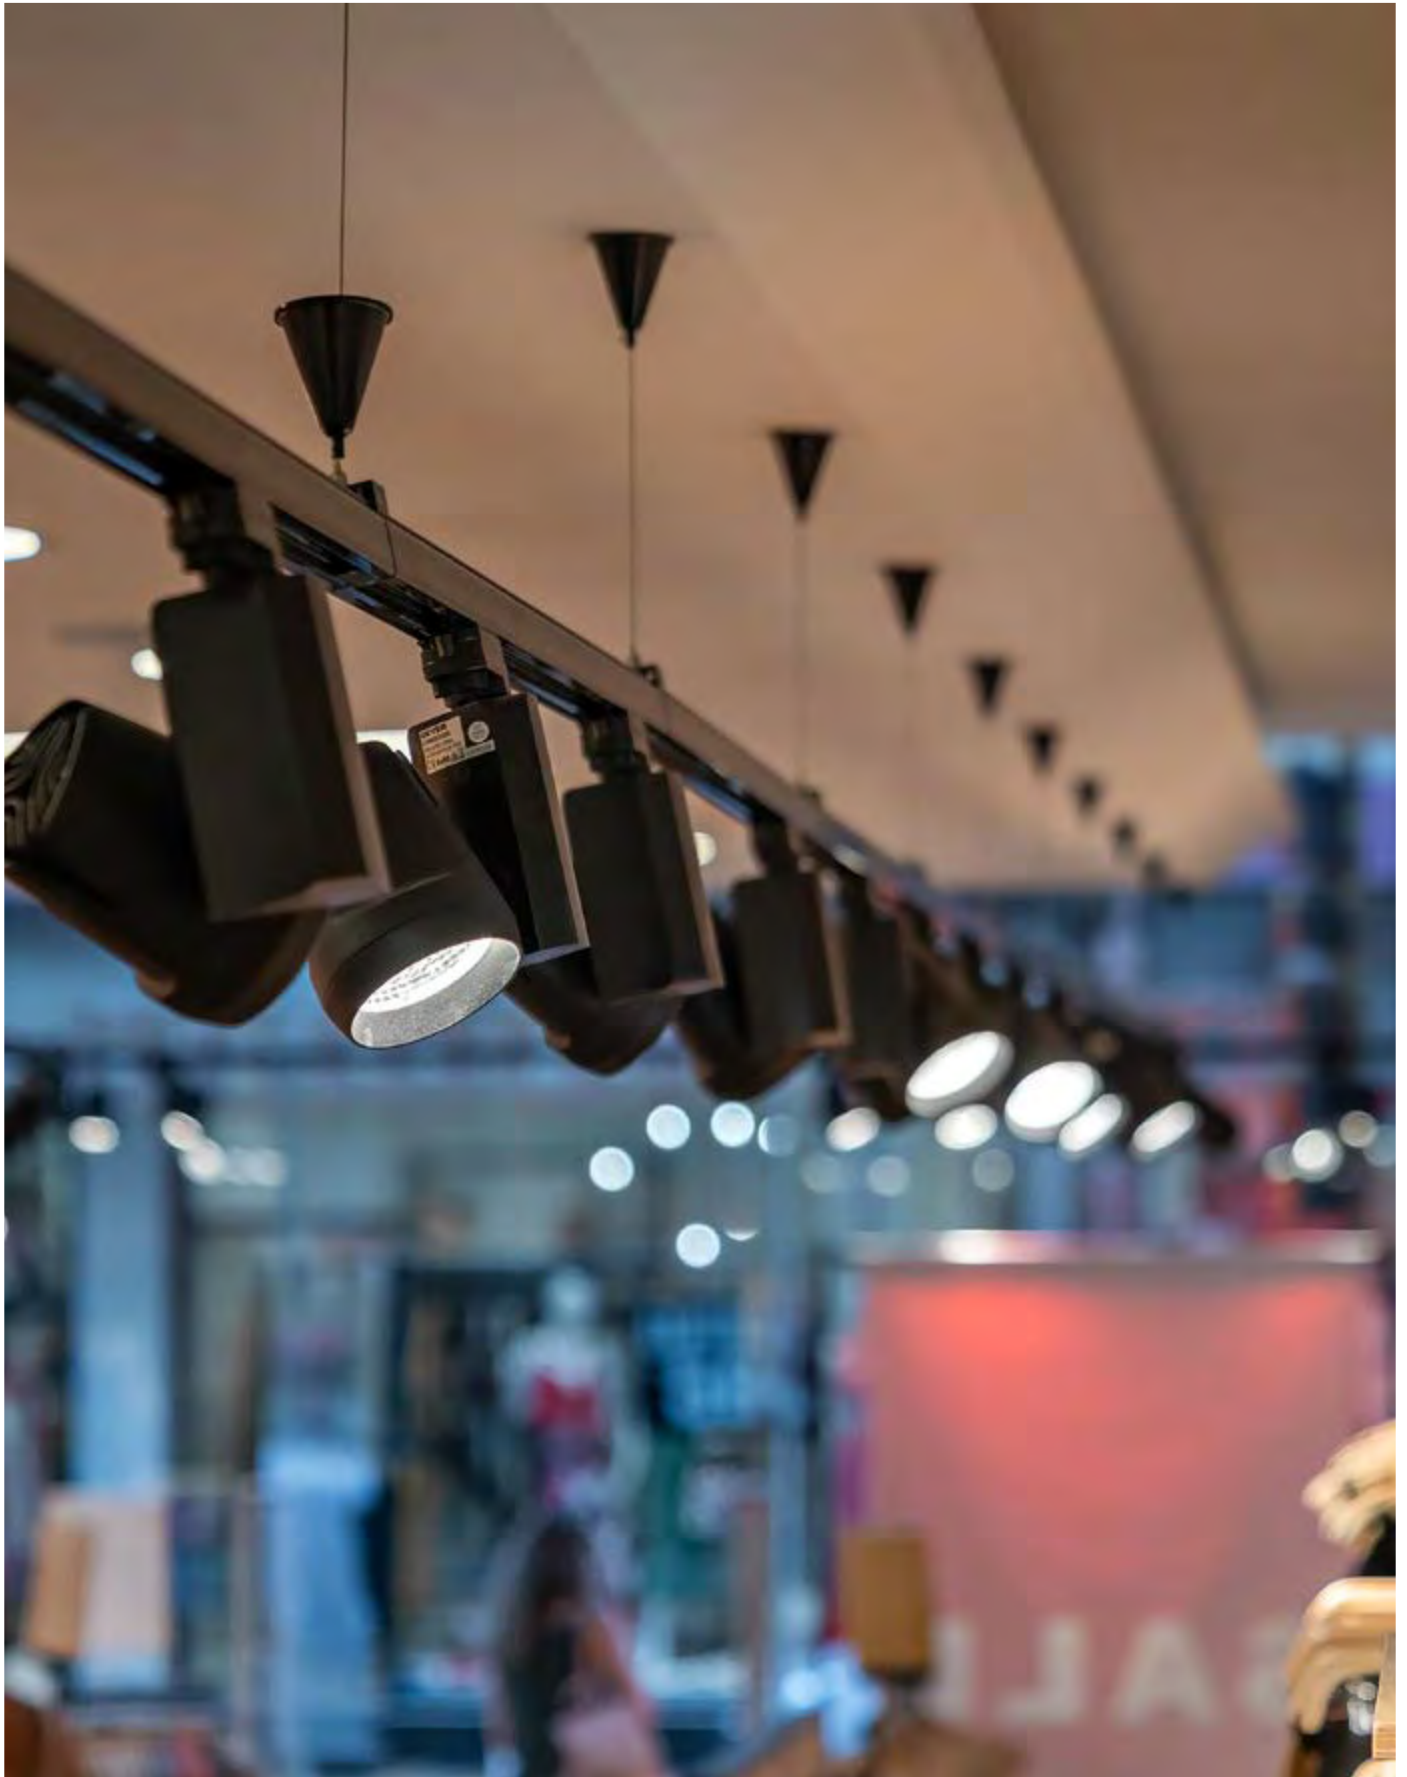

**3** Years  
Warranty



LED Track light 15W

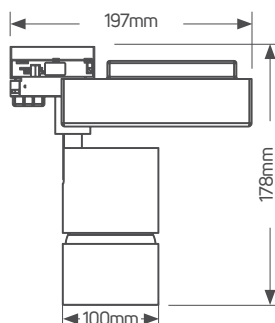


**IP40** **RA >90** **PF>0,9**  
**3PHASE** **-20|+40 °C** **40.000h**

| CODE        |   | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|-------------|---|------|------------|------|-------|------|
| LTR6029-25B | ● | 15   | 25         | 2700 | 1050  | 1/20 |
| LTR6029-40B | ● | 15   | 40         | 2700 | 1050  | 1/20 |
| LTR6029-25W | ○ | 15   | 25         | 2700 | 1050  | 1/20 |
| LTR6029-40W | ○ | 15   | 40         | 2700 | 1050  | 1/20 |

**3** Years  
Warranty



LED Track light 30W

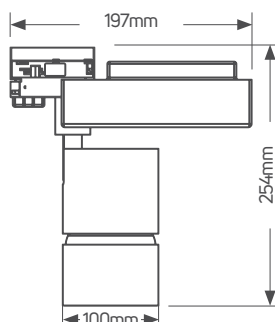


**IP40** **RA >90** **PF>0,9**  
**3PHASE** **-20|+40 °C** **40.000h**

| CODE        |   | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|-------------|---|------|------------|------|-------|------|
| LTR6057-25B | ● | 30   | 25         | 2700 | 2100  | 1/16 |
| LTR6057-40B | ● | 30   | 40         | 2700 | 2100  | 1/16 |
| LTR6057-25W | ○ | 30   | 25         | 2700 | 2100  | 1/16 |
| LTR6057-40W | ○ | 30   | 40         | 2700 | 2100  | 1/16 |

**5** Years  
Warranty

LED Track light 45W

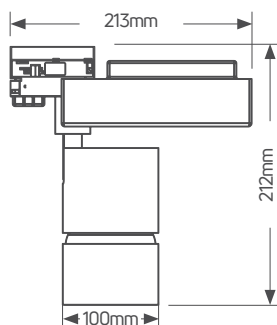


**IP40** **RA >90** **PF >0,9**

**3PHASE** **-20 | +40 °C** **40.000h**




| CODE            |   | WATT | BEAM ANGLE | CCT  | LUMEN |      |
|-----------------|---|------|------------|------|-------|------|
| LTR6027-PLS-25B | ● | 45   | 25         | 2700 | 3150  | 1/10 |
| LTR6027-PLS-40B | ● | 45   | 40         | 2700 | 3150  | 1/10 |
| LTR6027-PLS-25W | ○ | 45   | 25         | 2700 | 3150  | 1/10 |
| LTR6027-PLS-40W | ○ | 45   | 40         | 2700 | 3150  | 1/10 |





230V AC LED E27 MAX 35W 3PHASE

| CODE        |   | DESCRIPTION               |     |
|-------------|---|---------------------------|-----|
| LTR0154E27B | ● | Track light for PAR30/E27 | 1/9 |
| LTR0154E27W | ○ | Track light for PAR30/E27 | 1/9 |



230V AC LED E27 MAX 35W 3PHASE


| CODE        |   | DESCRIPTION               |      |
|-------------|---|---------------------------|------|
| LTR0664E27B | ● | Track light for PAR30/E27 | 1/24 |
| LTR0664E27W | ○ | Track light for PAR30/E27 | 1/24 |



230V AC LED E27 MAX 35W 3PHASE


| CODE        |   | DESCRIPTION               |     |
|-------------|---|---------------------------|-----|
| LTR1194E27B | ● | Track light for PAR30/E27 | 1/9 |
| LTR1194E27W | ○ | Track light for PAR30/E27 | 1/9 |






230V AC LED GU10 MAX 35W 3PHASE

| CODE         |   | DESCRIPTION                |      |
|--------------|---|----------------------------|------|
| LTR0014GU10B | ● | Track light for PAR16/GU10 | 1/50 |
| LTR0014GU10W | ○ | Track light for PAR16/GU10 | 1/50 |




230V AC LED GU10 MAX 35W 3PHASE

| CODE         |   | DESCRIPTION                |      |
|--------------|---|----------------------------|------|
| LTR2114GU10B | ● | Track light for PAR16/GU10 | 1/28 |
| LTR2114GU10W | ○ | Track light for PAR16/GU10 | 1/28 |




230V AC LED GU10 MAX 35W 3PHASE

| CODE         |  | DESCRIPTION                |      |
|--------------|--|----------------------------|------|
| LTR6046GU10B |  | Track light for PAR16/GU10 | 1/20 |
| LTR6046GU10W |  | Track light for PAR16/GU10 | 1/20 |




230V AC LED GU10 MAX 35W 3PHASE

| CODE         |   | DESCRIPTION                |      |
|--------------|---|----------------------------|------|
| LTR1034GU10B | ● | Track light for PAR16/GU10 | 1/25 |
| LTR1034GU10W | ○ | Track light for PAR16/GU10 | 1/25 |



230V AC LED AR111 MAX 35W 3PHASE

| CODE         |   | DESCRIPTION                |      |
|--------------|---|----------------------------|------|
| LTR0674GU10B | ● | Track light for AR111/GU10 | 1/24 |
| LTR0674GU10W | ○ | Track light for AR111/GU10 | 1/24 |




230V AC LED GU10 MAX 35W 3PHASE


| CODE         |   | DESCRIPTION                |      |
|--------------|---|----------------------------|------|
| LTR0854GU10B | ● | Track light for PAR16/GU10 | 1/48 |
| LTR0854GU10W | ○ | Track light for PAR16/GU10 | 1/48 |





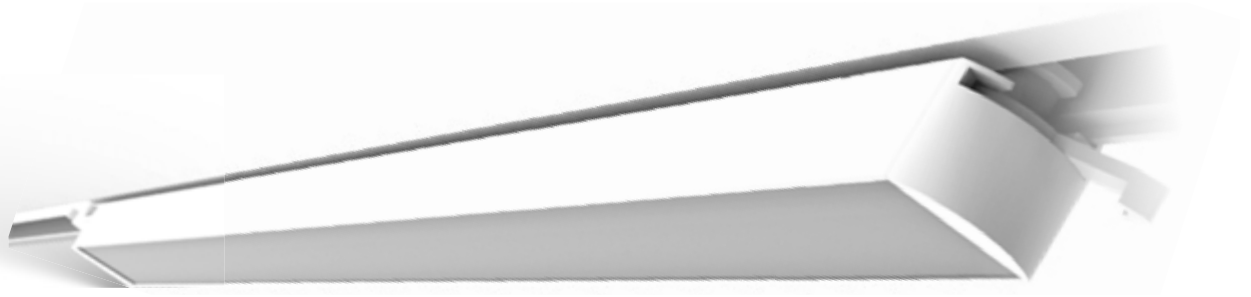

**5** Years  
Warranty



**RA**  
>80


**3PHASE**

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LTRL16WB | ● | 16   | 3000 | 1800  | 1/12 |
| LTRL16CB | ● | 16   | 4000 | 1800  | 1/12 |
| LTRL16WW | ○ | 16   | 3000 | 1800  | 1/12 |
| LTRL16CW | ○ | 16   | 4000 | 1800  | 1/12 |

# Track **Lights**

Accessories for surface/hanging installation

**GEYER**




4WIRE 3PHASE 2 Years Warranty



| CODE  |   | DESCRIPTION                  |     |
|-------|---|------------------------------|-----|
| LTR-B | ● | 3-phase track rail aluminium | 1/8 |
| LTR-W | ○ | 3-phase track rail aluminium | 1/8 |


\*Available in 3 meters Track Rail, can be cut per meter. The price is per meter

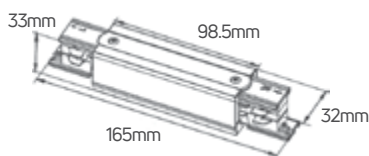

4WIRE 3PHASE 2 Years Warranty



| CODE  |   | DESCRIPTION                |      |
|-------|---|----------------------------|------|
| LTC-B | ● | Straight connector 3-phase | 1/50 |
| LTC-W | ○ | Straight connector 3-phase | 1/50 |

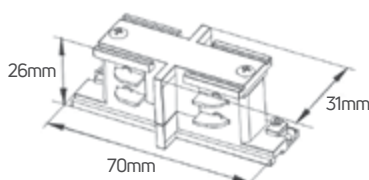

4WIRE 3PHASE 2 Years Warranty




| CODE   |   | DESCRIPTION                |      |
|--------|---|----------------------------|------|
| LTCM-B | ● | Straight connector 3-phase | 1/50 |
| LTCM-W | ○ | Straight connector 3-phase | 1/50 |

# Track **Lights**


Accessories for surface/hanging installation

**GEYER**

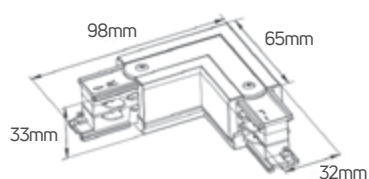


**4WIRE 3PHASE 2 Years Warranty**

| CODE    |   | DESCRIPTION         |      |
|---------|---|---------------------|------|
| LTC-L-B | ● | L connector 3-phase | 1/50 |
| LTC-L-W | ○ | L connector 3-phase | 1/50 |

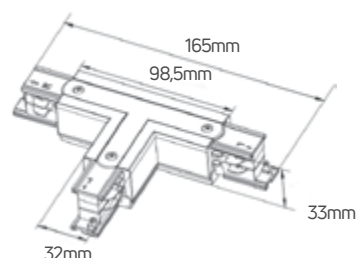

**4WIRE 3PHASE 2 Years Warranty**

| CODE    |   | DESCRIPTION         |      |
|---------|---|---------------------|------|
| LTC-T-B | ● | T connector 3-phase | 1/50 |
| LTC-T-W | ○ | T connector 3-phase | 1/50 |

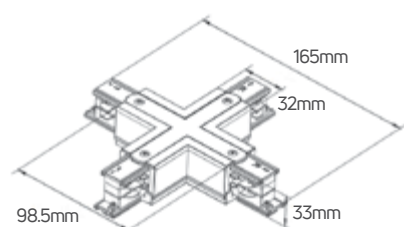


**4WIRE 3PHASE 2 Years Warranty**

| CODE    |   | DESCRIPTION         |      |
|---------|---|---------------------|------|
| LTC-X-B | ● | X connector 3-phase | 1/50 |
| LTC-X-W | ○ | X connector 3-phase | 1/50 |

# Track **Lights**

Accessories for surface/hanging installation


**GEYER**



**4WIRE 3PHASE 2 Years Warranty**




| CODE   |   | DESCRIPTION             |      |
|--------|---|-------------------------|------|
| LTPS-B | ● | AC Power supply 3-phase | 1/50 |
| LTPS-W | ○ | AC Power supply 3-phase | 1/50 |

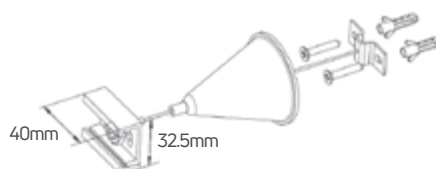

**4WIRE 3PHASE 2 Years Warranty**



| CODE   |   | DESCRIPTION      |       |
|--------|---|------------------|-------|
| LTHC-B | ● | Hanging kit 2.5m | 1/100 |
| LTHC-W | ○ | Hanging kit 2.5m | 1/100 |



**4WIRE 3PHASE 2 Years Warranty**




| CODE   |   | DESCRIPTION            |      |
|--------|---|------------------------|------|
| LTEC-B | ● | End cap for track rail | 1/50 |
| LTEC-W | ○ | End cap for track rail | 1/50 |

# Track **Lights**

Accessories for recessed installation


**GEYER**



4WIRE 3PHASE 2 Years Warranty


| CODE   |   | DESCRIPTION                          |     |
|--------|---|--------------------------------------|-----|
| RLTR-B | ● | Recessed 3-phase track rail aluminum | 1/8 |
| RLTR-W | ○ | Recessed 3-phase track rail aluminum | 1/8 |

**\*Available in 3 meters Track Rail, can be cut per meter. The price is regarding one meter**

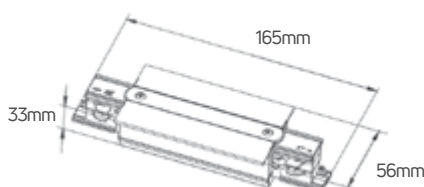

4WIRE 3PHASE 2 Years Warranty

| CODE   |   | DESCRIPTION                         |      |
|--------|---|-------------------------------------|------|
| RLTC-B | ● | Straight recessed connector 3-phase | 1/50 |
| RLTC-W | ○ | Straight recessed connector 3-phase | 1/50 |

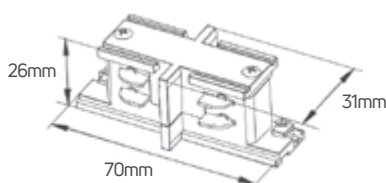

4WIRE 3PHASE 2 Years Warranty


| CODE   |   | DESCRIPTION                              |      |
|--------|---|------------------------------------------|------|
| LTCM-B | ● | Straight recessed connector mini 3-phase | 1/50 |
| LTCM-W | ○ | Straight recessed connector mini 3-phase | 1/50 |



# Track **Lights**


Accessories for recessed installation

**GEYER**




**4WIRE 3PHASE 2 Years Warranty**

| CODE     |   | DESCRIPTION                  |      |
|----------|---|------------------------------|------|
| RLTC-L-B | ● | Recessed L connector 3-phase | 1/50 |
| RLTC-L-W | ○ | Recessed L connector 3-phase | 1/50 |

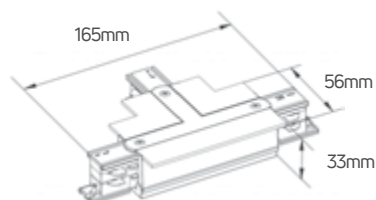

**4WIRE 3PHASE 2 Years Warranty**

| CODE     |   | DESCRIPTION                  |      |
|----------|---|------------------------------|------|
| RLTC-T-B | ● | Recessed T connector 3-phase | 1/25 |
| RLTC-T-W | ○ | Recessed T connector 3-phase | 1/25 |



**4WIRE 3PHASE 2 Years Warranty**


| CODE     |   | DESCRIPTION                  |      |
|----------|---|------------------------------|------|
| RLTC-X-B | ● | Recessed X connector 3-phase | 1/25 |
| RLTC-X-W | ○ | Recessed X connector 3-phase | 1/25 |



# Track Lights

Accessories for recessed installation


**GEYER**



4WIRE 3PHASE 2 Years Warranty



| CODE    |   | DESCRIPTION                      |      |
|---------|---|----------------------------------|------|
| RLTPS-B | ● | Recessed AC Power supply 3-phase | 1/50 |
| RLTPS-W | ○ | Recessed AC Power supply 3-phase | 1/50 |




4WIRE 3PHASE 2 Years Warranty




| CODE   |   | DESCRIPTION                     |       |
|--------|---|---------------------------------|-------|
| LTEC-B | ● | End cap for track rail recessed | 1/150 |
| LTEC-W | ○ | End cap for track rail recessed | 1/150 |



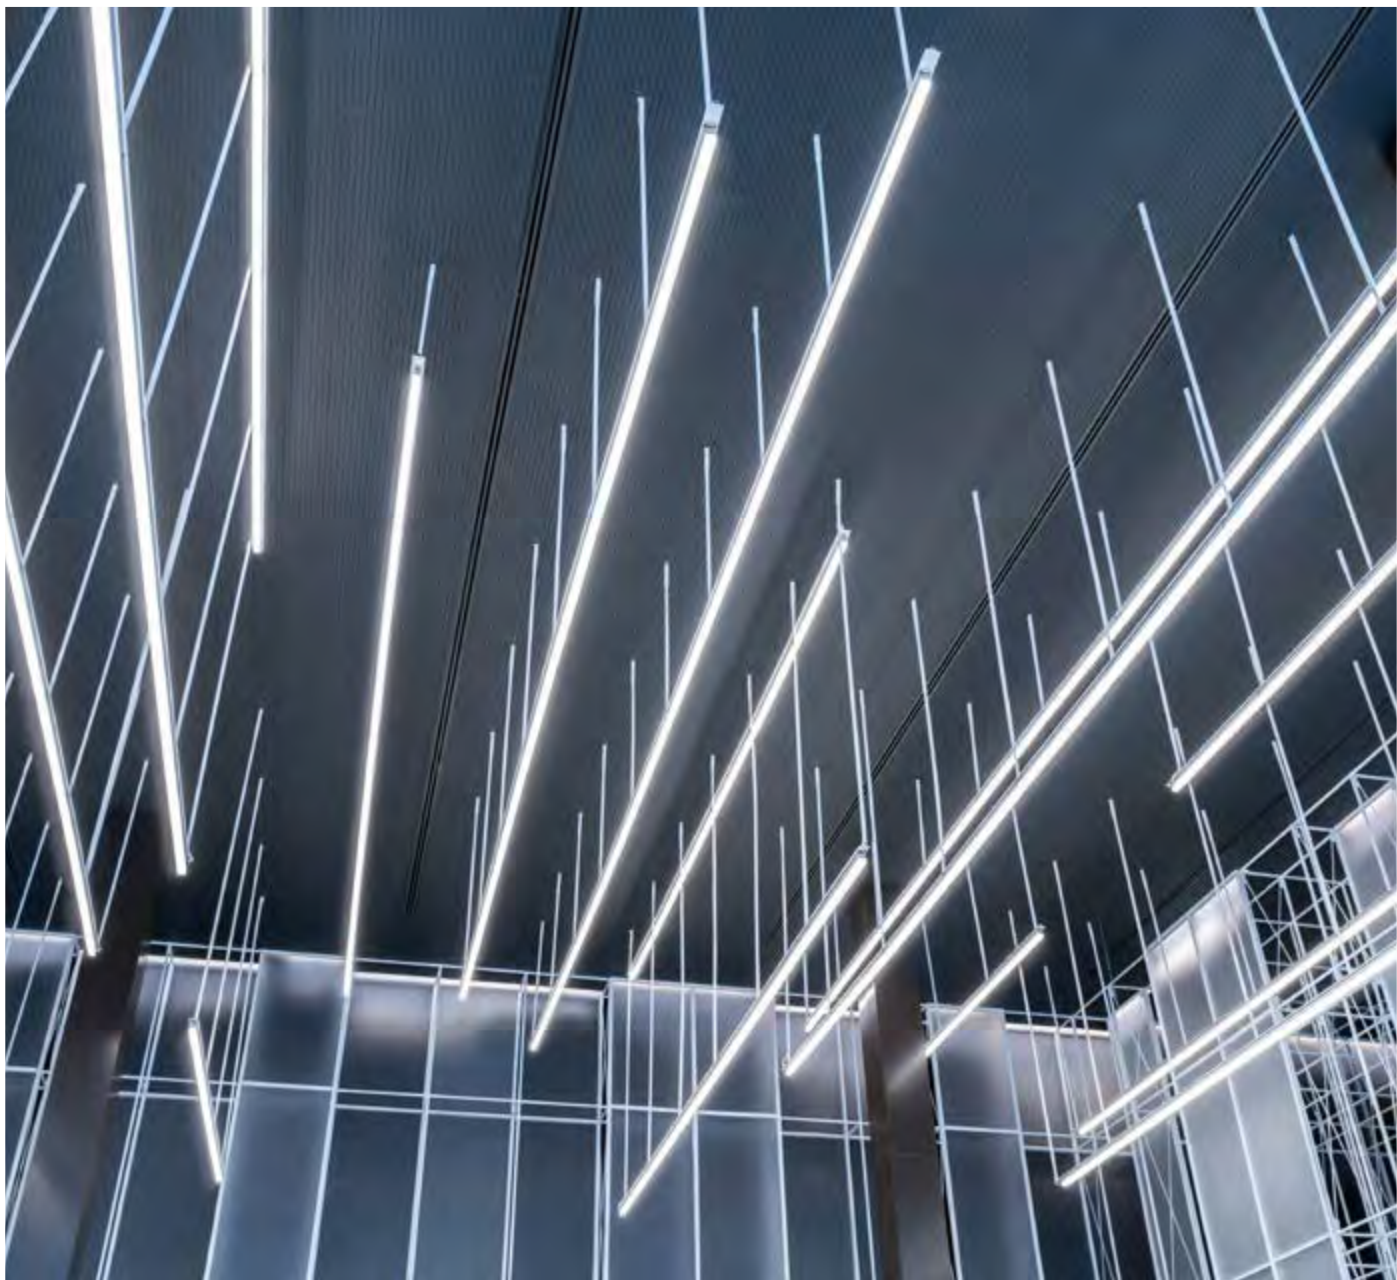

## Linear **Lights**



**5** Years  
Warranty

| CODE        |   | WATT | CCT  | LUMEN |      |
|-------------|---|------|------|-------|------|
| LLUT-0.6WDB | ● | 18   | 3000 | 2250  | 1/12 |
| LLUT-0.6CDB | ● | 18   | 4000 | 2340  | 1/12 |
| LLUT-0.6WDW | ○ | 18   | 3000 | 2250  | 1/12 |
| LLUT-0.6CDW | ○ | 18   | 4000 | 2340  | 1/12 |
| LLUT-0.6WD  | ● | 18   | 3000 | 2250  | 1/12 |
| LLUT-0.6CD  | ● | 18   | 4000 | 2340  | 1/12 |

**Tools for surface mounting and hanging included**



**5** Years  
Warranty

| CODE        |   |   | WATT | CCT  | LUMEN |      |
|-------------|---|---|------|------|-------|------|
| LLUT-1.2WDB | E | ● | 30   | 3000 | 3750  | 1/12 |
| LLUT-1.2CDB | E | ● | 30   | 4000 | 3900  | 1/12 |
| LLUT-1.2WDW | E | ○ | 30   | 3000 | 3750  | 1/12 |
| LLUT-1.2CDW | E | ○ | 30   | 4000 | 3900  | 1/12 |
| LLUT-1.2WD  | E | ● | 30   | 3000 | 3750  | 1/12 |
| LLUT-1.2CD  | E | ● | 30   | 4000 | 3900  | 1/12 |

**Tools for surface mounting and hanging included**






**5** Years  
Warranty

| CODE        |   |   | WATT | CCT  | LUMEN |      |
|-------------|---|---|------|------|-------|------|
| LLUT-1.5WDB | E | ● | 50   | 3000 | 6250  | 1/12 |
| LLUT-1.5CDB | E | ● | 50   | 4000 | 6500  | 1/12 |
| LLUT-1.5WDW | E | ○ | 50   | 3000 | 6250  | 1/12 |
| LLUT-1.5CDW | E | ○ | 50   | 4000 | 6500  | 1/12 |
| LLUT-1.5WD  | E | ● | 50   | 3000 | 6250  | 1/12 |
| LLUT-1.5CD  | E | ● | 50   | 4000 | 6500  | 1/12 |

**Tools for surface mounting and hanging included**



LED Line Recessed 40W 1.2m

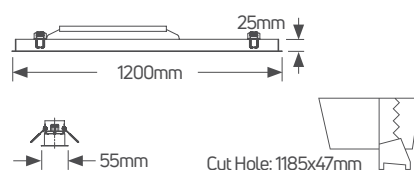


**5** Years  
Warranty

| CODE        |   |   | WATT | CCT  | LUMEN |      |
|-------------|---|---|------|------|-------|------|
| LLRT-1.2WD  | F | ● | 40   | 3000 | 4000  | 1/12 |
| LLRT-1.2CD  | F | ● | 40   | 4000 | 4200  | 1/12 |
| LLRT-1.2WDB | F | ● | 40   | 3000 | 4000  | 1/12 |
| LLRT-1.2CDB | F | ● | 40   | 4000 | 4200  | 1/12 |





LED Line Recessed 50W 1.5m

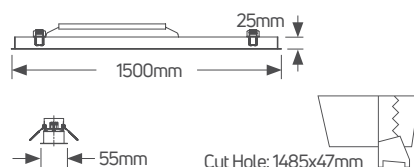

130°  
 dimmable 0-10V  
**IP20**  
**MAX8pcs**  
**RA** >80  
**PF** >0,9  
 -20 | +40 °C  
 50.000h

**5** Years Warranty


| CODE        |  |  | WATT | CCT  | LUMEN |      |
|-------------|--|--|------|------|-------|------|
| LLRT-1.5WD  |  |  | 50   | 3000 | 5000  | 1/12 |
| LLRT-1.5CD  |  |  | 50   | 4000 | 5250  | 1/12 |
| LLRT-1.5WDB |  |  | 50   | 3000 | 5000  | 1/12 |
| LLRT-1.5CDB |  |  | 50   | 4000 | 5250  | 1/12 |

## PC Cover


| CODE | DESCRIPTION                        |      |
|------|------------------------------------|------|
| LLR5 | PC Cover for Line Recessed 5M/roll | 1/12 |




## LED Mirror Lights




| CODE   |                                                                                                                                                                     | DESCRIPTION                               |      |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|------|
| 178854 |   | LED Mirror light 5W 4000K 500lm IP44 0.3m | 1/10 |




| CODE   |                                                                                                                                                                         | DESCRIPTION                               |      |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|------|
| 178861 |   | LED Mirror light 7W 4000K 700lm IP44 0.5m | 1/10 |




| CODE   | DESCRIPTION                                      |      |
|--------|--------------------------------------------------|------|
| 178878 | LED Mirror light 5W 4000K 300lm IP44 0.3m silver | 1/20 |



| CODE   | DESCRIPTION                                 |      |
|--------|---------------------------------------------|------|
| 178885 | LED Mirror light 10W 4000K 600lm IP44 560mm | 1/10 |



| CODE   |                                                                                                                                                                     | DESCRIPTION                                |      |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|
| 178892 |   | LED Mirror light 5W 4000K 300lm IP44 300mm | 1/20 |




| CODE   |                                                                                                                                                                         | DESCRIPTION                                |      |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|
| 178908 |   | LED Mirror light 8W 4000K 450lm IP44 600mm | 1/25 |



## Spots


# Spots

**GEYER**




**GU10** **MAX**  
25W

| CODE  | DESCRIPTION                |       |
|-------|----------------------------|-------|
| SP60N | Round spot Chrome for GU10 | 1/100 |




**GU10** **MAX**  
25W

| CODE   | DESCRIPTION               |       |
|--------|---------------------------|-------|
| SP60NM | Round spot Satin for GU10 | 1/100 |




**GU10** **MAX**  
25W

| CODE  | DESCRIPTION               |       |
|-------|---------------------------|-------|
| SP60W | Round spot White for GU10 | 1/100 |



**GU10** **MAX**  
25W


| CODE   | DESCRIPTION               |       |
|--------|---------------------------|-------|
| SP60BL | Round spot Black for GU10 | 1/100 |



**GU10** **MAX**  
25W


| CODE  | DESCRIPTION              |       |
|-------|--------------------------|-------|
| SP60G | Round spot Gold for GU10 | 1/100 |






**GU10** **MAX**  
25W

| CODE   | DESCRIPTION                 |       |
|--------|-----------------------------|-------|
| SPS60N | Square spot Chrome for GU10 | 1/100 |




**GU10** **MAX**  
25W

| CODE    | DESCRIPTION                |       |
|---------|----------------------------|-------|
| SPS60NM | Square spot Satin for GU10 | 1/100 |





**GU10** **MAX**  
25W

| CODE   | DESCRIPTION                |       |
|--------|----------------------------|-------|
| SPS60W | Square spot White for GU10 | 1/100 |



**GU10** **MAX**  
25W

| CODE    | DESCRIPTION                |       |
|---------|----------------------------|-------|
| SPS60BL | Square spot Black for GU10 | 1/100 |




**GU10** **MAX**  
25W

| CODE   | DESCRIPTION               |       |
|--------|---------------------------|-------|
| SPS60G | Square spot Gold for GU10 | 1/100 |


# Spots Adjustable

**GEYER**




**GU10** **MAX**  
25W

| CODE   | DESCRIPTION                                                                       |                                       |       |
|--------|-----------------------------------------------------------------------------------|---------------------------------------|-------|
| SP78MN |  | Adjustable round spot Chrome for GU10 | 1/100 |





**GU10** **MAX**  
25W

| CODE    | DESCRIPTION                                                                       |                                      |       |
|---------|-----------------------------------------------------------------------------------|--------------------------------------|-------|
| SP78MNM |  | Adjustable round spot Satin for GU10 | 1/100 |




**GU10** **MAX**  
25W

| CODE   | DESCRIPTION                                                                         |                                      |       |
|--------|-------------------------------------------------------------------------------------|--------------------------------------|-------|
| SP78MW |  | Adjustable round spot White for GU10 | 1/100 |

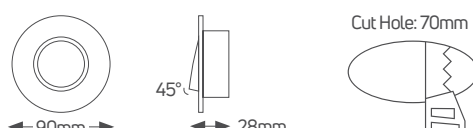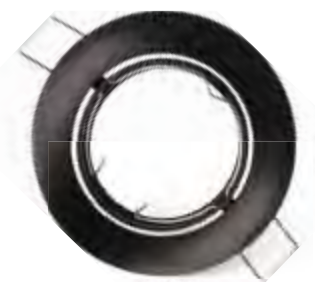


**GU10** **MAX**  
25W

| CODE    | DESCRIPTION                                                                         |                                      |       |
|---------|-------------------------------------------------------------------------------------|--------------------------------------|-------|
| SP78MBL |  | Adjustable round spot Black for GU10 | 1/100 |

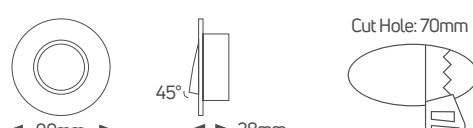


**GU10** **MAX**  
25W

| CODE   | DESCRIPTION                                                                         |                                     |       |
|--------|-------------------------------------------------------------------------------------|-------------------------------------|-------|
| SP78MG |  | Adjustable round spot Gold for GU10 | 1/100 |

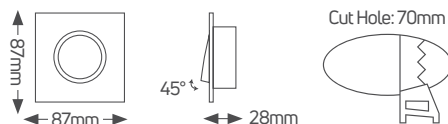


**GU10** **MAX**  
25W

| CODE    | DESCRIPTION                            |       |
|---------|----------------------------------------|-------|
| SPS78MN | Adjustable square spot Chrome for GU10 | 1/100 |

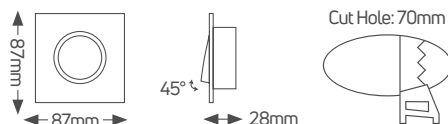


**GU10** **MAX**  
25W

| CODE     | DESCRIPTION                           |       |
|----------|---------------------------------------|-------|
| SPS78MNM | Adjustable square spot Satin for GU10 | 1/100 |

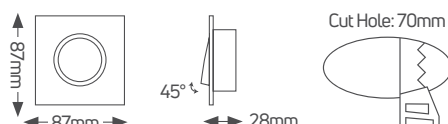


**GU10** **MAX**  
25W

| CODE    | DESCRIPTION                           |       |
|---------|---------------------------------------|-------|
| SPS78MW | Adjustable square spot White for GU10 | 1/100 |

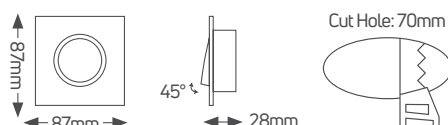

**GU10** **MAX**  
25W

| CODE     | DESCRIPTION                           |       |
|----------|---------------------------------------|-------|
| SPS78MBL | Adjustable square spot Black for GU10 | 1/100 |

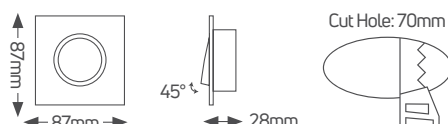

**GU10** **MAX**  
25W


| CODE    | DESCRIPTION                          |       |
|---------|--------------------------------------|-------|
| SPS78MG | Adjustable square spot Gold for GU10 | 1/100 |

# Spots

**GEYER**




Cut Hole: 75mm




**IP54 GU10 MAX 25W**

| CODE     |   | DESCRIPTION |       |
|----------|---|-------------|-------|
| SPW75MW  | ○ | White Spot  | 1/100 |
| SPW75MN  | ● | Chrome Spot | 1/100 |
| SPW75MNM | ● | Nikel Spot  | 1/100 |




Cut Hole: 65mm




**IP20 GU10 MAX 25W**

| CODE   |   | DESCRIPTION    |       |
|--------|---|----------------|-------|
| SPR65B | ● | Round spot R65 | 1/100 |
| SPR65W | ○ | Round spot R65 | 1/100 |




Cut Hole: 65mm




**IP44 GU10 MAX 25W**

| CODE      |   | DESCRIPTION    |      |
|-----------|---|----------------|------|
| SPR44G65B | ● | Round spot R65 | 1/50 |
| SPR44G65W | ○ | Round spot R65 | 1/50 |



Cut Hole: 65mm





**IP20 GU10 MAX 25W**

| CODE     |   | DESCRIPTION     |       |
|----------|---|-----------------|-------|
| SPRAC65B | ● | Round spot AC65 | 1/100 |
| SPRAC65W | ○ | Round spot AC65 | 1/100 |



# Spots

**GEYER**





**IP20 GU10 UGR<16 MAX 25W**

| CODE    |   | DESCRIPTION           |       |
|---------|---|-----------------------|-------|
| SPRA65B | ● | Round spot A65 UGR<16 | 1/100 |
| SPRA65W | ○ | Round spot A65 UGR<16 | 1/100 |





**IP20 GU10 MAX 25W**

| CODE   |   | DESCRIPTION     |       |
|--------|---|-----------------|-------|
| SPS65B | ● | Square spot S65 | 1/100 |
| SPS65W | ○ | Square spot S65 | 1/100 |



**IP44 GU10 MAX 25W**

| CODE      |   | DESCRIPTION     |       |
|-----------|---|-----------------|-------|
| SPS44G65B | ● | Square spot G75 | 1/100 |
| SPS44G65W | ○ | Square spot G75 | 1/100 |



**IP20 GU10 MAX 25W**



| CODE    |   | DESCRIPTION     |       |
|---------|---|-----------------|-------|
| SPSG65B | ● | Square spot G75 | 1/100 |
| SPSG65W | ○ | Square spot G75 | 1/100 |



## Mini Spots





**5** Years Warranty



30°  
**IP20**  
220-240 VAC  
**OSRAM** 2835  
**CRI** >90

| CODE   | DESCRIPTION        | WATT | CCT  | LUMEN |      |
|--------|--------------------|------|------|-------|------|
| 303003 | Recessed spot MINI | 2    | 3000 | 140   | 1/50 |
| 303010 | Recessed spot MINI | 2    | 4000 | 140   | 1/50 |



**5** Years Warranty



30°  
**IP20**  
220-240 VAC  
**OSRAM** 2835  
**CRI** >90

| CODE   | DESCRIPTION        | WATT | CCT  | LUMEN |      |
|--------|--------------------|------|------|-------|------|
| 303027 | Recessed spot MINI | 4    | 3000 | 260   | 1/50 |
| 303034 | Recessed spot MINI | 4    | 4000 | 260   | 1/50 |

**5** Years Warranty



30°  
**IP20**  
220-240 VAC  
**OSRAM** 2835  
**CRI** >90



| CODE   | DESCRIPTION        | WATT | CCT  | LUMEN |      |
|--------|--------------------|------|------|-------|------|
| 303041 | Recessed spot MINI | 6    | 3000 | 440   | 1/50 |
| 303058 | Recessed spot MINI | 6    | 4000 | 440   | 1/50 |



## Mini Spots

**GEYER**

**5** Years  
Warranty



30°

**IP20**



**OSRAM**  
2835

**220-240**  
VAC

**CRI**  
>90

| CODE   | DESCRIPTION        | WATT | CCT  | LUMEN |      |
|--------|--------------------|------|------|-------|------|
| 303065 | Recessed spot MINI | 10   | 3000 | 600   | 1/50 |
| 303072 | Recessed spot MINI | 10   | 4000 | 600   | 1/50 |

**5** Years  
Warranty



30°

**IP20**



**OSRAM**  
2835

**220-240**  
VAC

**CRI**  
>90

| CODE   | DESCRIPTION        | WATT | CCT  | LUMEN |      |
|--------|--------------------|------|------|-------|------|
| 303089 | Recessed spot MINI | 20   | 3000 | 1350  | 1/30 |
| 303096 | Recessed spot MINI | 20   | 4000 | 1350  | 1/30 |

**5** Years  
Warranty



30°


**IP20**

**OSRAM**  
2835

**220-240**  
VAC


**CRI**  
>90

| CODE   | DESCRIPTION        | WATT | CCT  | LUMEN |      |
|--------|--------------------|------|------|-------|------|
| 303102 | Recessed spot MINI | 30   | 3000 | 1950  | 1/21 |
| 303119 | Recessed spot MINI | 30   | 4000 | 1950  | 1/21 |




IP20 GU10 MAX 25W

| CODE         |   | DESCRIPTION  |      |
|--------------|---|--------------|------|
| FW60180GU10B | ● | Surface spot | 1/40 |
| FW60180GU10W | ○ | Surface spot | 1/40 |



GU10

| CODE   |   | DESCRIPTION       |      |
|--------|---|-------------------|------|
| 178915 | ○ | Surface spot GU10 | 1/50 |
| 178922 | ● | Surface spot GU10 | 1/50 |




GU10

| CODE   |   | DESCRIPTION                   |      |
|--------|---|-------------------------------|------|
| 179028 | ○ | Surface spot with switch GU10 | 1/40 |
| 179035 | ● | Surface spot with switch GU10 | 1/40 |


# Spots

**GEYER**




**GU10**

| CODE   |   | DESCRIPTION         |      |
|--------|---|---------------------|------|
| 178939 | ○ | Surface spot 2xGU10 | 1/20 |
| 178946 | ● | Surface spot 2xGU10 | 1/20 |

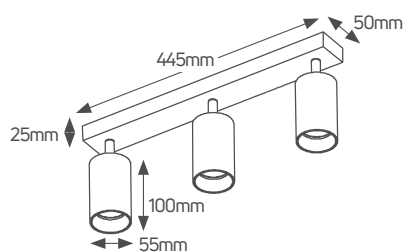


**GU10**

| CODE   |   | DESCRIPTION         |      |
|--------|---|---------------------|------|
| 178953 | ○ | Surface spot 3xGU10 | 1/10 |
| 178960 | ● | Surface spot 3xGU10 | 1/10 |

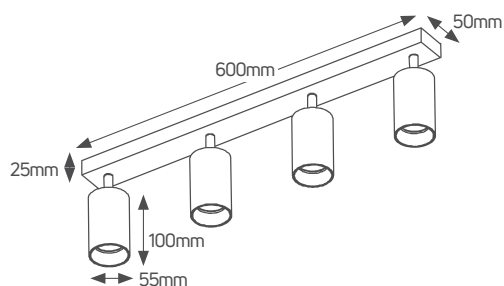

**GU10**

| CODE   |   | DESCRIPTION         |      |
|--------|---|---------------------|------|
| 178991 | ○ | Surface spot 4xGU10 | 1/10 |
| 179004 | ● | Surface spot 4xGU10 | 1/10 |




GU10



| CODE   |   | DESCRIPTION                |      |  |
|--------|---|----------------------------|------|--|
| 178977 | ○ | Surface square spot 4xGU10 | 1/10 |  |
| 178984 | ● | Surface square spot 4xGU10 | 1/10 |  |



**5** Years  
Warranty



36°

**IP40****RA**  
≥90


PF&gt;0,9

-25 | +45 °C

40.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LWAS15WB | ● | 15   | 3000 | 1450  | 1/12 |
| LWAS15CB | ● | 15   | 4000 | 1450  | 1/12 |
| LWAS15WW | ○ | 15   | 3000 | 1450  | 1/12 |
| LWAS15CW | ○ | 15   | 4000 | 1450  | 1/12 |

**5** Years  
Warranty



36°

**IP40****RA**  
≥90

PF&gt;0,9


-25 | +45 °C

40.000h

| CODE     |   | WATT | CCT  | LUMEN |      |
|----------|---|------|------|-------|------|
| LWAS25WB | ● | 25   | 3000 | 2350  | 1/12 |
| LWAS25CB | ● | 25   | 4000 | 2350  | 1/12 |
| LWAS25WW | ○ | 25   | 3000 | 2350  | 1/12 |
| LWAS25CW | ○ | 25   | 4000 | 2350  | 1/12 |

# Spots

**GEYER**




**IP20**

**GU10**

**MAX  
25W**

| CODE     |   | DESCRIPTION                   |      |
|----------|---|-------------------------------|------|
| SPR8084B | ● | Surface round spot adjustable | 1/40 |
| SPR8084W | ○ | Surface round spot adjustable | 1/40 |




**IP20**

**GU10**

**MAX  
25W**

| CODE      |   | DESCRIPTION                   |      |
|-----------|---|-------------------------------|------|
| SPR85115B | ● | Surface round spot adjustable | 1/30 |
| SPR85115W | ○ | Surface round spot adjustable | 1/30 |




**IP20**

**GU10**

**MAX  
25W**

| CODE      |   | DESCRIPTION                   |      |
|-----------|---|-------------------------------|------|
| SPR96125B | ● | Surface round spot adjustable | 1/20 |
| SPR96125W | ○ | Surface round spot adjustable | 1/20 |



IP20

GU10

MAX  
25W



CODE

DESCRIPTION



SPS8084B



Surface square spot adjustable


1/40

SPS8084W



Surface square spot adjustable

1/40



IP20

GU10

MAX  
25W



CODE

DESCRIPTION



SPS96125B



Surface square spot adjustable

1/20


SPS96125W



Surface square spot adjustable


1/20





IP20 GU10 MAX 2x25W

| CODE       |   | DESCRIPTION                          |      |
|------------|---|--------------------------------------|------|
| SPR96125DB | ● | Surface round double spot adjustable | 1/10 |
| SPR96125DW | ○ | Surface round double spot adjustable | 1/10 |



IP20 GU10 MAX 2x25W

| CODE       |   | DESCRIPTION                           |      |
|------------|---|---------------------------------------|------|
| SPS96125DB | ● | Surface square double spot adjustable | 1/10 |
| SPS96125DW | ○ | Surface square double spot adjustable | 1/10 |

# Spots

**GEYER**

## Spot R70



**IP20** **GU10** **MAX**  
16W

| CODE      |   | DESCRIPTION            |      |
|-----------|---|------------------------|------|
| SPR70100B | ● | Surface round spot R70 | 1/20 |
| SPR70100W | ○ | Surface round spot R70 | 1/20 |

**Ring is not included**

## Spot R70




**IP20** **GU10** **MAX**  
16W

| CODE |   | DESCRIPTION  |   |
|------|---|--------------|---|
| R70B | ● | Ring for R70 | 1 |
| R70W | ○ | Ring for R70 | 1 |
| R70Y | ● | Ring for R70 | 1 |



## Spot Trio70




IP20 GU10 MAX 25W

| CODE      |   | DESCRIPTION                |      |
|-----------|---|----------------------------|------|
| SPR70140B | ● | Surface round spot Trio70S | 1/30 |
| SPR70140W | ○ | Surface round spot Trio70S | 1/30 |

Ring is not included

## Spot Trio70



IP20 GU10 MAX 25W

| CODE      |   | DESCRIPTION                |      |
|-----------|---|----------------------------|------|
| SPR70254B | ● | Surface round spot Trio70L | 1/20 |
| SPR70254W | ○ | Surface round spot Trio70L | 1/20 |

Ring is not included


## Spot Trio70

IP20 GU10 MAX 25W

| CODE  |   | DESCRIPTION     |   |
|-------|---|-----------------|---|
| TR70B | ● | Ring for Trio70 | 1 |
| TR70W | ○ | Ring for Trio70 | 1 |
| TR70S | ● | Ring for Trio70 | 1 |
| TR70G | ● | Ring for Trio70 | 1 |
| TR70Y | ● | Ring for Trio70 | 1 |



Spot Trio90




IP20 GU10 MAX 25W

| CODE      |   | DESCRIPTION                |      |
|-----------|---|----------------------------|------|
| SPR90140B | ● | Surface round spot Trio90S | 1/30 |
| SPR90140W | ○ | Surface round spot Trio90S | 1/30 |

Ring is not included



Spot Trio90



IP20 GU10 MAX 25W

| CODE      |   | DESCRIPTION                |      |
|-----------|---|----------------------------|------|
| SPR90254B | ● | Surface round spot Trio90L | 1/20 |
| SPR90254W | ○ | Surface round spot Trio90L | 1/20 |


Ring is not included



Spot Trio90

IP20 GU10 MAX 25W

| CODE  |   | DESCRIPTION     |   |
|-------|---|-----------------|---|
| TR90B | ● | Ring for Trio90 | 1 |
| TR90W | ○ | Ring for Trio90 | 1 |
| TR90S | ● | Ring for Trio90 | 1 |
| TR90G | ● | Ring for Trio90 | 1 |
| TR90Y | ● | Ring for Trio90 | 1 |




IP54 GU10 MAX 25W

| CODE     |   | DESCRIPTION            |      |
|----------|---|------------------------|------|
| SPR6588B | ● | Surface round spot R65 | 1/50 |
| SPR6588W | ○ | Surface round spot R65 | 1/50 |


# Spots

**GEYER**




**IP20 GU10 MAX 25W**

| CODE     |   | DESCRIPTION        |      |
|----------|---|--------------------|------|
| SPR6595B | ● | Surface round spot | 1/50 |
| SPR6595W | ○ | Surface round spot | 1/50 |




**IP20 GU10 MAX 25W**

| CODE         |   | DESCRIPTION        |      |
|--------------|---|--------------------|------|
| FS60130GU10B | ● | Surface round spot | 1/40 |
| FS60130GU10W | ○ | Surface round spot | 1/40 |



**IP20 GU10 UGR<16 MAX 25W**

| CODE       |   | DESCRIPTION             |      |
|------------|---|-------------------------|------|
| SPRA85115B | ● | Surface round spot RA85 | 1/30 |
| SPRA85115W | ○ | Surface round spot RA85 | 1/30 |




**IP20 GU10 UGR<16 MAX 25W**

| CODE    |   | DESCRIPTION           |       |
|---------|---|-----------------------|-------|
| SPR75UB | ● | Round spot R75 UGR<16 | 1/100 |
| SPR75UW | ○ | Round spot R75 UGR<16 | 1/100 |


# Spots

**GEYER**




**IP20 GU10 MAX 25W**

| CODE      |   | DESCRIPTION            |      |
|-----------|---|------------------------|------|
| SPR56130B | ● | Surface round spot R56 | 1/50 |
| SPR56130W | ○ | Surface round spot R56 | 1/50 |




**IP20 GU10 MAX 25W**

| CODE      |   | DESCRIPTION            |      |
|-----------|---|------------------------|------|
| SPR80130B | ● | Surface round spot R80 | 1/40 |
| SPR80130W | ○ | Surface round spot R80 | 1/40 |




**IP20 GU10 MAX 25W**

| CODE      |   | DESCRIPTION             |      |
|-----------|---|-------------------------|------|
| SPS80130B | ● | Surface square spot S80 | 1/40 |
| SPS80130W | ○ | Surface square spot S80 | 1/40 |




Cut Hole: 165x165mm




**IP20 GU10**

| CODE     |   | DESCRIPTION                 |      |
|----------|---|-----------------------------|------|
| SPS1111B | ● | Recessed square spot 1xR111 | 1/60 |
| SPS1111W | ○ | Recessed square spot 1xR111 | 1/60 |




Cut Hole: 315x165mm




**IP20 GU10**

| CODE     |   | DESCRIPTION                 |      |
|----------|---|-----------------------------|------|
| SPS1112B | ● | Recessed square spot 2xR111 | 1/40 |
| SPS1112W | ○ | Recessed square spot 2xR111 | 1/40 |

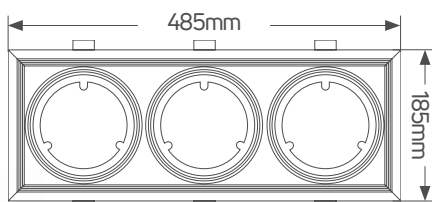

Cut Hole: 465x165mm




**IP20 GU10**

| CODE     |   | DESCRIPTION                 |      |
|----------|---|-----------------------------|------|
| SPS1113B | ● | Recessed square spot 3xR111 | 1/30 |
| SPS1113W | ○ | Recessed square spot 3xR111 | 1/30 |




# Spots

**GEYER**




**G9**

| CODE   |   | DESCRIPTION           |      |
|--------|---|-----------------------|------|
| 178779 | ● | Surface round spot G9 | 1/25 |
| 178786 | ○ | Surface round spot G9 | 1/25 |




**G9**

| CODE   |   | DESCRIPTION          |      |
|--------|---|----------------------|------|
| 178793 | ● | Surface oval spot G9 | 1/25 |
| 178809 | ○ | Surface oval spot G9 | 1/25 |



**G9**

| CODE   |   | DESCRIPTION            |      |
|--------|---|------------------------|------|
| 178816 | ● | Surface square spot G9 | 1/25 |
| 178823 | ○ | Surface square spot G9 | 1/25 |




**G9**

| CODE   |   | DESCRIPTION         |      |
|--------|---|---------------------|------|
| 178830 | ● | Surface square spot | 1/25 |
| 178847 | ○ | Surface square spot | 1/25 |




## Gypsum **Lights**




CLASS II GU10

| CODE    | DESCRIPTION       |      |
|---------|-------------------|------|
| FGC100R | Gypsum round spot | 1/30 |




CLASS II GU10

| CODE    | DESCRIPTION        |      |
|---------|--------------------|------|
| FGS100R | Gypsum square spot | 1/30 |




CLASS II GU10

| CODE     | DESCRIPTION        |      |
|----------|--------------------|------|
| FGS120R1 | Gypsum square spot | 1/24 |




CLASS II GU10

| CODE    | DESCRIPTION       |      |
|---------|-------------------|------|
| FGC130R | Gypsum round spot | 1/24 |




CLASS II GU10

| CODE      | DESCRIPTION               |      |
|-----------|---------------------------|------|
| FGSQ120R2 | Gypsum square spot single | 1/24 |



CLASS II GU10


| CODE       | DESCRIPTION        |      |
|------------|--------------------|------|
| FG215125R2 | Gypsum spot double | 1/12 |



**CLASS II GU10**




| CODE     | DESCRIPTION                          |     |
|----------|--------------------------------------|-----|
| FGS170AR | Gypsum square spot adjustable single | 1/8 |

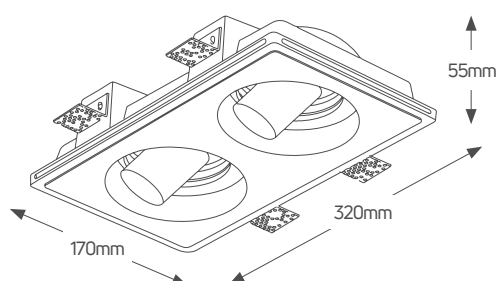

**CLASS II 2xGU10**




| CODE       | DESCRIPTION                   |     |
|------------|-------------------------------|-----|
| FG320170AR | Gypsum spot adjustable double | 1/4 |

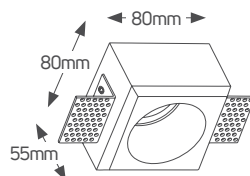

CLASS II **GU10**




| CODE    | DESCRIPTION               |      |
|---------|---------------------------|------|
| FGSQ80R | Gypsum square spot single | 1/24 |



CLASS II **2xGU10**




| CODE     | DESCRIPTION        |      |
|----------|--------------------|------|
| FG15080R | Gypsum spot double | 1/20 |

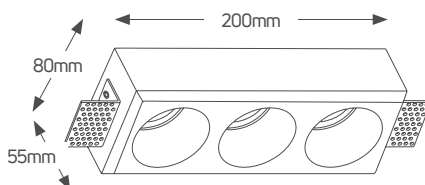

CLASS II **3xGU10**




| CODE     | DESCRIPTION        |      |
|----------|--------------------|------|
| FG20080R | Gypsum spot triple | 1/20 |



**CLASS II GU10**




| CODE    | DESCRIPTION               |     |
|---------|---------------------------|-----|
| FGS190R | Gypsum square spot 1xR111 | 1/8 |

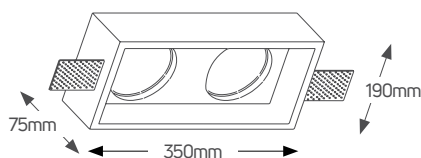

**CLASS II 2xGU10**



| CODE      | DESCRIPTION        |     |
|-----------|--------------------|-----|
| FG350190R | Gypsum spot 2xR111 | 1/4 |

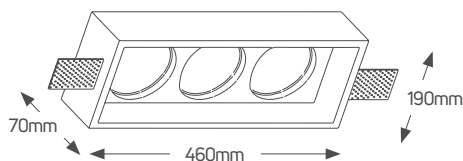


**CLASS II 3xGU10**




| CODE      | DESCRIPTION        |     |
|-----------|--------------------|-----|
| FG460190R | Gypsum spot 3xR111 | 1/4 |






CLASS II GU10

| CODE      | DESCRIPTION               |      |
|-----------|---------------------------|------|
| FGC7090SM | Gypsum round ceiling spot | 1/20 |




CLASS II GU10

| CODE       | DESCRIPTION               |      |
|------------|---------------------------|------|
| FGC70170SM | Gypsum round ceiling spot | 1/12 |




CLASS II GU10

| CODE      | DESCRIPTION                |      |
|-----------|----------------------------|------|
| FGS7090SM | Gypsum square ceiling spot | 1/20 |




**CLASS II GU10**

| CODE       | DESCRIPTION                |      |
|------------|----------------------------|------|
| FGS70170SM | Gypsum square ceiling spot | 1/12 |




**CLASS I 3xGU10**

| CODE        | DESCRIPTION                   |     |
|-------------|-------------------------------|-----|
| FGS240150SM | Gypsum 3x square ceiling spot | 1/6 |




**CLASS I 5xGU10**

| CODE        | DESCRIPTION                   |     |
|-------------|-------------------------------|-----|
| FGS370150SM | Gypsum 5x square ceiling spot | 1/6 |




**CLASS I 2xGU10**

| CODE        | DESCRIPTION                |     |
|-------------|----------------------------|-----|
| FGS310250UD | Gypsum square spot up-down | 1/6 |




**CLASS I 2xGU10**

| CODE        | DESCRIPTION                        |     |
|-------------|------------------------------------|-----|
| FGC310250UD | Gypsum 2x round adjustable spot up | 1/6 |




**CLASS II GU10**

| CODE       | DESCRIPTION      |      |
|------------|------------------|------|
| FGC245110W | Gypsum steplight | 1/12 |




**CLASS II GU10**

| CODE      | DESCRIPTION           |     |
|-----------|-----------------------|-----|
| FG245110W | Gypsum tear steplight | 1/8 |




**CLASS II GU10**

| CODE       | DESCRIPTION            |      |
|------------|------------------------|------|
| FGC180120W | Gypsum round steplight | 1/24 |




**CLASS II GU10**

| CODE    | DESCRIPTION             |     |
|---------|-------------------------|-----|
| FGS120W | Gypsum square steplight | 1/8 |




CLASS I

| CODE    |   | DESCRIPTION               |     |
|---------|---|---------------------------|-----|
| LGC150W | F | LED Gypsum 5W 3000K round | 1/8 |




CLASS I

| CODE    |   | DESCRIPTION                |     |
|---------|---|----------------------------|-----|
| LGC250W | F | LED Gypsum 11W 3000K round | 1/8 |




CLASS I

| CODE    |   | DESCRIPTION                |     |
|---------|---|----------------------------|-----|
| LGC300W | F | LED Gypsum 14W 3000K round | 1/4 |




CLASS I

| CODE    |   | DESCRIPTION                |     |
|---------|---|----------------------------|-----|
| LGS150W | F | LED Gypsum 7W 3000K square | 1/8 |




CLASS I

| CODE    |   | DESCRIPTION                 |     |
|---------|---|-----------------------------|-----|
| LGS250W | F | LED Gypsum 14W 3000K square | 1/8 |




CLASS I

| CODE    |   | DESCRIPTION                 |     |
|---------|---|-----------------------------|-----|
| LGS300W | F | LED Gypsum 18W 3000K square | 1/4 |




CLASS I G9

| CODE     | DESCRIPTION           |      |
|----------|-----------------------|------|
| FGS100UD | Gypsum square up-down | 1/12 |



CLASS I G9


| CODE       | DESCRIPTION          |     |
|------------|----------------------|-----|
| FGS10070UD | Gypsum round up-down | 1/6 |



CLASS I G9


| CODE        | DESCRIPTION              |     |
|-------------|--------------------------|-----|
| FGR230120WL | Gypsum round up-down DOT | 1/6 |






CLASS I G9

| CODE     | DESCRIPTION               |     |
|----------|---------------------------|-----|
| FGS120WL | Gypsum square up-down DOT | 1/6 |





CLASS I G9

| CODE        | DESCRIPTION           |      |
|-------------|-----------------------|------|
| FGS160100UD | Gypsum square up-down | 1/12 |




CLASS I G9

| CODE        | DESCRIPTION           |      |
|-------------|-----------------------|------|
| FGR160100UD | Gypsum curved up-down | 1/12 |

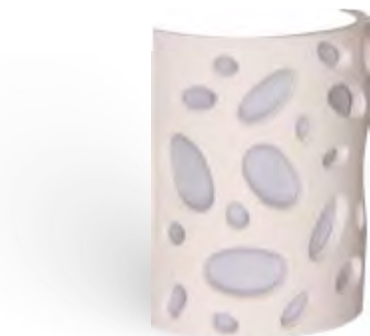


CLASS | E14

| CODE        | DESCRIPTION   |     |
|-------------|---------------|-----|
| FGR235185WL | Gypsum curved | 1/6 |




CLASS | G9

| CODE        | DESCRIPTION     |      |
|-------------|-----------------|------|
| FGR150120UD | Gypsum DOT ball | 1/12 |





CLASS | E14

| CODE        | DESCRIPTION    |     |
|-------------|----------------|-----|
| FGA300170WL | Gypsum up-down | 1/4 |




CLASS I E14

| CODE        | DESCRIPTION                       |     |
|-------------|-----------------------------------|-----|
| FGA370170WL | Gypsum wall mounted up-down round | 1/4 |

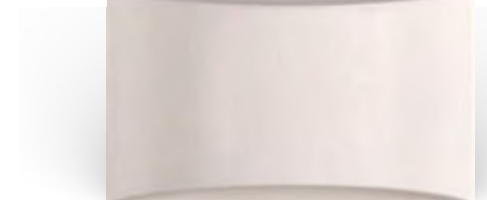


CLASS I G9

| CODE       | DESCRIPTION           |      |
|------------|-----------------------|------|
| FGA20085UD | Gypsum curved up-down | 1/12 |




CLASS I E14

| CODE       | DESCRIPTION            |     |
|------------|------------------------|-----|
| FGA280140U | Gypsum wall mounted up | 1/6 |




CLASS I E14

| CODE        | DESCRIPTION                 |     |
|-------------|-----------------------------|-----|
| FGA245120UD | Gypsum wall mounted up-down | 1/6 |




CLASS | **G9**

| CODE       | DESCRIPTION                |     |
|------------|----------------------------|-----|
| FGA36095UD | Gypsum Recta up-down glass | 1/6 |




CLASS | **E14**

| CODE       | DESCRIPTION              |     |
|------------|--------------------------|-----|
| FG300120WL | Gypsum wall mounted oval | 1/4 |



CLASS | **G9**


| CODE       | DESCRIPTION                |     |
|------------|----------------------------|-----|
| FG180105WL | Gypsum wall mounted square | 1/4 |

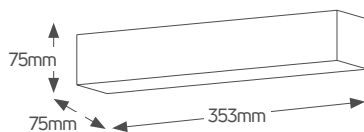

CLASS I 2xG9




| CODE      | DESCRIPTION     |     |
|-----------|-----------------|-----|
| FGA35375U | Gypsum Recta up | 1/8 |



CLASS I 2xG9



| CODE       | DESCRIPTION          |     |
|------------|----------------------|-----|
| FGA35375UD | Gypsum Recta up-down | 1/8 |



CLASS I E14



| CODE        | DESCRIPTION                       |     |
|-------------|-----------------------------------|-----|
| FGA300105UD | Gypsum wall mounted up-down glass | 1/6 |




## Pendant **Lights**

# Pendant Lights

**GEYER**




● Black




120° **IP40** **CRI 80** **CLASS I** **100-277 VAC**  
**PF>0,9** **3 Years Warranty** **-20 | +45 °C** **40.000h**

| CODE      | WATT | CCT  | LUMEN |      |
|-----------|------|------|-------|------|
| LPBW3025W | 25   | 3000 | 1850  | 1/10 |
| LPBW4035W | 35   | 3000 | 2920  | 1/6  |




| CODE           | DESCRIPTION                  |      |
|----------------|------------------------------|------|
| FP60130GU10B ● | Pendant spot with 2.5m cable | 1/40 |
| FP60130GU10W ○ | Pendant spot with 2.5m cable | 1/40 |






**E27**

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PBI3030E27 | ● | Pendant Iron 2.5m cable | 1 |




**E27**

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PGI2525E27 | ● | Pendant Iron 2.5m cable | 1 |




**E27**

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PGI2040E27 | ● | Pendant Iron 2.5m cable | 1 |




**E27**

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PBI2020E27 | ● | Pendant Iron 2.5m cable | 1 |
| PGI2020E27 | ● | Pendant Iron 2.5m cable | 1 |



**E27**

| CODE       |  | DESCRIPTION             |   |
|------------|--|-------------------------|---|
| PGI1330E27 |  | Pendant Iron 2.5m cable | 1 |




**E27**

| CODE       |  | DESCRIPTION             |   |
|------------|--|-------------------------|---|
| PBI2232E27 |  | Pendant Iron 2.5m cable | 1 |


# Pendant Lights

**GEYER**




**E27**

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PBI225E27  | ● | Pendant Iron 2.5m cable | 1 |
| PRGI225E27 | ● | Pendant Iron 2.5m cable | 1 |




**E27**

| CODE     |   | DESCRIPTION                   |   |
|----------|---|-------------------------------|---|
| PBIS2021 | ● | Pendant Iron+Glass 2.5m cable | 1 |
| PBIA2021 | ● | Pendant Iron+Glass 2.5m cable | 1 |



**E27**


| CODE     |   | DESCRIPTION                   |   |
|----------|---|-------------------------------|---|
| PBIS1015 | ● | Pendant Iron+Glass 2.5m cable | 1 |
| PBIA1015 | ● | Pendant Iron+Glass 2.5m cable | 1 |



**E27**




| CODE        |   | DESCRIPTION             |   |
|-------------|---|-------------------------|---|
| PRGI2525E27 | ● | Pendant Iron 2.5m cable | 1 |
| PWI2525E27  | ○ | Pendant Iron 2.5m cable | 1 |



**E27**




| CODE        |   | DESCRIPTION             |   |
|-------------|---|-------------------------|---|
| PRGI3025E27 | ● | Pendant Iron 2.5m cable | 1 |




E27

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PBP1925E27 | ● | Pendant Iron 2.5m cable | 1 |
| PWP1925E27 | ○ | Pendant Iron 2.5m cable | 1 |




E24

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PBP3625E27 | ● | Pendant Iron 2.5m cable | 1 |
| PWP3625E27 | ○ | Pendant Iron 2.5m cable | 1 |




E27

| CODE       |   | DESCRIPTION             |   |
|------------|---|-------------------------|---|
| PBP1725E27 | ● | Pendant Iron 2.5m cable | 1 |
| PWP1725E27 | ○ | Pendant Iron 2.5m cable | 1 |



**E27**


| CODE       | DESCRIPTION                                                                       |                                |  |
|------------|-----------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------|
| PBP2528E27 |  | Pendant Brown Paper 2.5m cable | 1                                                                                   |



**E27**


| CODE       | DESCRIPTION                                                                         |                                |  |
|------------|-------------------------------------------------------------------------------------|--------------------------------|---------------------------------------------------------------------------------------|
| PBP3121E27 |  | Pendant Brown Paper 2.5m cable | 1                                                                                     |






**E27**

| CODE       |   | DESCRIPTION                    |   |
|------------|---|--------------------------------|---|
| PBP4017E27 | ● | Pendant Brown Paper 2.5m cable | 1 |




**E27**

| CODE       |   | DESCRIPTION                    |   |
|------------|---|--------------------------------|---|
| PBP2545E27 | ● | Pendant Brown Paper 2.5m cable | 1 |




E27

| CODE        | DESCRIPTION               |   |
|-------------|---------------------------|---|
| PC150265E27 | Pendant Cement 2.5m cable | 1 |




E27

| CODE        | DESCRIPTION               |   |
|-------------|---------------------------|---|
| PC120140E27 | Pendant Cement 2.5m cable | 1 |




E27

| CODE        | DESCRIPTION               |   |
|-------------|---------------------------|---|
| PC185255E27 | Pendant Cement 2.5m cable | 1 |




E27

| CODE        | DESCRIPTION               |   |
|-------------|---------------------------|---|
| PC100180E27 | Pendant Cement 2.5m cable | 1 |




E27

| CODE        | DESCRIPTION               |   |
|-------------|---------------------------|---|
| PC270140E27 | Pendant Cement 2.5m cable | 1 |




E27

| CODE        | DESCRIPTION               |   |
|-------------|---------------------------|---|
| PC170220E27 | Pendant Cement 2.5m cable | 1 |




**E27**

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6639W | ○ | Pendant Cement 2.5m cable | 1 |




**E27**

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6639P | ● | Pendant Cement 2.5m cable | 1 |




**E27**

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6639G | ● | Pendant Cement 2.5m cable | 1 |




**E27**

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6639B | ● | Pendant Cement 2.5m cable | 1 |




E27

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6640W | ○ | Pendant Cement 2.5m cable | 1 |




E27

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6640G | ● | Pendant Cement 2.5m cable | 1 |




E27

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6640B | ● | Pendant Cement 2.5m cable | 1 |




GU10

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6641W | ○ | Pendant Cement 2.5m cable | 1 |



GU10


| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6641G | ● | Pendant Cement 2.5m cable | 1 |



GU10


| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6641B | ● | Pendant Cement 2.5m cable | 1 |






E27

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6643W | ○ | Pendant Cement 2.5m cable | 1 |




E27

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6643G | ● | Pendant Cement 2.5m cable | 1 |



E27


| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6643P | ● | Pendant Cement 2.5m cable | 1 |



E27

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6644W | ○ | Pendant Cement 2.5m cable | 1 |


**Lamp is not included**



E27

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6644G | ● | Pendant Cement 2.5m cable | 1 |


**Lamp is not included**



E27


| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6644P | ● | Pendant Cement 2.5m cable | 1 |

**Lamp is not included**



**E27**

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6646W | ○ | Pendant Cement 2.5m cable | 1 |




**E27**

| CODE    |   | DESCRIPTION               |   |
|---------|---|---------------------------|---|
| PC6646B | ● | Pendant Cement 2.5m cable | 1 |



## Outdoor **Lights**




115°  
 RA ≥80  
 220-240 VAC  
 PF ≥0,5

2 Years Warranty  
 -20 | +40 °C  
 25.000h

## IP54



| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| LBL18W8  | 8    | 3000 | 640   | 1/40 |
| LBL18C8  | 8    | 4000 | 640   | 1/40 |
| LBL21W12 | 12   | 3000 | 850   | 1/40 |
| LBL21C12 | 12   | 4000 | 850   | 1/40 |



110°  
 RA ≥80  
 220-240 VAC  
 PF ≥0,5

2 Years Warranty  
 -20 | +40 °C  
 25.000h

## IP54




| CODE    | WATT | CCT  | LUMEN |      |
|---------|------|------|-------|------|
| LBLOW8  | 8    | 3000 | 640   | 1/40 |
| LBLOC8  | 8    | 4000 | 640   | 1/40 |
| LBLOW12 | 12   | 3000 | 960   | 1/40 |
| LBLOC12 | 12   | 4000 | 960   | 1/40 |

# Outdoor Lights - Ceiling Lights

**GEYER**

**IP40**



**RA**  
≥80

**100-240**  
VAC

**PF** ≥0,5


**2** Years  
Warranty

**-20 | +40 °C**

**25.000h**




| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| LCL22W12 | 12   | 3000 | 800   | 1/10 |
| LCL22C12 | 12   | 4000 | 800   | 1/10 |
| LCL28W18 | 18   | 3000 | 1200  | 1/20 |
| LCL28C18 | 18   | 4000 | 1200  | 1/20 |

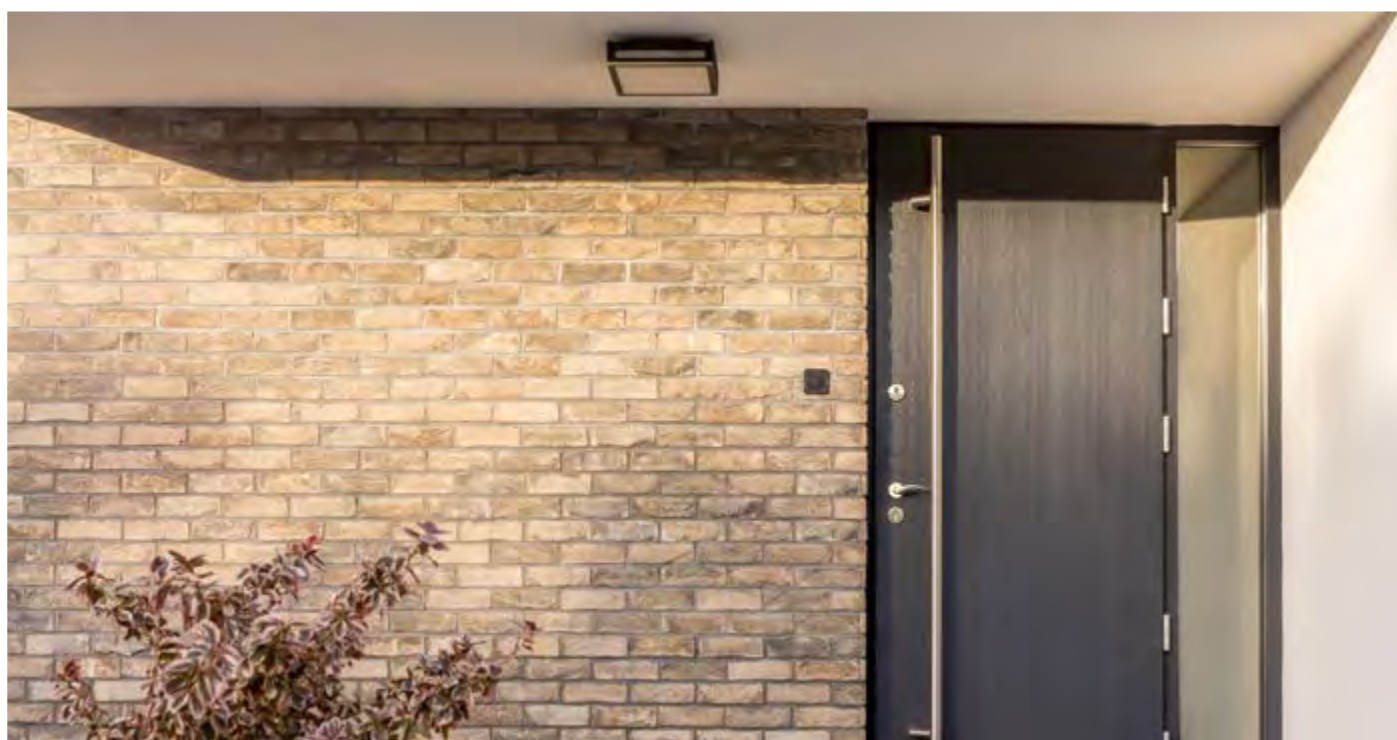



## IP65




**IK10** **PC** **TUV SÜD** **GS**  
**CLASS II** **220-240 VAC** **PF>0,9** **3 Years Warranty**



| CODE   |   | WATT | CCT  | LUMEN |      |
|--------|---|------|------|-------|------|
| 125025 | F | 15   | 3000 | 1500  | 1/20 |
| 125056 | F | 15   | 4000 | 1500  | 1/20 |
| 125773 | F | 15   | 6500 | 1500  | 1/20 |

## IP65




**IK10** **PC** **TUV SÜD** **GS**  
**CLASS II** **220-240 VAC** **PF>0,9** **3 Years Warranty**



| CODE   |   | WATT | CCT  | LUMEN |      |
|--------|---|------|------|-------|------|
| 125803 | F | 17   | 3000 | 1800  | 1/10 |
| 125810 | F | 17   | 4000 | 1800  | 1/10 |
| 125841 | F | 17   | 6500 | 1800  | 1/10 |

## IP65




**IK10** **PC** **TUV SÜD** **GS**  
**CLASS II** **220-240 VAC** **PF>0,9** **3 Years Warranty**



| CODE   |   | WATT | CCT  | LUMEN |     |
|--------|---|------|------|-------|-----|
| 125858 | F | 23   | 3000 | 2500  | 1/6 |
| 126190 | F | 23   | 4000 | 2500  | 1/6 |
| 126220 | F | 23   | 6500 | 2500  | 1/6 |






**IP54**   **MAX**  
15W   **2** Years  
Warranty




| CODE        |   | BASE |      |
|-------------|---|------|------|
| FOWL90303DG | ● | E27  | 1/20 |



**IP44**   **GU10**




| CODE   |   | DESCRIPTION                        |      |
|--------|---|------------------------------------|------|
| 179042 | ● | Surface spot 1xGU10 165B IP44 Inox | 1/20 |



**IP44 2xGU10**




| CODE   |   | DESCRIPTION                          |      |
|--------|---|--------------------------------------|------|
| 179059 | ● | Surface spot 2xGU10 165B-2 IP44 Inox | 1/20 |



**IP44 GU10**




| CODE   |   | DESCRIPTION                        |      |
|--------|---|------------------------------------|------|
| 179066 | ● | Surface spot 1xGU10 165A IP44 Inox | 1/20 |




**IP44 2xGU10**

| CODE   |   | DESCRIPTION                          |      |
|--------|---|--------------------------------------|------|
| 179073 | ● | Surface spot 2xGU10 165A-2 IP44 Inox | 1/20 |




**IP44 GU10**

| CODE   |   | DESCRIPTION                        |      |
|--------|---|------------------------------------|------|
| 179080 | ● | Surface spot 1xGU10 165 IP44 Black | 1/20 |




**IP44 2xGU10**

| CODE   |   | DESCRIPTION                          |      |
|--------|---|--------------------------------------|------|
| 179097 | ● | Surface spot 2xGU10 165-2 IP44 Black | 1/20 |




**IP44 GU10**

| CODE   |   | DESCRIPTION                         |      |
|--------|---|-------------------------------------|------|
| 179103 | ○ | Surface spot 1xGU10 1721 IP44 White | 1/20 |




**IP44 2xGU10**

| CODE   |   | DESCRIPTION                           |      |
|--------|---|---------------------------------------|------|
| 179110 | ○ | Surface spot 2xGU10 1721-2 IP44 White | 1/20 |




**IP44 GU10**

| CODE   |   | DESCRIPTION                        |      |
|--------|---|------------------------------------|------|
| 179127 | ● | Surface spot 1xGU10 146A IP44 Inox | 1/20 |




**IP44 GU10**

| CODE   |   | DESCRIPTION                          |      |
|--------|---|--------------------------------------|------|
| 179134 | ● | Surface spot 1xGU10 146B-A IP44 Inox | 1/20 |




**IP44 2xGU10**

| CODE   |   | DESCRIPTION                          |      |
|--------|---|--------------------------------------|------|
| 179141 | ● | Surface spot 2xGU10 146C-A IP44 Inox | 1/20 |

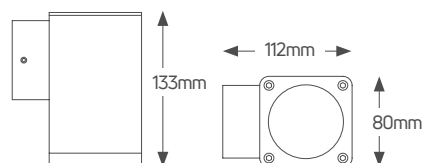


**IP54 GU10**

| CODE   |   | DESCRIPTION                          |      |
|--------|---|--------------------------------------|------|
| 179158 | ● | Surface spot 1xGU10 1842A IP54 Black | 1/20 |

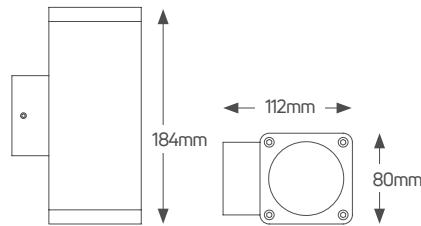


**IP54 2xGU10**

| CODE   |   | DESCRIPTION                            |      |
|--------|---|----------------------------------------|------|
| 179165 | ● | Surface spot 2xGU10 1842A-2 IP54 Black | 1/20 |

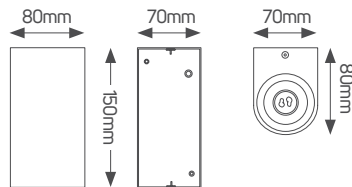


**IP65 2xGU10**

| CODE   |  | DESCRIPTION                            |      |
|--------|--|----------------------------------------|------|
| 180178 |  | Surface spot up-down 2xGU10 IP65 Black | 1/20 |

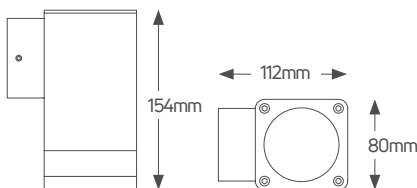


**IP54 GU10**

| CODE   |   | DESCRIPTION                          |      |
|--------|---|--------------------------------------|------|
| 179172 | ● | Surface spot 1xGU10 1842B IP54 Black | 1/20 |

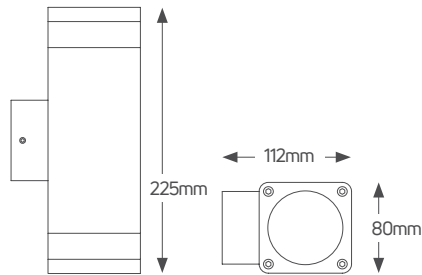


**IP54 2xGU10**

| CODE   |   | DESCRIPTION                            |      |
|--------|---|----------------------------------------|------|
| 179189 | ● | Surface spot 2xGU10 1842B-2 IP54 Black | 1/20 |



**IP44 GU10**



| CODE   |   | DESCRIPTION                             |      |
|--------|---|-----------------------------------------|------|
| 179196 | ● | Surface spot 1xGU10 146B-ALU IP44 Black | 1/20 |



**IP44 2xGU10**



| CODE   |   | DESCRIPTION                             |      |
|--------|---|-----------------------------------------|------|
| 179202 | ● | Surface spot 2xGU10 146C-ALU IP44 Black | 1/20 |



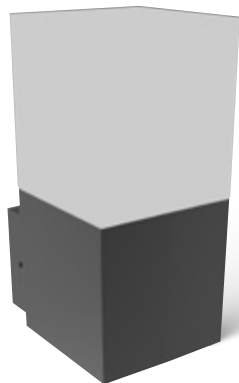


**IP54** **MAX** 25W **2** Years Warranty

| CODE          |   | WATT | CCT  | LUMEN | BASE |      |
|---------------|---|------|------|-------|------|------|
| LOWS106165WDG | ● | 6    | 3000 | 250   | -    | 1/28 |
| FOWS106165DG  | ● | -    | -    | -     | E27  | 1/10 |




**IP54** **2** Years Warranty

| CODE          |   | WATT | CCT  | LUMEN |      |
|---------------|---|------|------|-------|------|
| LOWS146178WDG | ● | 6    | 3000 | 250   | 1/12 |



**IP54** **2** Years Warranty


| CODE         |   | WATT | CCT  | LUMEN |      |
|--------------|---|------|------|-------|------|
| LOWS18050WDG | ● | 6    | 3000 | 250   | 1/20 |




**IP54** **MAX**  
25W **2** Years  
Warranty




| CODE         |   | BASE |      |
|--------------|---|------|------|
| FOWR145220DG | ● | E27  | 1/20 |




**IP54** **2** Years  
Warranty

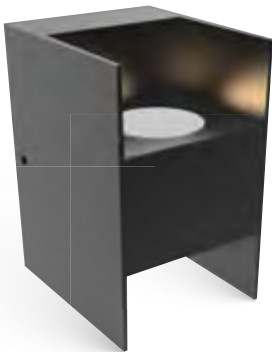


| CODE         |   | WATT | CCT  | LUMEN |      |
|--------------|---|------|------|-------|------|
| LOWL90120WDG | ● | 6    | 3000 | 250   | 1/20 |



**IP54** **2** Years Warranty

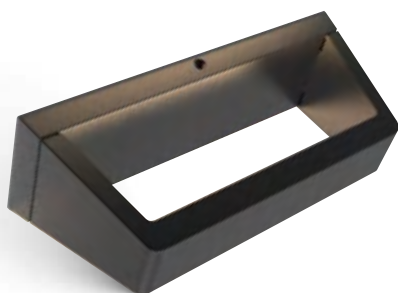


| CODE         |   | WATT | CCT  | LUMEN |      |
|--------------|---|------|------|-------|------|
| LOWL80240WDG | ● | 6    | 3000 | 250   | 1/10 |




**IP54** **2** Years Warranty




| CODE         |   | WATT | CCT  | LUMEN |      |
|--------------|---|------|------|-------|------|
| LOWL62235WDG | ● | 6    | 3000 | 250   | 1/25 |




**IP54** **2** Years Warranty

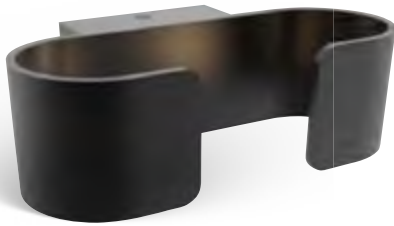


| CODE          |   | WATT | CCT  | LUMEN |      |
|---------------|---|------|------|-------|------|
| LOWL200123WW  | ○ | 6    | 3000 | 250   | 1/10 |
| LOWL200123WDG | ● | 6    | 3000 | 250   | 1/10 |



**IP65** **MAX 18W** **2** Years Warranty

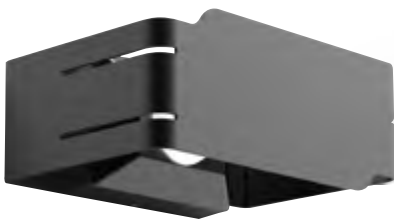


| CODE        |   | BASE |       |
|-------------|---|------|-------|
| FOWL70160W  | ○ | G9   | 1/120 |
| FOWL70160DG | ● | G9   | 1/20  |



**IP54** **MAX 16W** **2** Years Warranty




| CODE         |   | BASE |      |
|--------------|---|------|------|
| FOWR100146DG | ● | GU10 | 1/20 |



**IP54** **2** Years Warranty




| LED LIGHTS   |                                                                                   |      |      |       |                                                                                     |
|--------------|-----------------------------------------------------------------------------------|------|------|-------|-------------------------------------------------------------------------------------|
| CODE         |                                                                                   | WATT | CCT  | LUMEN |  |
| LOWP12583WW  |  | 12   | 3000 | 110   | 1/40                                                                                |
| LOWP12583WSG |  | 12   | 3000 | 110   | 1/40                                                                                |



**IP54** **2** Years Warranty




| CODE          |   | WATT | CCT  | LUMEN |      |
|---------------|---|------|------|-------|------|
| LOWS125125WSG | ● | 12   | 3000 | 110   | 1/40 |
| LOWS125125WDG | ● | 12   | 3000 | 110   | 1/40 |



**IP54** **2** Years Warranty




| CODE         |   | WATT | CCT  | LUMEN |      |
|--------------|---|------|------|-------|------|
| LOWS23080WSG | ● | 16   | 3000 | 140   | 1/24 |
| LOWP23080WDG | ● | 16   | 3000 | 140   | 1/24 |




**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty 🌡️ **-25 | +40 °C**

| CODE    | WATT | CCT  | LUMEN | 📦    |
|---------|------|------|-------|------|
| SL70F1W | 1    | 3000 | 60    | 1/50 |




**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty 🌡️ **-25 | +40 °C**

| CODE    | WATT | CCT  | LUMEN | 📦    |
|---------|------|------|-------|------|
| SL70L1W | 1    | 3000 | 60    | 1/50 |



**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty 🌡️ **-25 | +40 °C**


| CODE    | WATT | CCT  | LUMEN | 📦    |
|---------|------|------|-------|------|
| SL70T1W | 1    | 3000 | 60    | 1/50 |

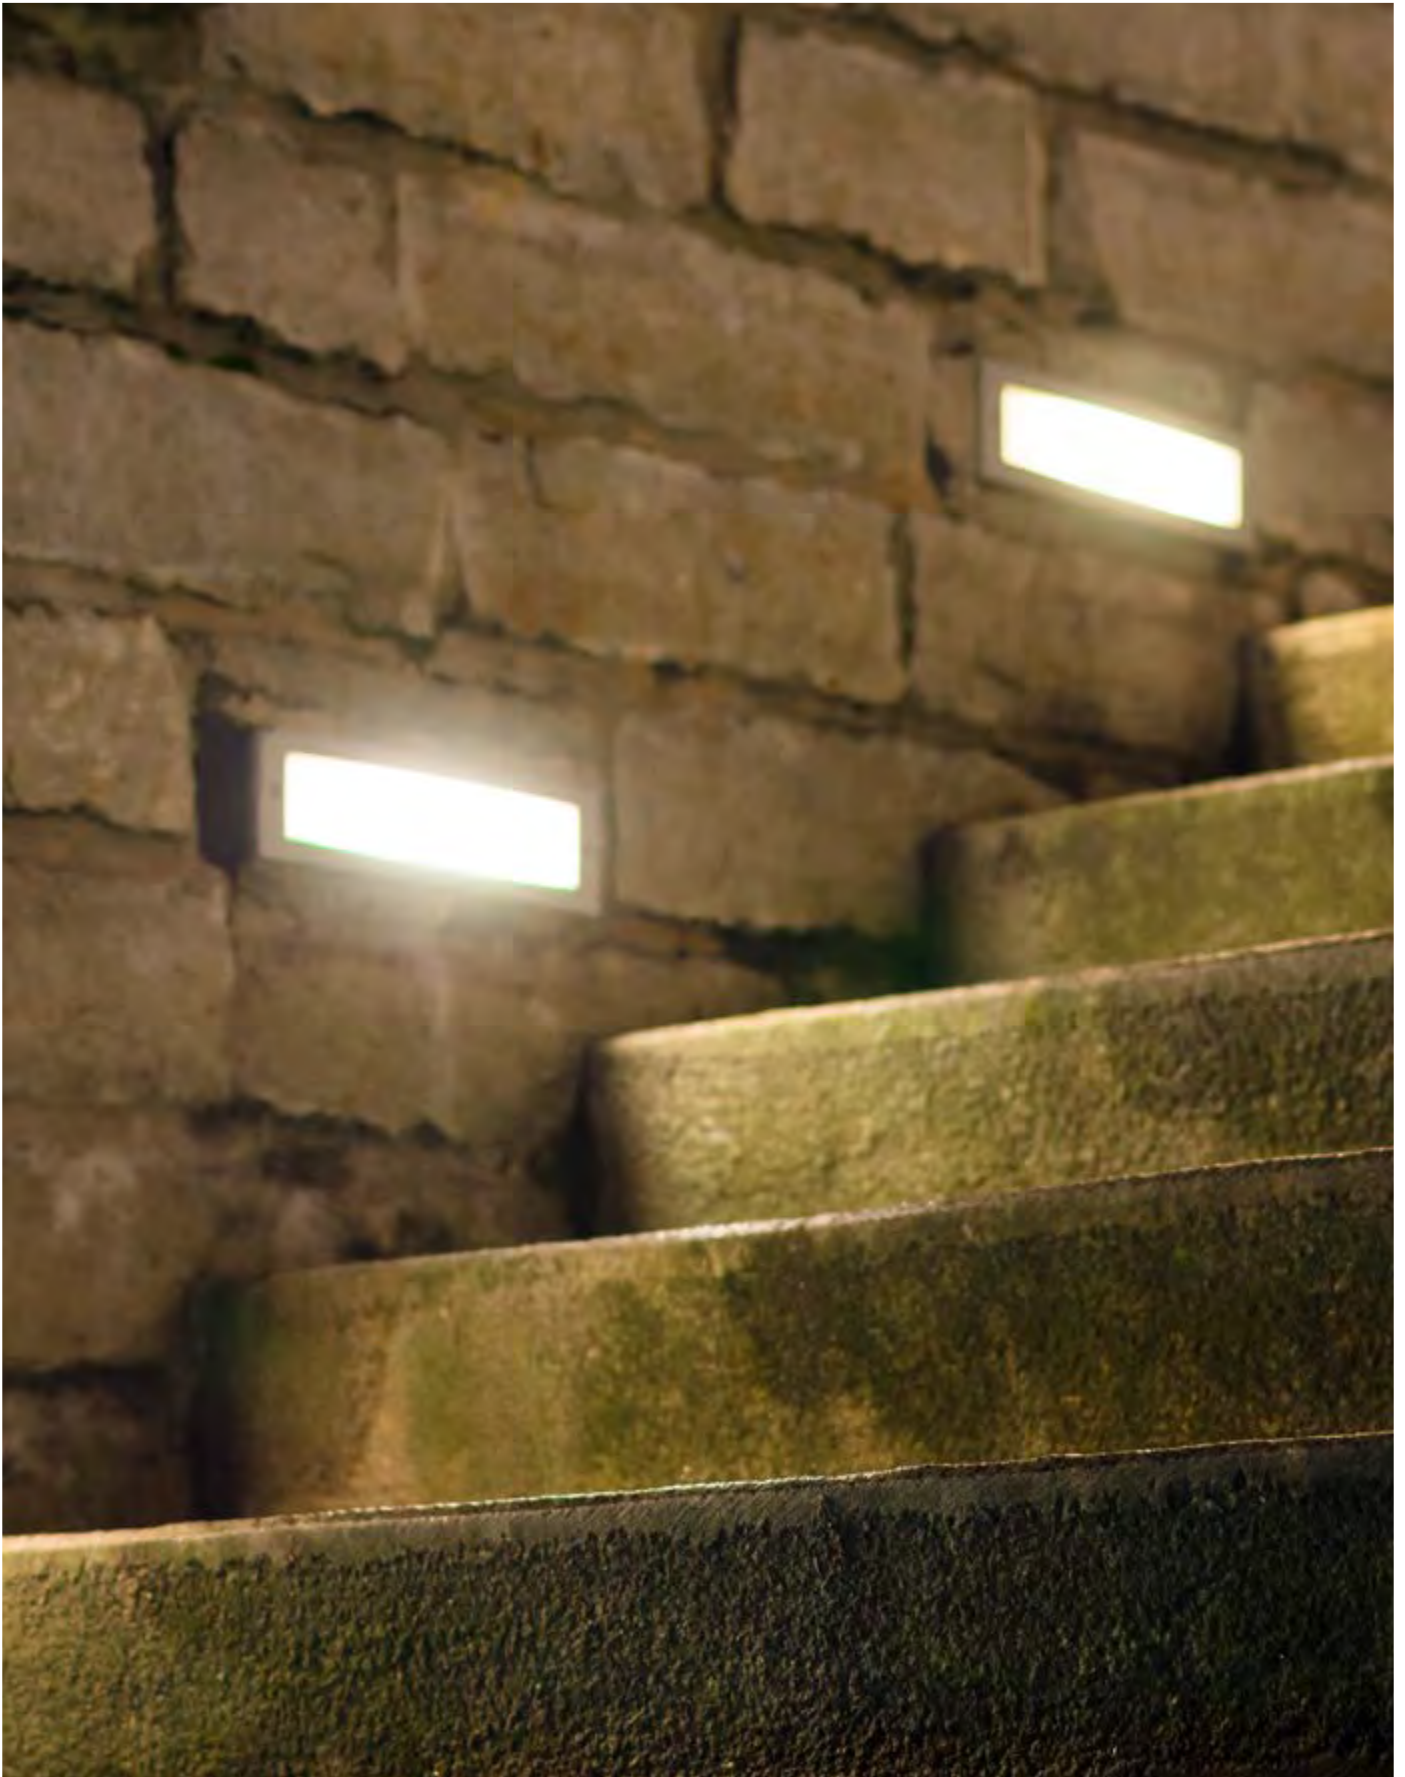




# Outdoor **Lights - Step Lights**

**GEYER**




**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty 🌡️ **-25 | +40 °C**

| CODE    | WATT | CCT  | LUMEN |      |
|---------|------|------|-------|------|
| SL70V1W | 1    | 3000 | 60    | 1/50 |



**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty 🌡️ **-25 | +40 °C**

| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| SL105F3W | 3    | 3000 | 180   | 1/50 |




**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty 🌡️ **-25 | +40 °C**

| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| SL105L3W | 3    | 3000 | 180   | 1/50 |


# Outdoor **Lights - Step Lights**

**GEYER**




**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty  
 -25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| SL110F3W | 3    | 3000 | 180   | 1/50 |



**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty  
 -25 | +40 °C


| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| SL110L3W | 3    | 3000 | 180   | 1/50 |



**IP65** ⚡ **85-265 VAC**  
**2** Years Warranty  
 -25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |      |
|----------|------|------|-------|------|
| SL170L3W | 3    | 3000 | 180   | 1/50 |

## LED Spike wall mounted / inground 5W



45°

**IP68**

**IK08**

**RA**  
**>70**

**CLASS II**

**85-265**  
**VAC**


**3** Years  
Warranty

**-40 | +50 °C**

| CODE   | WATT | CCT   | LUMEN                                |      |
|--------|------|-------|--------------------------------------|------|
| SPK42W | 5    | 3000  | 300                                  | 1/50 |
| SPK42C | 5    | 4000  | 300                                  | 1/50 |
| SPK42R | 5    | RED   | <span style="color: red;">●</span>   | 1/50 |
| SPK42B | 5    | BLUE  | <span style="color: blue;">●</span>  | 1/50 |
| SPK42G | 5    | GREEN | <span style="color: green;">●</span> | 1/50 |




## Spike wall mounted / inground GU10



**IP65** **GU10**

| CODE   | DESCRIPTION                |      |
|--------|----------------------------|------|
| 180154 | Spike spot 1xGU10 IP65 D85 | 1/20 |


## Spike wall mounted / inground GU10



IP65 GU10

| CODE   | DESCRIPTION                |      |
|--------|----------------------------|------|
| 180161 | Spike spot 1xGU10 IP65 D98 | 1/20 |

## LED Spike wall mounted / inground 5W

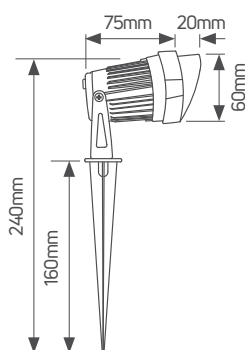

45°

IP68

IK08

RA  
>70

CLASS II


85-265  
VAC

3 Years  
Warranty

-40 | +50 °C

| CODE   | WATT | CCT   | LUMEN |      |
|--------|------|-------|-------|------|
| SPK60W | 5    | 3000  | 300   | 1/50 |
| SPK60C | 5    | 4000  | 300   | 1/50 |
| SPK60R | 5    | RED   |       | 1/50 |
| SPK60B | 5    | BLUE  |       | 1/50 |
| SPK60G | 5    | GREEN |       | 1/50 |

## LED Spike wallmounted / inground 7W



45°

**IP68**

**IK08**

**RA**  
**>70**

**CLASS II**


**85-265**  
**VAC**

**3** Years  
Warranty

**-40 | +50 °C**

| CODE   | WATT | CCT   | LUMEN |      |
|--------|------|-------|-------|------|
| SPK75W | 7    | 3000  | 420   | 1/50 |
| SPK75C | 7    | 4000  | 420   | 1/50 |
| SPK75R | 7    | RED   |       | 1/50 |
| SPK75B | 7    | BLUE  |       | 1/50 |
| SPK75G | 7    | GREEN |       | 1/50 |

## LED Spike wallmounted / inground 10W



45°

**IP68**

**IK08**

**RA**  
**>70**

**CLASS II**


**85-265**  
**VAC**

**3** Years  
Warranty

**-40 | +50 °C**

| CODE   | WATT | CCT   | LUMEN |      |
|--------|------|-------|-------|------|
| SPK85W | 10   | 3000  | 700   | 1/20 |
| SPK85C | 10   | 4000  | 700   | 1/20 |
| SPK85R | 10   | RED   |       | 1/20 |
| SPK85B | 10   | BLUE  |       | 1/20 |
| SPK85G | 10   | GREEN |       | 1/20 |

Window Light 8W

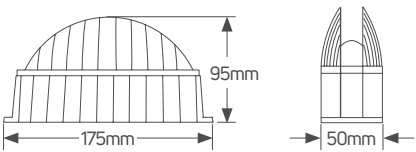


**IP65**

**85-265 VAC**


**3 Years Warranty**

| CODE  | WATT | CCT  | LUMEN |      |
|-------|------|------|-------|------|
| WD8GW | 8    | 3000 | 540   | 1/20 |



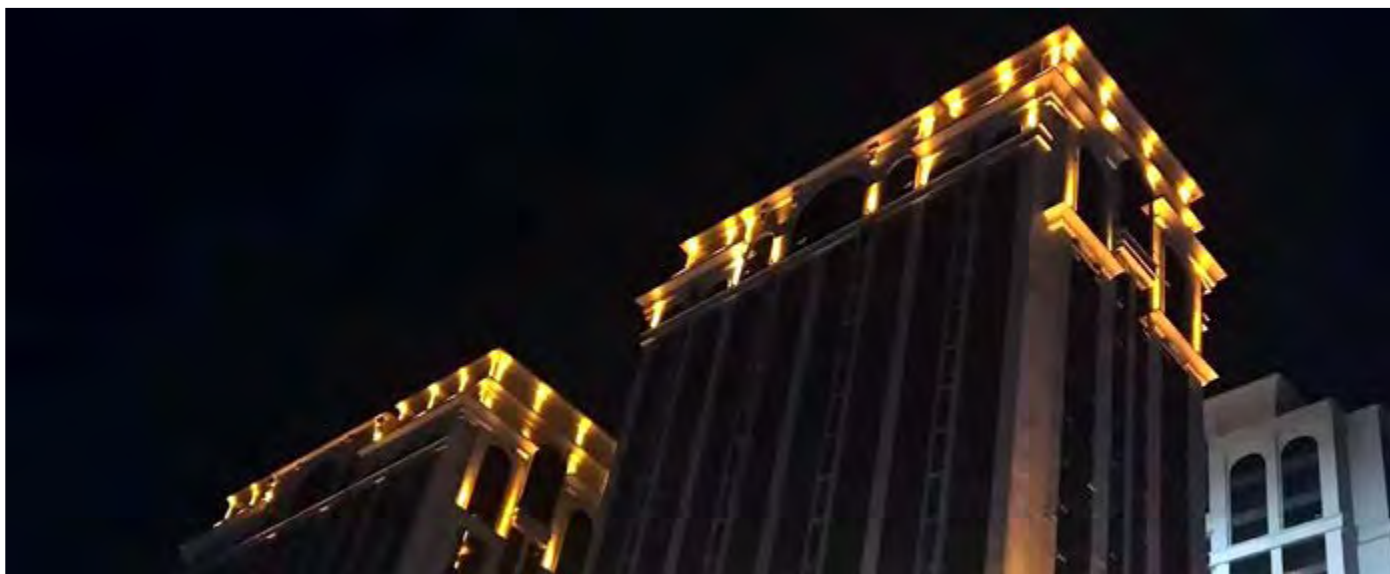

## 7m Height Coverage



IP65

85-265 VAC


3 Years Warranty

-25 | +40 °C



| CODE     | WATT | CCT                                  | LUMEN |      |
|----------|------|--------------------------------------|-------|------|
| SP10W10D | 10   | 3000                                 | 480   | 1/12 |
| 180185   | 10   | 4000                                 | 480   | 1/12 |
| 180192   | 10   | <span style="color: blue;">●</span>  | 480   | 1/12 |
| 180208   | 10   | <span style="color: green;">●</span> | 480   | 1/12 |

## 60m Height Coverage



IP65

85-265 VAC

3 Years Warranty


-25 | +40 °C



| CODE     | WATT | CCT  | LUMEN |     |
|----------|------|------|-------|-----|
| SP81W10D | 81   | 3000 | 5670  | 1/4 |



## Wall Washer 9W 300mm IP65



15°

**IP65**

**85-265 VAC**

**CRI >80**

**OSRAM**  
2835

**MAX5**pcs


**-25 | +45 °C**

**5** Years  
Warranty



| CODE   | WATT | CCT  | LUMEN |   |
|--------|------|------|-------|---|
| 180062 | 9    | 3000 | 600   | 1 |
| 180079 | 9    | 4000 | 600   | 1 |

## Wall Washer 18W 500mm IP65



15°

**IP65**

**85-265 VAC**

**CRI >80**

**OSRAM**  
2835

**MAX5**pcs

**-25 | +45 °C**

**5** Years  
Warranty




| CODE   | WATT | CCT  | LUMEN |   |
|--------|------|------|-------|---|
| 180086 | 18   | 3000 | 1200  | 1 |
| 180093 | 18   | 4000 | 1200  | 1 |

**5** Years  
Warranty



## Wall Washer 36W 1000mm IP65



15°

**IP65**

**85-265 VAC**

**CRI >80**

**OSRAM**  
2835

**MAX5**pcs


**-25 | +45 °C**

| CODE   | WATT | CCT  | LUMEN |   |
|--------|------|------|-------|---|
| 180109 | 36   | 3000 | 2400  | 1 |
| 180116 | 36   | 4000 | 2400  | 1 |

**5** Years  
Warranty



## Wall Washer Recessed 36W 1000mm IP65



15°

**IP65**

**85-265 VAC**


**CRI >80**

**OSRAM**  
2835

**MAX5**pcs


**-25 | +45 °C**

| CODE   | WATT | CCT  | LUMEN |   |
|--------|------|------|-------|---|
| 180123 | 36   | 3000 | 2400  | 1 |
| 180130 | 36   | 4000 | 2400  | 1 |





**IP54** **MAX** 16W **2** Years Warranty

| CODE         |   | BASE |     |
|--------------|---|------|-----|
| FOCR100800DG | ● | E27  | 1/6 |




**IP54** **2** Years Warranty

| CODE          |   | WATT | CCT  | LUMEN |     |
|---------------|---|------|------|-------|-----|
| LOCS175800WDG | ● | 6    | 3000 | 250   | 1/4 |

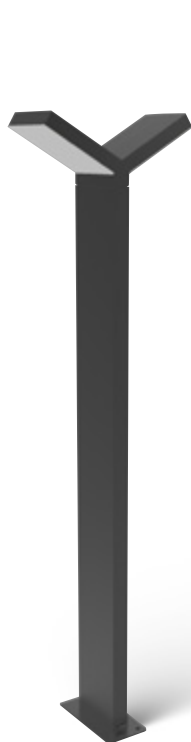


**IP54** **2** Years Warranty

| CODE         |   | WATT | CCT  | LUMEN |     |
|--------------|---|------|------|-------|-----|
| LOCS210800DW | ● | 2x6  | 3000 | 500   | 1/6 |




**IP54** **2** Years Warranty

| CODE           |   | WATT | CCT  | LUMEN |     |
|----------------|---|------|------|-------|-----|
| LOCBS120800WDG | ● | 6    | 3000 | 250   | 1/4 |




**IP54** **2** Years Warranty

| CODE         |   | WATT | CCT  | LUMEN | BASE |     |
|--------------|---|------|------|-------|------|-----|
| LOCS76800WDG | ● | 6    | 3000 | 250   | -    | 1/9 |
| FOS76800E27  | ● | -    | -    | -     | E27  | 1/9 |




**IP54** **MAX 16W** **E27** **2** Years Warranty

| CODE        |   | BASE |     |
|-------------|---|------|-----|
| FOWR80800DG | ● | E27  | 1/9 |




**IP54**    **MAX**  
16W    **GU10**    **2** Years  
Warranty

| CODE        |   | BASE |     |
|-------------|---|------|-----|
| FOCR80600DG | ● | E27  | 1/6 |



**IP54**    **MAX**  
2x16W    **2** Years  
Warranty

| CODE         |   | BASE   |     |
|--------------|---|--------|-----|
| FOCR80600DG2 | ● | 2xGU10 | 1/6 |





**IP54** **2** Years Warranty



| CODE         |   | WATT | CCT  | LUMEN |     |
|--------------|---|------|------|-------|-----|
| LOC192800WDG | ● | 6    | 3000 | 250   | 1/6 |









IP68

12V  
AC/DC

3 Years  
Warranty

-25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |       |
|----------|------|------|-------|-------|
| LULR42W1 | 1    | 3000 | 60    | 1/100 |





IP68

12V  
AC/DC

3 Years  
Warranty

-25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |       |
|----------|------|------|-------|-------|
| LULR52W1 | 1    | 3000 | 60    | 1/100 |





IP68

12V  
AC/DC

3 Years  
Warranty

-25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |       |
|----------|------|------|-------|-------|
| LULR62W2 | 2    | 3000 | 90    | 1/100 |
| LULR62C2 | 2    | 4000 | 90    | 1/100 |





IP68

12V  
AC/DC

3 Years  
Warranty

-25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |       |
|----------|------|------|-------|-------|
| LULS42W1 | 1    | 3000 | 60    | 1/100 |





IP68

12V  
AC/DC

3 Years  
Warranty

-25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |       |
|----------|------|------|-------|-------|
| LULS52W1 | 1    | 3000 | 60    | 1/100 |




IP68

12V  
AC/DC

3 Years  
Warranty

-25 | +40 °C

| CODE     | WATT | CCT  | LUMEN |       |
|----------|------|------|-------|-------|
| LULS62W1 | 2    | 3000 | 90    | 1/100 |



Cut Hole: 58mm




**IP68**

**12V**  
AC/DC

**3** Years  
Warranty

**-25 | +40 °C**

| CODE      | WATT | CCT  | LUMEN |       |
|-----------|------|------|-------|-------|
| LULR62W14 | 2    | 3000 | 60    | 1/100 |



Cut Hole: 58mm




**IP68**

**12V**  
AC/DC


**3** Years  
Warranty

**-25 | +40 °C**

| CODE      | WATT | CCT  | LUMEN |       |
|-----------|------|------|-------|-------|
| LULR62W12 | 1    | 3000 | 60    | 1/100 |



Cut Hole: 58mm




**IP68**

**12V**  
AC/DC

**3** Years  
Warranty

**-25 | +40 °C**

| CODE      | WATT | CCT  | LUMEN |       |
|-----------|------|------|-------|-------|
| LULR62W11 | 1    | 3000 | 60    | 1/100 |




**IP68**

**12V**  
AC/DC

**3** Years  
Warranty

**-25 | +40 °C**

| CODE       | WATT | CCT  | LUMEN |       |
|------------|------|------|-------|-------|
| LULR55W1AL | 3    | 3000 | 60    | 1/100 |




**IP68**

**GU10**

**3** Years  
Warranty

**-25 | +40 °C**

| CODE        | BASE |       |
|-------------|------|-------|
| LULR120GU10 | GU10 | 1/100 |




**IP68**

**GU10**


**3** Years  
Warranty

**-25 | +40 °C**

| CODE        | BASE |       |
|-------------|------|-------|
| LULS120GU10 | GU10 | 1/100 |



Cut Hole: 120mm



30°

**IP68**




**12V**  
AC/DC

**3** Years  
Warranty

**-25 | +40 °C**

| CODE      | WATT | CCT  | LUMEN |       |
|-----------|------|------|-------|-------|
| LULR125W6 | 6    | 3000 | 300   | 1/100 |



Cut Hole: 140mm



30°

**IP68**




**12V**  
AC/DC


**3** Years  
Warranty

**-25 | +40 °C**

| CODE      | WATT | CCT  | LUMEN |       |
|-----------|------|------|-------|-------|
| LULR150W9 | 9    | 3000 | 540   | 1/100 |



Cut Hole: 175mm



30°

**IP68**




**12V**  
AC/DC


**3** Years  
Warranty

**-25 | +40 °C**

| CODE       | WATT | CCT  | LUMEN |       |
|------------|------|------|-------|-------|
| LULR180W12 | 12   | 3000 | 720   | 1/100 |



Cut Hole: 175mm



30°

**IP68**



**12V**  
AC/DC

**3** Years  
Warranty

**-25 | +40 °C**

| CODE       | WATT | CCT  | LUMEN |       |
|------------|------|------|-------|-------|
| LULR210W18 | 18   | 3000 | 1000  | 1/100 |

CHAPTER C

# Public Lighting





## City **Lights**



## Lance

lm/W  
90

120°

IP65

IK08

CRI  
>70

CLASS I

110-277  
VAC

PF&gt;0,9

5 Years  
Warranty

50.000h

-20 | +50 °C



| CODE          | TYPE        | LUMEN | WATT |
|---------------|-------------|-------|------|
| LP.LAN.040.XX | KN-GLLA-45W | 4100  | 45   |
| LP.LAN.055.XX | KN-GLLA-60W | 5400  | 60   |

\*XX=27 for 2700K XX=40 for 4000K

## Levent

lm/W  
90

120°

IP65

IK08

CRI  
>70

CLASS I

110-277  
VAC

PF&gt;0,9

5 Years  
Warranty

50.000h

-20 | +50 °C



| CODE          | TYPE        | LUMEN | WATT |
|---------------|-------------|-------|------|
| LP.LEV.040.XX | KN-GLLE-45W | 4100  | 45   |
| LP.LEV.055.XX | KN-GLLE-60W | 5400  | 60   |

\*XX=30 for 3000K XX=40 for 4000K



## Vintage Mini

lm/W  
85

120°

IP65

IK08

CRI  
>70

CLASS I/II

90-280  
VAC

PF&gt;0,95

5 Years  
Warranty

50.000h

-40 | +60 °C

| CODE          | TYPE        | LUMEN | WATT |
|---------------|-------------|-------|------|
| LP.VNM.020.XX | YZTL859-25W | 2200  | 25   |
| LP.VNM.030.XX | YZTL859-25W | 3000  | 35   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K



## Perm

lm/W  
95

120°

IP66

IK08

CRI  
>70

CLASS I/II

100-277  
VAC

PF&gt;0,95

5 Years  
Warranty

50.000h

-20 | +50 °C

| CODE          | TYPE          | LUMEN | WATT |
|---------------|---------------|-------|------|
| LP.PRM.030.XX | YZTL856A-30W  | 2700  | 30   |
| LP.PRM.040.XX | YZTL856A-45W  | 4000  | 45   |
| LP.PRM.055.XX | YZTL856A-60W  | 5500  | 60   |
| LP.PRM.065.XX | YZTL856B-70W  | 6300  | 70   |
| LP.PRM.090.XX | YZTL856B-100W | 9000  | 100  |
| LP.PRM.110.XX | YZTL856B-120W | 11000 | 120  |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K

## Classic

lm/W  
100

150°

IP66

IK08/09

CRI  
>75

CLASS I/II

110-277  
VAC

PF&gt;0,92

5 Years  
Warranty

100.000h

-20 | +50 °C



| CODE          | TYPE             | LUMEN | WATT |
|---------------|------------------|-------|------|
| LP.GCL.030.XX | JD-1044A-30WXTE  | 3000  | 30   |
| LP.GCL.060.XX | JD-1044A-60WXTE  | 6000  | 60   |
| LP.GCL.100.XX | JD-1044A-100WXTE | 10000 | 100  |

\*xx=30 for 3000K   xx=40 for 4000K   xx=50 for 5000K

## Amelia

120°

IP65

90-280  
VACCRI  
>705 Years  
Warranty

-40 | +60 °C



| CODE          | WATT | CCT  | LUMEN |
|---------------|------|------|-------|
| LP.AML.050.30 | 40   | 3000 | 4900  |
| LP.AML.050.40 | 40   | 4000 | 4900  |
| LP.AML.080.30 | 60   | 3000 | 7900  |
| LP.AML.080.40 | 60   | 4000 | 7900  |



Pearl

lm/W 100 120° IP66 IK09 CRI >70 CLASS I/II

90-280 VAC PF>0,95 5 Years Warranty 100.000h -20 | +50 °C

| CODE          | TYPE       | LUMEN | WATT |
|---------------|------------|-------|------|
| LP.BAL.030.XX | T-10ALED30 | 3000  | 30   |
| LP.BAL.040.XX | T-10ALED40 | 4000  | 40   |
| LP.BAL.060.XX | T-10ALED60 | 6000  | 60   |
| LP.BAL.080.XX | T-10ALED80 | 8000  | 80   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K



Crown

lm/W 110 145x85° IP66 IK09 CRI >70 CLASS I/II

100-240 VAC PF>0,95 5 Years Warranty 120.000h -20 | +50 °C

| CODE          | TYPE           | LUMEN | WATT |
|---------------|----------------|-------|------|
| LP.CRW.045.XX | T-85MNLED40-24 | 4400  | 40   |
| LP.CRW.065.XX | T-85MNLED60-24 | 6600  | 60   |
| LP.CRW.085.XX | T-85MNLED80-32 | 8800  | 80   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K



Villa

lm/W 120 150° IP66 IK09 CRI >70 CLASS I/II

120-240 VAC PF>0,95 5 Years Warranty 150.000h -40 | +60 °C

| CODE          | TYPE           | LUMEN | WATT |
|---------------|----------------|-------|------|
| LP.VIL.025.XX | UNI-YA05-1-020 | 2400  | 20   |
| LP.VIL.035.XX | UNI-YA05-1-030 | 3600  | 30   |
| LP.VIL.050.XX | UNI-YA05-1-040 | 4800  | 40   |
| LP.VIL.060.XX | UNI-YA05-1-050 | 6000  | 50   |
| LP.VIL.075.XX | UNI-YA05-1-060 | 7200  | 60   |
| LP.VIL.085.XX | UNI-YA05-1-070 | 8400  | 70   |
| LP.VIL.095.XX | UNI-YA05-1-080 | 9600  | 80   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K

## Rodo

lm/W  
100

145x85°

IP66

IK09

CRI  
>70

CLASS I/II

90-280  
VAC

PF&gt;0,95

5/10 Years  
Warranty

100.000h

-20 | +50 °C



| CODE         | TYPE          | LUMEN | WATT |
|--------------|---------------|-------|------|
| LPT21.035.XX | T-21LLED35-24 | 3500  | 35   |
| LPT21.060.XX | T-21LLED60-24 | 6000  | 60   |
| LPT21.075.XX | T-21LLED75-36 | 7500  | 75   |
| LPT21.100.XX | T-21LLED75-48 | 10000 | 100  |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K

## Square

lm/W  
100

145x85°

IP66

IK09

CRI  
>70

CLASS I/II

90-280  
VAC

PF&gt;0,95

5 Years  
Warranty

120.000h

-40 | +60 °C



| CODE         | TYPE          | LUMEN | WATT |
|--------------|---------------|-------|------|
| LPT70.035.XX | T-70NLED35-32 | 3500  | 35   |
| LPT70.060.XX | T-70NLED60-32 | 6000  | 60   |
| LPT70.075.XX | T-70NLED75-48 | 7500  | 75   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K

## Plaza U11

lm/W  
100

150°

IP65

IK09

CRI  
>75

CLASS I

90-280  
VAC

PF&gt;0,95

5 Years  
Warranty

100.000h

-40 | +55 °C



| CODE          | TYPE       | LUMEN | WATT |
|---------------|------------|-------|------|
| LP.U11.040.XX | AUA7011-40 | 4100  | 40   |
| LP.U11.070.XX | AUA7011-70 | 7200  | 70   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K

## Plaza U15

lm/W  
100

150°

IP65

IK10

CRI  
>75

CLASS I

90-280  
VAC

PF&gt;0,95

5 Years  
Warranty

100.000h

-40 | +55 °C



| CODE          | TYPE       | LUMEN | WATT |
|---------------|------------|-------|------|
| LP.U15.040.XX | AUA115B-40 | 4100  | 40   |
| LP.U15.070.XX | AUA115B-70 | 7200  | 70   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K



## Plaza U81

lm/W 100 150° IP65 IK09 CRI >75 CLASS I  
 90-280 VAC PF>0,95 5 Years Warranty 100.000h -40 | +55 °C

| CODE          | TYPE        | LUMEN | WATT |
|---------------|-------------|-------|------|
| LP.U81.040.XX | AUA6081-35  | 3600  | 35   |
| LP.U81.055.XX | AUA6081-55  | 5500  | 55   |
| LP.U81.070.XX | AUA6081-70  | 7000  | 70   |
| LP.U81.100.XX | AUA6081-105 | 10600 | 105  |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K



## Opera

lm/W 120 145x85° IP66 IK09 CRI >70 CLASS I/II  
 90-280 VAC PF>0,95 5 Years Warranty 150.000h -40 | +60 °C

| CODE          | TYPE                | LUMEN | WATT |
|---------------|---------------------|-------|------|
| LP.OPR.020.XX | UNI-YA03YA03-NE-A1  | 1980  | 18   |
| LP.OPR.030.XX | UNI-YA03YA03-NE-A3  | 2750  | 25   |
| LP.OPR.040.XX | UNI-YA03YA03-NE-A5  | 3850  | 35   |
| LP.OPR.050.XX | UNI-YA03YA03-NE-A7  | 4950  | 45   |
| LP.OPR.070.XX | UNI-YA03YA03-NE-A9  | 7150  | 65   |
| LP.OPR.080.XX | UNI-YA03YA03-NE-A11 | 8160  | 80   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K





## Universal

lm/W  
105

135°

IP66

IK09

CRI  
>70

CLASS I/II

90-280  
VAC

PF&gt;0,98

5/10 Years  
Warranty

150.000h

-40 | +60 °C

| CODE          | TYPE              | LUMEN | WATT |
|---------------|-------------------|-------|------|
| LP.UN1.040.XX | UNIVERSAL-GL-1-16 | 3800  | 38   |
| LP.UN1.055.XX | UNIVERSAL-GL-1-24 | 5750  | 53   |
| LP.UN1.075.XX | UNIVERSAL-GL-1-32 | 7600  | 70   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K



## Universal 130

lm/W  
130

135°

IP66

IK09

CRI  
>70

CLASS I/II

90-280  
VAC

PF&gt;0,98

5/10 Years  
Warranty

150.000h

-40 | +60 °C

| CODE          | TYPE              | LUMEN | WATT |
|---------------|-------------------|-------|------|
| LP.UN3.035.XX | UNIVERSAL-GL-1-24 | 3500  | 27   |
| LP.UN3.045.XX | UNIVERSAL-GL-1-32 | 4500  | 35   |
| LP.UN3.070.XX | UNIVERSAL-GL-1-48 | 7100  | 55   |
| LP.UN3.090.XX | UNIVERSAL-GL-1-64 | 9100  | 70   |

\*xx=30 for 3000K xx=40 for 4000K xx=50 for 5000K

## Venus

lm/W  
105

135°

IP66

IK10

CRI  
>70

CLASS I/II

90-280  
VAC

PF&gt;0,98

5/10 Years  
Warranty

150.000h

-40 | +60 °C



| CODE          | TYPE     | LUMEN | WATT |
|---------------|----------|-------|------|
| LP.VN1.040.XX | VENUS-16 | 3800  | 38   |
| LP.VN1.060.XX | VENUS-24 | 5800  | 55   |
| LP.VN1.080.XX | VENUS-32 | 7800  | 73   |

\*xx=30 for 3000K   xx=40 for 4000K   xx=50 for 5000K

## Venus 130

lm/W  
130

135°

IP66

IK10

CRI  
>70

CLASS I/II

90-280  
VAC

PF&gt;0,98

5/10 Years  
Warranty

150.000h

-40 | +60 °C



| CODE          | TYPE     | LUMEN | WATT |
|---------------|----------|-------|------|
| LP.VN3.055.XX | VENUS-24 | 5300  | 41   |
| LP.VN3.070.XX | VENUS-32 | 7200  | 56   |

\*xx=30 for 3000K   xx=40 for 4000K   xx=50 for 5000K



## Street **Lights**

## Economy

lm/W  
100

150x80°

IP68

IK08

CRI  
>80

CLASS I

110-277  
VAC

PF>0,95

3 Years  
Warranty

50.000h

-20 | +50 °C



| CODE             | TYPE                                                         | LUMEN | WATT |
|------------------|--------------------------------------------------------------|-------|------|
| LSTR.LRS2.040.XX | LED-RS1-40                                                   | 4000  | 40   |
| LSTR.LRS2.060.XX | LED-RS1-60                                                   | 6000  | 60   |
| LSTR.LRS2.100.XX | LED-RS1-100                                                  | 10000 | 100  |
| LSTR.LRS2.150.XX | LED-RS1-150                                                  | 15000 | 150  |
| LSTR.LRS2.200.XX | LED-RS1-200                                                  | 22100 | 200  |
| LSTR.AD.S        | adjustable - angle bracket for 60W Lighting fixture          |       |      |
| LSTR.AD.B        | adjustable - angle bracket for 100-150-200W Lighting fixture |       |      |
| LSTR.MF4         | Converter Ø60 to Ø40 for street light Economy                |       |      |

\*XX=40 for 4000K XX=50 for 5000K

## Nova

lm/W  
140

90x120°

IP66

IK10

CRI  
>80

CLASS I/II

100-277  
VAC

PF>0,99

5/10 Years  
Warranty

100.000h

-30 | +60 °C



| CODE            | TYPE             | LUMEN | WATT |
|-----------------|------------------|-------|------|
| LSTR.NOV.055.XX | HL-PL04WCCXXYYZ0 | 5600  | 40   |
| LSTR.NOV.085.XX | HL-PL06WCCXXYYZ0 | 8400  | 60   |
| LSTR.NOV.110.XX | HL-PL08WCCXXYYZ0 | 11200 | 80   |
| LSTR.NOV.140.XX | HL-PL10WCCXXYYZ0 | 14000 | 100  |
| LSTR.NOV.170.XX | HL-PL12WCCXXYYZ0 | 16800 | 120  |
| LSTR.NOV.210.XX | HL-PL15WCCXXYYZ0 | 21000 | 150  |
| LSTR.NOV.260.XX | HL-PL18WCCXXYYZ0 | 25900 | 185  |
| LSTR.NOV.335.XX | HL-PL24WCCXXYYZ0 | 33600 | 240  |
| LSTR.NOV.420.XX | HL-PL30WCCXXYYZ0 | 42000 | 300  |
| LSTR.NOV.560.XX | HL-PL40WCCXXYYZ0 | 56000 | 400  |
| LSTR.NOV.700.XX | HL-PL50WCCXXYYZ0 | 70000 | 500  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K

## Cronos

lm/W  
130

120x60°

IP66

IK08/10

CRI  
>70

CLASS I

90-280  
VAC

PF>0,85

5 Years  
Warranty

100.000h

-25 | +60 °C



| CODE            | TYPE         | LUMEN | WATT |
|-----------------|--------------|-------|------|
| LSTR.CRO.060.XX | LED MZ7LD40  | 5800  | 40   |
| LSTR.CRO.085.XX | LED MZ7LD60  | 8400  | 60   |
| LSTR.CRO.120.XX | LED MZ7LD90  | 11700 | 90   |
| LSTR.CRO.155.XX | LED MZ7LD120 | 15600 | 120  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K

## Nano

**lm/W**  
130
 **150x70°**
**IP66**
**IK08**
**CRI**  
>70
 **CLASS** I/II

**90-280 VAC**
**PF>0,9**
**5 Years Warranty**
**100.000h**
**-30 | +60 °C**



| CODE            | TYPE              | LUMEN | WATT |
|-----------------|-------------------|-------|------|
| LSTR.NA3.008.XX | UNI-STA7STDT-NE-1 | 880   | 8    |
| LSTR.NA3.020.XX | UNI-STA7STDT-NE-1 | 2000  | 15   |
| LSTR.NA3.025.XX | UNI-STA7STDT-NE-2 | 2600  | 20   |
| LSTR.NA3.040.XX | UNI-STA7STDT-NE-3 | 4000  | 30   |
| LSTR.NA3.050.XX | UNI-STA7STDT-NE-4 | 5200  | 40   |
| LSTR.NA3.080.XX | UNI-STA7STDT-NE-5 | 8000  | 60   |
| LSTR.NA3.105.XX | UNI-ST07STDT-NE-1 | 10500 | 80   |
| LSTR.NA3.130.XX | UNI-ST07STDT-NE-2 | 13000 | 100  |
| LSTR.NA3.155.XX | UNI-ST07STDT-NE-3 | 15500 | 120  |
| LSTR.NA3.195.XX | UNI-ST07STDT-NE-4 | 19500 | 150  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K

## Rock

**lm/W**  
130
 **150x50°**
**IP65**
**IK08**
**CRI**  
>70
 **CLASS** I/II

**90-280 VAC**
**PF>0,95**
**5/7 Years Warranty**
**100.000h**
**-30 | +60 °C**



| CODE            | TYPE            | LUMEN | WATT |
|-----------------|-----------------|-------|------|
| LSTR.R13.040.XX | D-170S1LED30-16 | 3900  | 30   |
| LSTR.R13.050.XX | D-170S1LED40-24 | 5200  | 40   |
| LSTR.R13.080.XX | D-170S1LED60-24 | 7800  | 60   |
| LSTR.R13.100.XX | D-170SLED80-32  | 10400 | 80   |
| LSTR.R13.130.XX | D-170SLED100-48 | 13000 | 100  |
| LSTR.R13.150.XX | D-170MLED120-64 | 15600 | 120  |
| LSTR.R13.200.XX | D-170MLED150-64 | 19500 | 150  |
| LSTR.R13.240.XX | D-170MLED180-64 | 23400 | 180  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K

## Jade

lm/W  
120

150x75°

IP66

IK08/09

CRI  
>75

CLASS II

90-280  
VAC

PF>0,92

5 Years  
Warranty

100.000h

-30 | +60 °C



| CODE           | TYPE     | LUMEN | WATT |
|----------------|----------|-------|------|
| LSTR.JD.036.XX | JD-1047A | 3600  | 30   |
| LSTR.JD.048.XX | JD-1047B | 4800  | 40   |
| LSTR.JD.060.XX | JD-1047C | 6000  | 50   |
| LSTR.JD.072.XX | JD-1047D | 7200  | 60   |
| LSTR.JD.084.XX | JD-1047E | 8400  | 70   |
| LSTR.JD.120.XX | JD-1047F | 12000 | 100  |
| LSTR.JD.144.XX | JD-1047G | 14400 | 120  |
| LSTR.JD.180.XX | JD-1047H | 18000 | 150  |
| LSTR.JD.240.XX | JD-1047I | 24000 | 200  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K

## Ledolphin

lm/W  
150

140x80°

IP66

IK08/09

CRI  
>70

CLASS I/II

90-280  
VAC

PF>0,99

5 Years  
Warranty

120.000h

-30 | +60 °C



| CODE            | TYPE           | LUMEN | WATT |
|-----------------|----------------|-------|------|
| LSTR.LD3.020.XX | UNI-STA8-1-015 | 2250  | 15   |
| LSTR.LD3.035.XX | UNI-STA8-1-025 | 3750  | 25   |
| LSTR.LD3.050.XX | UNI-STA8-1-035 | 5250  | 35   |
| LSTR.LD3.065.XX | UNI-STA8-1-045 | 6750  | 45   |
| LSTR.LD3.090.XX | UNI-STA8-2-060 | 9000  | 60   |
| LSTR.LD3.135.XX | UNI-STA8-3-090 | 13500 | 90   |
| LSTR.LD3.180.XX | UNI-STA8-3-120 | 18000 | 120  |
| LSTR.LD3.225.XX | UNI-STA8-4-150 | 22000 | 150  |
| LSTR.LD3.270.XX | UNI-STA8-4-180 | 27000 | 180  |
| LSTR.LD3.300.XX | UNI-STA8-4-200 | 30000 | 200  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K





## ECO

lm/W  
105

140x80°

IP66

IK09/10

CRI  
>70

CLASS I/II

90-280  
VAC

PF>0,97

5/10 Years  
Warranty

150.000h

-40 | +65 °C

| CODE            | TYPE   | LUMEN | WATT |
|-----------------|--------|-------|------|
| LSTR.FE1.020.XX | ECO-8  | 2000  | 20   |
| LSTR.FE1.030.XX | ECO-12 | 3000  | 29   |
| LSTR.FE1.040.XX | ECO-16 | 3900  | 38   |
| LSTR.FE1.050.XX | ECO-24 | 5200  | 50   |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K



## Future Mini

lm/W  
105

140x80°

IP66

IK09/10

CRI  
>70

CLASS I/II

90-280  
VAC

PF>0,96

5/10 Years  
Warranty

150.000h

-40 | +65 °C

| CODE            | TYPE           | LUMEN | WATT |
|-----------------|----------------|-------|------|
| LSTR.FN1.040.XX | Future Mini-16 | 3800  | 38   |
| LSTR.FN1.055.XX | Future Mini-24 | 5700  | 55   |
| LSTR.FN1.080.XX | Future Mini-32 | 8000  | 73   |
| LSTR.FN1.100.XX | Future Mini-40 | 10000 | 90   |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K



## Future

lm/W  
105

140x80°

IP66

IK09/10

CRI  
>70

CLASS I/II

90-280  
VAC

PF>0,98

5/10 Years  
Warranty

150.000h

-40 | +65 °C

| CODE           | TYPE            | LUMEN | WATT |
|----------------|-----------------|-------|------|
| LSTR.F1.090.XX | Future-40 90W   | 9100  | 90   |
| LSTR.F1.115.XX | Future-48 110W  | 11500 | 110  |
| LSTR.F1.125.XX | Future-64 120W  | 12500 | 120  |
| LSTR.F1.145.XX | Future-64 140W  | 14500 | 140  |
| LSTR.F1.160.XX | Future-80 150W  | 16000 | 150  |
| LSTR.F1.190.XX | Future-80 180W  | 19000 | 180  |
| LSTR.F1.220.XX | Future-100 200W | 22000 | 200  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K



## Future Maxi

lm/W  
100

140x80°

IP66

IK09/10

CRI  
>70

CLASS I/II

90-280  
VAC

PF>0,98

5/10 Years  
Warranty

150.000h

-40 | +65 °C

| CODE            | TYPE            | LUMEN | WATT |
|-----------------|-----------------|-------|------|
| LSTR.FMX.215.XX | Future Maxi-96  | 21500 | 215  |
| LSTR.FMX.225.XX | Future Maxi-100 | 22500 | 225  |
| LSTR.FMX.250.XX | Future Maxi-112 | 25000 | 250  |
| LSTR.FMX.265.XX | Future Maxi-120 | 26500 | 265  |
| LSTR.FMX.285.XX | Future Maxi-128 | 28500 | 285  |
| LSTR.FMX.300.XX | Future Maxi-140 | 30000 | 300  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K

## HPS Street Light, Spark



35x120°

**IP66**

**IK09**

**CLASS I**



**220 VAC**




**1 Year Warranty**



**-40 | +60 °C**



| CODE         | TYPE             | SOCKET | WATT |
|--------------|------------------|--------|------|
| LSTR.MSP.070 | KN-STSP(HPS70W)  | E27    | 70   |
| LSTR.MSP.150 | KN-STSP(HPS150W) | E40    | 150  |
| LSTR.MSP.250 | KN-STSP(HPS250W) | E40    | 250  |

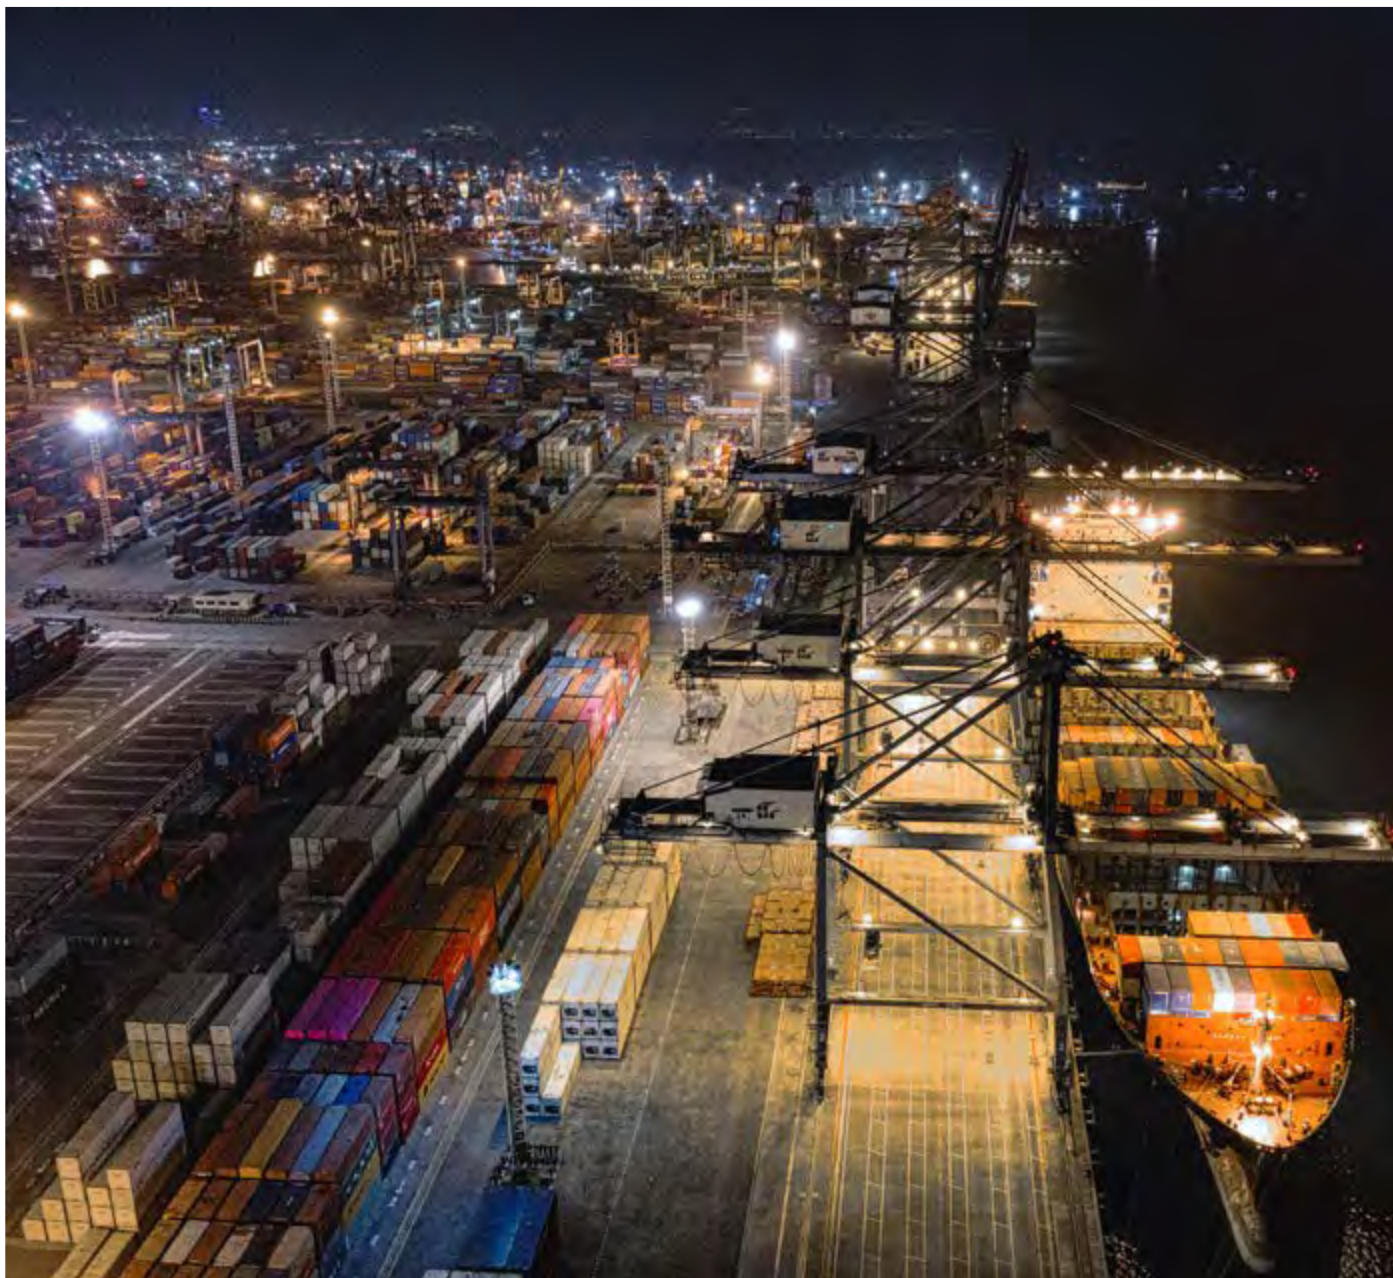

## Industrial **Lights for** **Airports, Ports, Logistics**

## Ariadne

lm/W  
140

IP66

IK08

120-277 | 277-480  
VAC

PF&gt;0,9

1.000.000h

| CODE           | TYPE      | LUMEN | WATT |
|----------------|-----------|-------|------|
| LHM.ARD.030.XX | HL-HP210W | 29400 | 210  |
| LHM.ARD.034.XX | HL-HP240W | 33600 | 240  |
| LHM.ARD.045.XX | HL-HP320W | 44800 | 320  |
| LHM.ARD.056.XX | HL-HP400W | 56000 | 400  |
| LHM.ARD.067.XX | HL-HP475W | 66500 | 475  |
| LHM.ARD.080.XX | HL-HP570W | 79800 | 570  |
| LHM.ARD.085.XX | HL-HP631W | 85000 | 631  |
| LHM.ARD.098.XX | HL-HP750W | 97500 | 750  |

\*XX=30 for 3000K XX=40 for 4000K XX=50 for 5000K XX=57 for 5700K





## Tunnel **Lights**

## T3

**lm/W** 115    **155x65°**    **IP67**    **IK08**    **CRI >70**    **CLASS I/II**  
**100-260 VAC**    **PF>0,95**    **5 Years Warranty**    **100.000h**    **-30 | +60 °C**



| CODE          | TYPE        | LUMEN | WATT |
|---------------|-------------|-------|------|
| LTU.T3.070.XX | DMTL-T3-060 | 6900  | 60   |
| LTU.T3.085.XX | DMTL-T3-075 | 8625  | 75   |
| LTU.T3.100.XX | DMTL-T3-090 | 10350 | 90   |
| LTU.T3.120.XX | DMTL-T3-105 | 12075 | 105  |
| LTU.T3.140.XX | DMTL-T3-120 | 13800 | 120  |
| LTU.T3.170.XX | DMTL-T3-150 | 17250 | 150  |
| LTU.T3.200.XX | DMTL-T3-180 | 20700 | 180  |
| LTU.T3.240.XX | DMTL-T3-210 | 24150 | 210  |
| LTU.T3.280.XX | DMTL-T3-240 | 27600 | 240  |
| LTU.T3.310.XX | DMTL-T3-270 | 31050 | 270  |
| LTU.T3.350.XX | DMTL-T3-300 | 34500 | 300  |

\*XX=30 for 3000K    XX=40 for 4000K    XX=50 for 5000K

## Bright Moon

**lm/W** 130    **140x80°**    **IP66**    **IK08**    **CRI >70**    **CLASS I/II**  
**90-280 VAC**    **PF>0,95**    **5 Years Warranty**    **100.000h**    **-30 | +50 °C**



| CODE          | TYPE       | LUMEN | WATT |
|---------------|------------|-------|------|
| LTU.BM.050.XX | UNI-TND3-1 | 5200  | 40   |
| LTU.BM.100.XX | UNI-TND3-2 | 10400 | 80   |
| LTU.BM.130.XX | UNI-TND3-3 | 13000 | 100  |
| LTU.BM.150.XX | UNI-TND3-3 | 15600 | 120  |
| LTU.BM.200.XX | UNI-TND3-4 | 20800 | 160  |
| LTU.BM.260.XX | UNI-TND3-5 | 26000 | 200  |
| LTU.BM.310.XX | UNI-TND3-6 | 31200 | 240  |

\*XX=30 for 3000K    XX=40 for 4000K    XX=50 for 5000K





Beam Angle



TUV certificate

AR111

Lamp Type



dimmable

Dimmable

UGR

Unified Glare Rating



Horizontal Adjustable

RA

Color Rendering Index



CE marking

4WIRE

4 wires



Input Voltage

0-10V

Dimming 0-10V

MAX<sub>pcs</sub>

Maximum pieces in row



Energy Class

DALI

Dimming Dali

G9

G9 Base

Years  
Warranty

Warranty

PC+PC

Polycarbonate+Polycarbonate Body

E14

E14 base



Counter

IK

Protection Against Mechanical Impacts

PC

Polycarbonate Body

IP

Ingress Protection Rating

lm/W

Lumen per Watt



GS Certificate



PF

Power Factor

SMD

SMD chip

m  
Height  
Coverage

Beam Light Length

RG-0

Risk Group

3PHASE

3 Phase



hs autonomy

Autonomy in hours



Temperature



LED

CRI

Colour Rendering Index

E27

E27 Base



UV

Ultra Violet

MAX  
W

Maximum Watt

PMMA

Acrylic Glass



Adjustable

CLASS

IEC Class

GU10

GU10 Base

# Notes

- Due to continuous improvements, product specifications can change without notice.
- The company is not responsible for any typographical errors.
- All rights reserved.

# GEYER

-  <https://www.facebook.com/geyerhellas>
-  <https://www.instagram.com/geyerhellas>
-  <https://www.linkedin.com/company/geyerhellas>
-  <https://www.youtube.com/user/geyerhellas>

## GEYER HELLAS


### Main Factory

-  Drosia Chalkis, Evia, Greece,  
Postal Code 34100
-  +30 22210-98711, +30 22210-97127
-  +30 22210-97144

### Thessaloniki branch

-  31 Filiras Str., P. Melas, Thessaloniki, Greece  
Postal Code 56429
-  +30 2310-544308, +30 2310-544853
-  +30 2310-544711
-  [cs@geyer.gr](mailto:cs@geyer.gr)

Designed by: [www.projectneverland.gr](http://www.projectneverland.gr)



WWW.GEYER.GR